



Accessories

Standard Series

Heavy Duty Series

Steel Series

Shock Absorbing

# AEROL

## FOREWORD

At Aerol, we believe that **mobility is mission-critical**—especially in environments where safety, performance, and precision cannot be compromised. From aerospace ground support to heavy-duty industrial carts and shock-sensitive systems, our casters are engineered not just to move—but to move smarter, safer, and longer.

As part of the **Caster Concepts family**, our American made casters continue to set the benchmark in consistency, dependability, and performance in environments that would destroy lesser products.

This catalog is more than a parts list—it's a gateway to building your perfect mobility system. Whether you're specifying for clean rooms, flight lines, or mobile industrial machinery, our enhanced catalog system makes it easier than ever to configure the right caster, wheel, brake, and lock combination.

From Air Force hangers to ship decks at sea, Aerol casters carry the weight of mission-critical reliability. We're proud to be a part of the systems that keep American industries moving forward.

### Engineered To Excel In Extreme Environments. Everytime.

Aerol corrosion resistant casters are sealed for life and require little to no maintenance depending on the application. They routinely remain in service for three to four decades and built to meet or exceed expectations in the harshest conditions on earth, from salt-laden sea air to the scorching heat of tarmacs. Every detail of our products—from proprietary **Aerolast™ tread formulations** to our **zero-pressure wheels**—are tested and trusted by engineers who can't afford downtime. And neither can you.

Aerol casters are 100% rebuildable, allowing customers to replace individual parts instead of entire assemblies. This design philosophy dramatically reduces lifetime ownership costs while maximizing uptime and reliability.

# INTRODUCTION

## Basic Caster Series Number

All casters identified under this system have a basic series number that describes the unit with respect to the following characteristics:

Characteristics	Code	Remarks
Swivel or Rigid	S or R	Every basic series number is prefixed by <b>S</b> or <b>R</b> .
Single or Dual Wheels	D	The next letter of the series code is " <b>D</b> " if the caster has two wheels.
Shock Absorbing	S	The Letter " <b>S</b> " appears if the Caster is spring mounted.
Heavy Duty Service Aluminum Casters	H	The letter " <b>H</b> " appears if the caster is designed for heavy duty service.
Welded Steel Construction	F	The letter " <b>F</b> " appears if the caster horn is of fabricated steel construction.
Caster Size	One or Two digits	The numerical suffix indicates the caster size in inches.

## Swivel Lock Code

If no swivel lock is required, the basic caster number is followed by **-0**. If an "**ELL**" handle swivel lock is required, the basic caster number is followed by **-1**. If a ring handle **S/L** is required, the basic caster number is followed by **-2**. It is necessary to indicate positively whether or not a swivel caster requires a swivel lock. No swivel lock code is required for rigid casters.

### Examples:

<b>S8</b>	8" swivel caster
<b>RSH10</b>	10" rigid shock absorbing heavy duty caster.

## Brake Code

Brake requirements are indicated by a one or two digit code as indicated below. When occasionally both a left and right hand brake are required on a dual wheel caster the appropriate code digits may be combined:

Code	Explanation
<b>-0</b>	No brake required.
<b>-1</b>	Aluminum pedal left hand footbrake.
<b>-2</b>	Aluminum pedal right hand footbrake.
<b>-3</b>	Steel pedal left hand footbrake.
<b>-4</b>	Steel pedal right hand footbrake.
<b>-5</b>	Axle brake for Airlite wheels, left hand.
<b>-6</b>	Axle brake for Airlite wheels, right hand.
<b>-7</b>	Footbrake for 6" casters only.

## Wheel Code

Wheels required are identified by a two letter wheel type code, and one or two digit wheel size code. For a Complete description of Aerol wheels, see page 6, 16 through 22, of the Aerol Industrial Wheel and Caster Catalog.

Code	Description
ER	Aerol wheel, rubber tread.
EL	Aerol wheel, Aerolast tread.
SR	Aerol seal wheel, rubber tread.
SL	Aerol sealwheel, Aerolast tread.
IR	Airlite wheel, rubber tread.
IL	Airlite wheel, Aerolast tread.
HR	Heavy duty Aerol seal wheel, rubber tread.
HL	Heavy duty Aerol seal wheel, Aerolast tread.
XR	Extra heavy duty wheel, rubber tread.
XL	Extra heavy duty wheel, Aerolast tread.
PN	Pneumatic wheel.
ZL	Light duty zero pressure wheel.
ZM	Medium duty zero pressure wheel.
ZH	Heavy duty zero pressure wheel.
VG	V groove wheel.
PL	Plastic wheel.
SW	55 series Aerol seal wheel.

Following the wheel type code, one or two digits indicates the wheel size.

### Examples:

ER6	6" Aerol wheel, rubber tread.
XL8.5	8.5" extra heavy duty wheel, Aerolast tread.
VG10	10" V groove wheel.

## Shock Absorbing Code

The spring requirements of a shock absorbing caster are indicated by a numerical suffix to the catalog number, using the required load rating in pounds to the closest even 50 lbs.

## Optional Base Plates

Several casters are available with optional mounting hole patterns. When optional baseplate "A" or "B" is required, the choice is indicated by a suffix letter "A" or "B" at the end of the catalog number.

# INDEX

Section	Description	Series	Page
I	Standard Casters	S3	1-1
		R3	1-2
	Swivel & Rigid	S5	1-3
		R5	1-4
		S6	1-5
		R6	1-6
		S8	1-7
		R8	1-8
		S10	1-9
		R10	1-10
		S12	1-11
		R12	1-12
II	Heavy Duty Casters (Use R5 - see pages 1-4)	SH5	2-1
			2-2
	Swivel & Rigid	SH6	2-3
		RH6	2-4
	Single & Dual	SH10	2-5
		RH10	2-6
	(Use RF12 -see pages 3-5)	SH12	2-7
			2-8
		SDH8	2-9
		SDH12	2-11
III	Steel Fabricated Casters	SF8	3-1
		RF8	3-2
		SF10	3-3
		RF10	3-4
		RF12	3-5
		SDF12	3-7
		IV	Shock Absorbing Casters
RS6	4-2		
Standard & Heavy Duty	SS8		4-3
	RS8		4-4
Single & Dual	SS10		4-5
	RS10		4-6
	SSH10		4-7
	RSH10		4-8
	SSH12		4-9
	RSH12		4-10
	SDSH10		4-11
	SDSH12		4-12

# Accessories

**-1 & -5 Type Swivel Lock**  
**-2 & -6 are similar but with ring handle**



**-4 Type Swivel Lock**  
**-3 is similar but with ELL handle**



## Aerol Swivel Locks

Since publication of the Aerol supplemental catalog numbering system, there has been a significant increase in the types of swivel locks available for use with Aerol casters. The following is an explanation of the numerical code designed to assist you, the customer, in the selection of the most suitable swivel lock for your particular application. The proper swivel lock dash number should follow the basic caster number when ordering by the Aerol supplemental catalog numbering system. If a swivel lock is not required, indicate by **-0**. No swivel lock designation is required for rigid casters.

Aerol produces three basic swivel locks, each available with either an "ELL" handle, or a ring handle.

The Standard swivel lock has a die cast aluminum body and is attached to the caster base plate by means of two cap screws. This swivel lock is designated by **-1** when an "ELL" handle is desired and by **-2** for a ring handle.

The second basic type of swivel lock has a permanent mold aluminum body, and is attached to the caster by means of the caster mounting bolts. For this reason it is delivered as a loose item that must be installed by the customer. To procure this style swivel lock with an "ELL" handle, use the designation **-3**, and for a ring handle **-4**. The two mounting bolts that secure the swivel lock must be  $\frac{3}{8}$ " longer than would otherwise be required.

The third basic swivel lock type is similar to the standard lock in that it is attached to the caster base plate by means of two cap screws, but it has a high strength stainless steel body produced by the investment casting technique. This swivel lock may be procured with an "ELL" handle by the designation **-5**, and with a ring handle by **-6**.

Experience has shown that for casters in the "Heavy Duty" series, size 10" and larger, and for all casters in the "SF" series, the service requirements dictate the use of a heavy duty swivel lock. For this reason Aerol will supply the steel bodied swivel lock (**-5** or **-6**) when orders for casters in these categories indicate the die-cast swivel lock (**-1** or **-2**).

Discover how Aerol can meet your challenges head-on with advanced mobility solutions.  
Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

# Accessories

## Toe Guards

Often used as a safety device, Aerol toe guards for casters are mounted  $\frac{1}{2}$ " off the floor. This enables industrial casters to move easily on many types of floors while maintaining a solid barrier between personnel and obstacles within manufacturing environments.



## Floor Locks

Aerol floor locks have an industry leading all aluminum robust design. When you needed added braking but don't want the added weight. The over center linkage design and innovative built in automatic adjustment ensure these floor locks work every time.

A large circular rubberized landing pad also helps tools adjust to uneven floors. Floor locks are typically used as a parking brake when a tool or stand is being parked or being worked on top of. When caster brakes are not enough, use a floor lock to ensure platforms won't move while increasing stability.

## Caster Brakes

Aerol's Caster Brakes were designed to meet the same stringent military and aerospace standards to pair with the robust caster line up. With an industry leading cast aluminum bodies design, there is no equal in caster brakes on the market. With industry leading innovative designs you can be sure there is an Aerol brake that will meet your needs on all casters in the Aerol line up.

Configurations can be specified in an all-aluminum or all cast iron bodies. Whether weight is critical to a tool design or strength, all Aerol brakes live up to the task of controlling apparatus movement. Good caster brakes are a critical part of tool and manufacturing operations. Many of Aerol's brakes meet or exceed aerospace and Mil-Spec standards to ensure personnel remain safe while on the job.



DUAL WHEEL BRAKES



RIGHT HAND BRAKE



LEFT HAND BRAKE



MUSTACHE BRAKE



FACE CONTACT BRAKE



DEADMAN BRAKE



LATCH BRAKE



AXLE BRAKE

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438



# Rigid Caster and Wheel Assembly

**R3  
SERIES**

Accessories


Standard Series

Heavy Duty Series

Steel Series

Shock Absorbing

Aerol Supplemental Catalog Numbering System 1-2

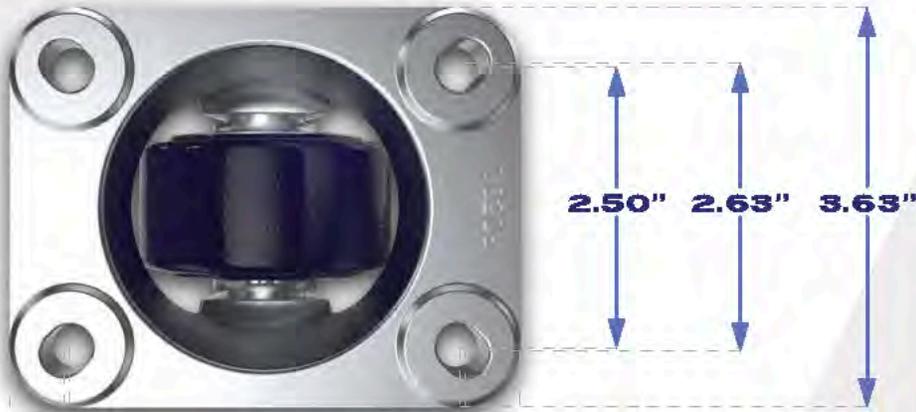

Four Mounting Holes for 3/8" Diameter Bolts.



Brake Availability:  
-0 No Brake

EXAMPLE:

**RS-0-EL3**




MAX CASTER LOAD  
RATING @ 5MPH

CODE	DESCRIPTION	LOAD RANGE - (LBS.)																			
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
ER3	3" Aerol Wheel, Rubber Tread	█		█		█		█		█		█		█		█		█		█	
EL3	3" Aerol Wheel, Aerolast Tread	█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█		█		█		█		█		█		█	
		█		█		█		█													

# Swivel Caster and Wheel Assembly

**S5**  
**SERIES**

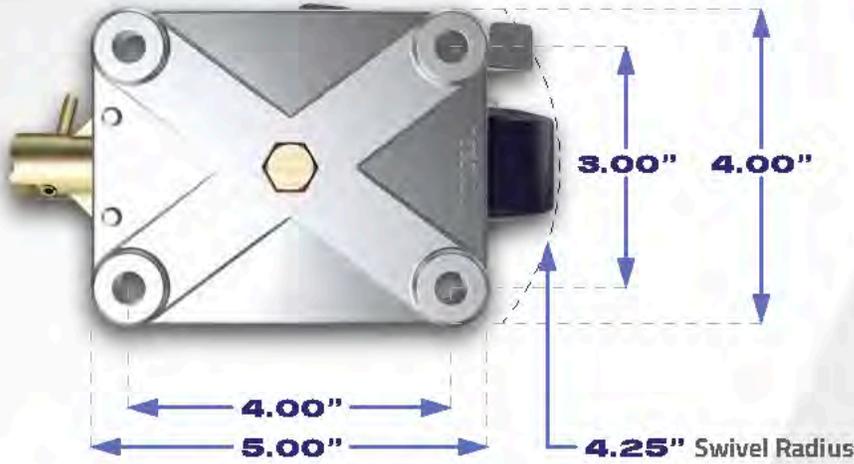

Four Mounting Holes for  
3/8" Diameter Bolts.



**Swivel Lock Availability:**

- 0 No Swivel Lock
- 1 "L" Handle Swivel Lock

**Brake Availability:**

- 0 No Brake
- 5 Axel Brake, Left Hand\*
- 6 Axel Brake, Right Hand\*

\*With IR4, IL4, IR5, & IL5 Wheel Only

**EXAMPLE:**

**S5-1-5-IR5**



MAX CASTER LOAD  
RATING @ 5MPH


CODE	DESCRIPTION	LOAD RANGE - (LBS.)																			
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
ER4	4" Aerol Wheel, Rubber Tread																				
EL4	4" Aerol Wheel, Aerolast Tread																				
IR4	4" Airlite Wheel, Rubber Tread																				
IL4	4" Airlite Wheel, Aerolast Tread																				
ER5	5" Aerol Wheel, Rubber Tread																				
EL5	5" Aerol Wheel, Aerolast Tread																				
SRS	5" Aerol Seal Wheel, Rubber Tread																				
SL5	5" Aerol Seal Wheel, Aerolast Tread																				
IR5	5" Airlite Wheel, Aerolast Tread																				
IL5	5" Airlite Wheel, Rubber Tread																				
PL4	4" Plastic Wheel																				
PL5	5" Plastic Wheel																				

Discover how Aerol can meet your challenges head-on with advanced mobility solutions.  
Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

**S5**  
**SERIES**

# Rigid Caster and Wheel Assembly

## R5 SERIES

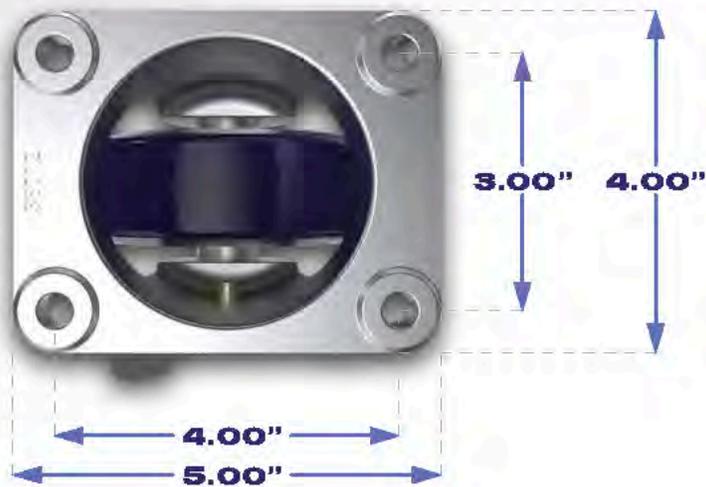

Four Mounting Holes for 3/8" Diameter Bolts.



### Brake Availability:

- 0 No Brake
- 5 Axel Brake, Left Hand\*

\*With IR4, IL4, IR5, & IL5 Wheel Only

### EXAMPLE:

**R5-0-PL5**



MAX CASTER LOAD  
RATING @ 5MPH


CODE	DESCRIPTION	LOAD RANGE - (LBS.)																			
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
ER4	4" Aerol Wheel, Rubber Tread																				
EL4	4" Aerol Wheel, Aerolast Tread																				
IR4	4" Airlite Wheel, Rubber Tread																				
IL4	4" Airlite Wheel, Aerolast Tread																				
ER5	5" Aerol Wheel, Rubber Tread																				
EL5	5" Aerol Wheel, Aerolast Tread																				
SR5	5" Aerol Seal Wheel, Rubber Tread																				
SL5	5" Aerol Seal Wheel, Aerolast Tread																				
IR5	5" Airlite Wheel, Aerolast Tread																				
IL5	5" Airlite Wheel, Rubber Tread																				
PL4	4" Plastic Wheel																				
PL5	5" Plastic Wheel																				

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## R5 SERIES

# Swivel Caster and Wheel Assembly

**S6**  
**SERIES**

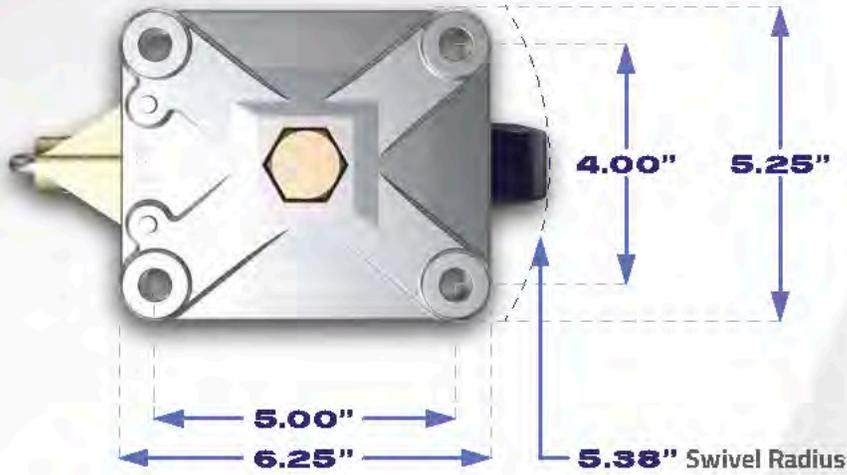

Four Mounting Holes for  
1/2" Diameter Bolts.



**Swivel Lock Availability:**

- 0 No Swivel Lock
- 1 "L" Handle Swivel Lock

**Brake Availability:**

- 0 No Brake
- 7 Foot Brake

**EXAMPLE:**

**S6-1-7-SL6**



CODE	DESCRIPTION	LOAD RANGE (LBS.)																				
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000	
ERE	6" Aerol Wheel, Rubber Tread																					
ELB	6" Aerol Wheel, Aerolast Tread																					
SR6	6" Aerol Seal Wheel, Rubber Tread																					
SL6	6" Aerol Seal Wheel, Aerolast Tread																					
IRE	6" Airlite Wheel, Rubber Tread																					
ILB	6" Airlite Wheel, Aerolast Tread																					
ZLB	6" Light Duty, Zero Pressure Wheel & Tire																					
ZMB	6" Medium Duty, Zero Pressure Wheel & Tire																					
ZHB	6" Heavy Duty, Zero Pressure Wheel & Tire																					
PLB	6" Plastic Wheel																					
SW6	6" '55 Series Aerol Seal Wheel																					
V66	6" Steel "V" Groove Wheel																					


MAX CASTER LOAD  
RATING @ 5MPH

Discover how Aerol can meet your challenges head-on with advanced mobility solutions.  
Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

**S6**  
**SERIES**

# Rigid Caster and Wheel Assembly

## R6 SERIES

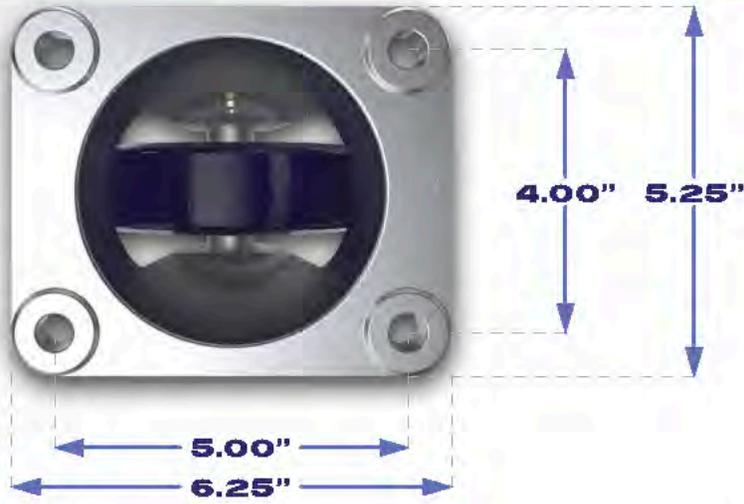

Four Mounting Holes for 1/2" Diameter Bolts.



### Brake Availability:

- 0 No Brake
- 5 Axel Brake, Left Hand\*

\*With IR6 and IL6 Wheels Only

### EXAMPLE:

**R6-5-IL6**




CODE	DESCRIPTION	MAX CASTER LOAD RATING @ 5MPH																			
		LOAD RANGE (LBS.)																			
ERE	6" Aerol Wheel, Rubber Tread	0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
EL6	6" Aerol Wheel, Aerolast Tread	0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
SR6	6" Aerol Seal Wheel, Rubber Tread	0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
SL6	6" Aerol Seal Wheel, Aerolast Tread	0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
IR6	6" Airrite Wheel, Rubber Tread	0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
IL6	6" Airrite Wheel, Aerolast Tread	0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
ZLB	6" Light Duty, Zero Pressure Wheel & Tire	0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
ZME	6" Medium Duty, Zero Pressure Wheel & Tire	0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
ZHE	6" Heavy Duty, Zero Pressure Wheel & Tire	0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
PL6	6" Plastic Wheel	0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
SWE	6" '55 Series Aerol Seal Wheel	0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
V66	6" Steel 'V' Groove Wheel	0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438


## R6 SERIES

# Swivel Caster and Wheel Assembly

## S8 SERIES

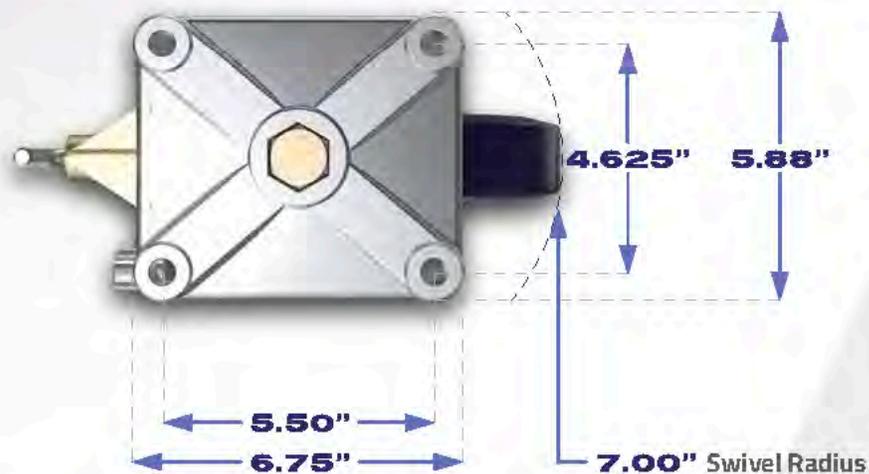

Four Mounting Holes for 1/2" Diameter Bolts.

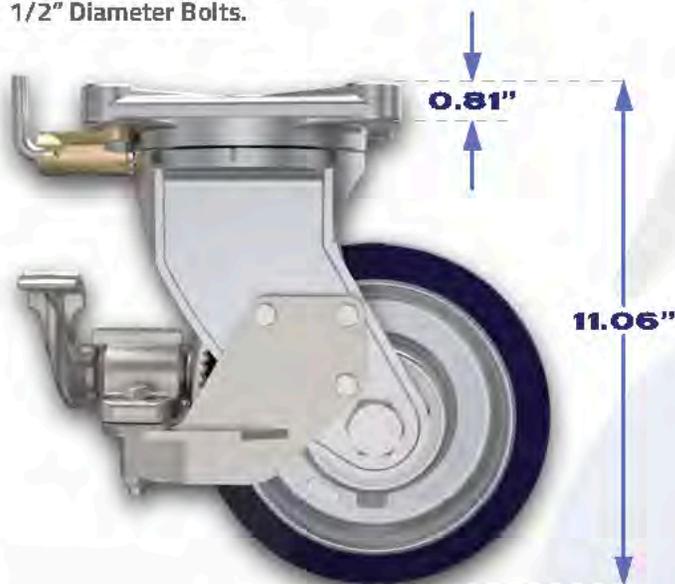

### Swivel Lock Availability:

- 0 No Swivel Lock
- 1 "L" Handle Swivel Lock

### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

### EXAMPLE:

**S8-1-4-ZM8**



### Optional Base Plate Bolt Patterns:

- A: 4 7/8 x 4 1/2 for 1/2" Bolts
- B: 3 3/8 x 5 1/4 for 1/2" Bolts


CODE	DESCRIPTION	MAX CASTER LOAD RATING @ 5MPH																		
		LOAD RANGE -- (LBS.)																		
ERB	B' Aerol Wheel, Rubber Tread																			
ELB	B' Aerol Wheel, Aerolast Tread																			
SRB	B' Aerol Seal Wheel, Rubber Tread																			
SLB	B' Aerol Seal Wheel, Aerolast Tread																			
IRB	B' Airlite Wheel, Rubber Tread																			
ILB	B' Airlite Wheel, Aerolast Tread																			
PNB	B' Pneumatic Wheel																			
ZLB	B' Light Duty, Zero Pressure Wheel																			
ZMB	B' Medium Duty, Zero Pressure Wheel																			
ZHB	B' Heavy Duty, Zero Pressure Wheel																			
PLB	B' Plastic Wheel																			
SWB	B' '55 Series Aerol Seal Wheel																			

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## S8 SERIES

# Rigid Caster and Wheel Assembly

## R8 SERIES

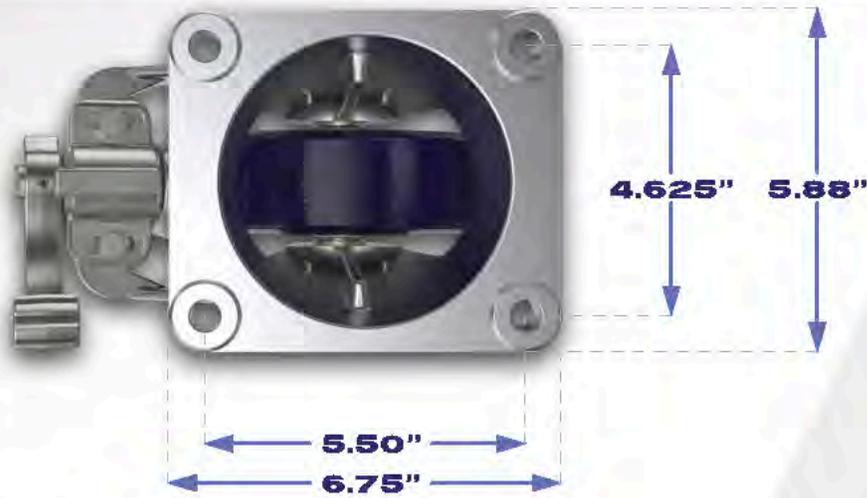

Four Mounting Holes for 1/2" Diameter Bolts.



### Brake Availability: (Proposed)

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

### EXAMPLE:

**R8-0-IR8**




CODE	DESCRIPTION	MAX CASTER LOAD RATING @ 5MPH																		
		LOAD RANGE -- (LBS.)																		
ERB	8" Aerol Wheel, Rubber Tread																			
ELB	8" Aerol Wheel, Aerolast Tread																			
SRB	8" Aerol Seal Wheel, Rubber Tread																			
SLB	8" Aerol Seal Wheel, Aerolast Tread																			
IRB	8" Airlite Wheel, Rubber Tread																			
ILB	8" Airlite Wheel, Aerolast Tread																			
PNB	8" Pneumatic Wheel																			
ZLB	8" Light Duty, Zero Pressure Wheel																			
ZMB	8" Medium Duty, Zero Pressure Wheel																			
ZHB	8" Heavy Duty, Zero Pressure Wheel																			
PLB	8" Plastic Wheel																			
SWB	8" '55 Series Aerol Seal Wheel																			

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## R8 SERIES

# Swivel Caster and Wheel Assembly

## S10 SERIES

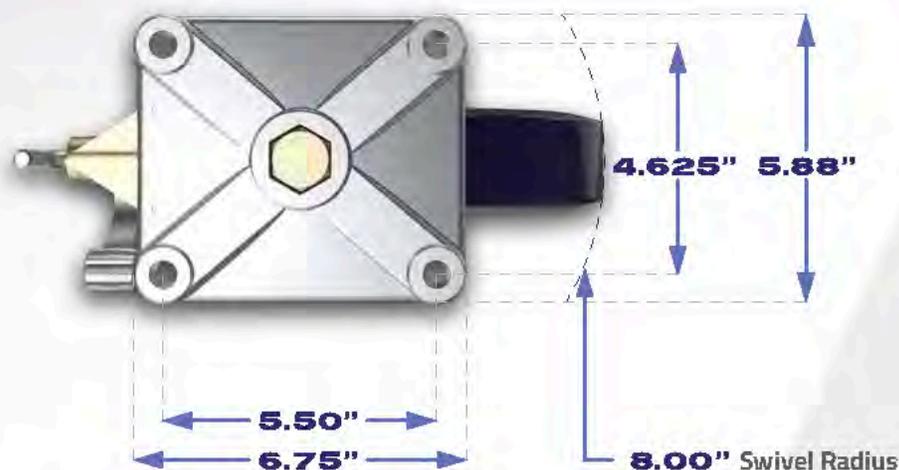

Four Mounting Holes for  
1/2" Diameter Bolts.



### Swivel Lock Availability:

- 0 No Swivel Lock
- 1 "L" Handle Swivel Lock

### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

### EXAMPLE:

**S10-0-3-EL10**



### Optional Base Plate Bolt Patterns:

- A: 4 7/8 x 4 1/2 for 1/2" Bolts
- B: 3 3/8 x 5 1/4 for 1/2" Bolts

CODE	DESCRIPTION	LOAD RANGE - (LBS.)																					
		0	100	200	300	400	500	600	700	800	900	1000	1500	2000	3000	4000	5000	6000	7000	8000	9000	10,000	
ER10	10" Aerol Wheel, Rubber Tread																						
EL10	10" Aerol Wheel, Aerolast Tread																						
SR10	10" Aerol Seal Wheel, Rubber Tread																						
SL10	10" Aerol Seal Wheel, Aerolast Tread																						
IR10	10" Airlite Wheel, Rubber Tread																						
IL10	10" Airlite Wheel, Aerolast Tread																						
PN10	10" Pneumatic Wheel																						
ZL10	10" Light Duty, Zero Pressure Wheel																						
ZM10	10" Medium Duty, Zero Pressure Wheel																						
ZH10	10" Heavy Duty, Zero Pressure Wheel																						

Discover how Aerol can meet your challenges head-on with advanced mobility solutions.  
Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## S10 SERIES

# Swivel Caster and Wheel Assembly

## R10 SERIES

Accessories


Standard Series

Heavy Duty Series

Steel Series

Shock Absorbing

Aerol Supplemental Catalog Numbering System 1-10

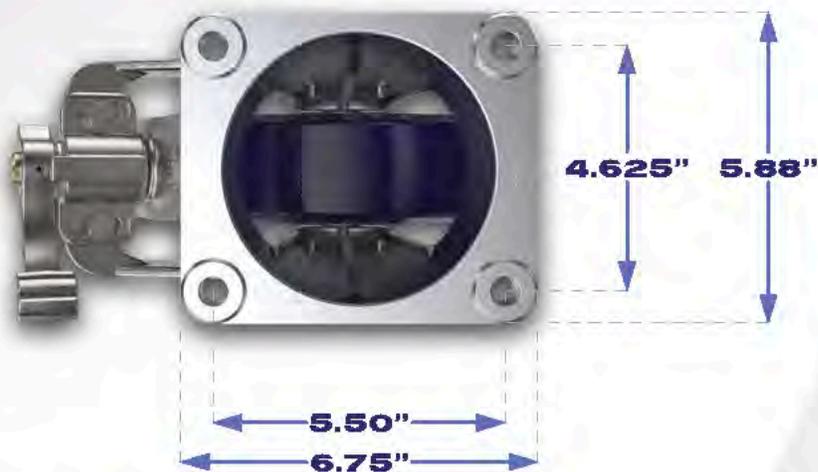

Four Mounting Holes for  
1/2" Diameter Bolts.



### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

### EXAMPLE:

**R10-4-PN-10**



CODE	DESCRIPTION	LOAD RANGE - (LBS.)																				
		0	100	200	300	400	500	600	700	800	900	1000	1500	2000	3000	4000	5000	6000	7000	8000	9000	10,000
ER10	10" Aerol Wheel, Rubber Tread																					
EL10	10" Aerol Wheel, Aerolast Tread																					
SR10	10" Aerol Seal Wheel, Rubber Tread																					
SL10	10" Aerol Seal Wheel, Aerolast Tread																					
IR10	10" Airlite Wheel, Rubber Tread																					
IL10	10" Airlite Wheel, Aerolast Tread																					
PN10	10" Pneumatic Wheel																					
ZL10	10" Light Duty, Zero Pressure Wheel																					
ZM10	10" Medium Duty, Zero Pressure Wheel																					
ZH10	10" Heavy Duty, Zero Pressure Wheel																					

Discover how Aerol can meet your challenges head-on with advanced mobility solutions.  
Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## R10 SERIES

# Swivel Caster and Wheel Assembly

## S12 SERIES

Accessories


Standard Series

Heavy Duty Series

Steel Series

Shock Absorbing

Aerol Supplemental Catalog Numbering System 1-12

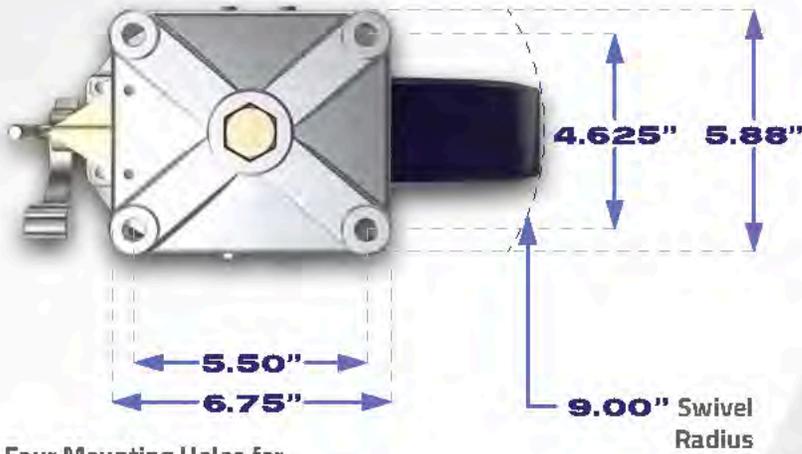


Four Mounting Holes for 1/2" Diameter Bolts.

### Swivel Lock Availability:

- 0 No Swivel Lock
- 1 "L" Handle Swivel Lock

### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

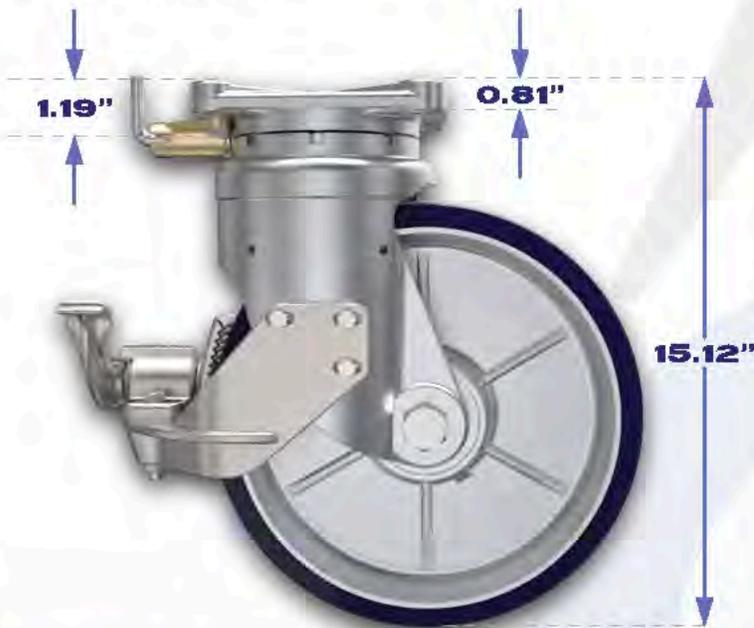

### EXAMPLE:

**S12-1-3-SL12**



### Optional Base Plate Bolt Patterns:

- A: 4 1/8" x 4 1/2" for 1/2" Bolts
- B: 3 3/8" x 5 1/2" for 1/2" Bolts


CODE	DESCRIPTION	LOAD RANGE - (LBS.)																		
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000
ER12	12" Aerol Wheel, Rubber Tread	[Load Range Bar]																		
EL12	12" Aerol Wheel, Aerolast Tread	[Load Range Bar]																		
5R12	12" Aerol Seal Wheel, Rubber Tread	[Load Range Bar]																		
5L12	12" Aerol Seal Wheel, Aerolast Tread	[Load Range Bar]																		
IR12	12" Airlite Wheel, Rubber Tread	[Load Range Bar]																		
IL12	12" Airlite Wheel, Aerolast Tread	[Load Range Bar]																		
ZL12	12" Light Duty, Zero Pressure Wheel	[Load Range Bar]																		
ZM12	12" Medium Duty, Zero Pressure Wheel	[Load Range Bar]																		
ZH12	12" Heavy Duty, Zero Pressure Wheel	[Load Range Bar]																		

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## S12 SERIES

# Rigid Caster and Wheel Assembly

## R12 SERIES

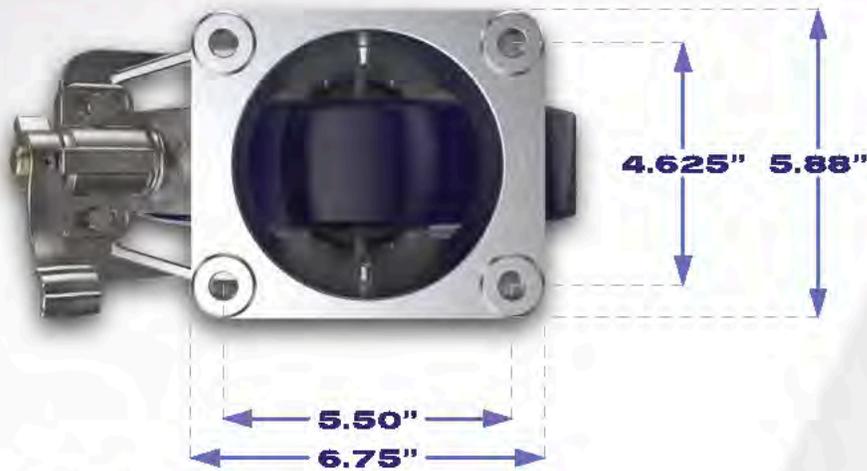

Four Mounting Holes for 1/2" Diameter Bolts.



### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

### EXAMPLE:

**R12-1-IR12**



MAX CASTER LOAD RATING @ 5MPH

CODE	DESCRIPTION	LOAD RANGE - (LBS.)																			
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
ER12	12" Aeral Wheel, Rubber Tread	█																			
EL12	12" Aeral Wheel, Aerolast Tread	█																			
5R12	12" Aeral Seal Wheel, Rubber Tread	█																			
5L12	12" Aeral Seal Wheel, Aerolast Tread	█																			
IR12	12" Airlite Wheel, Rubber Tread	█																			
1L12	12" Airlite Wheel, Aerolast Tread	█																			
ZL12	12" Light Duty, Zero Pressure Wheel	█		█		█		█		█											
ZM12	12" Medium Duty, Zero Pressure Wheel	█		█		█		█		█											
ZH12	12" Heavy Duty, Zero Pressure Wheel	█		█		█		█		█											

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## R12 SERIES

# Heavy Duty Swivel Caster and Wheel Assembly

## SH5 SERIES

Accessories


Standard Series

Heavy Duty Series

Steel Series

Shock Absorbing

Aerol Supplemental Catalog Numbering System 2-1

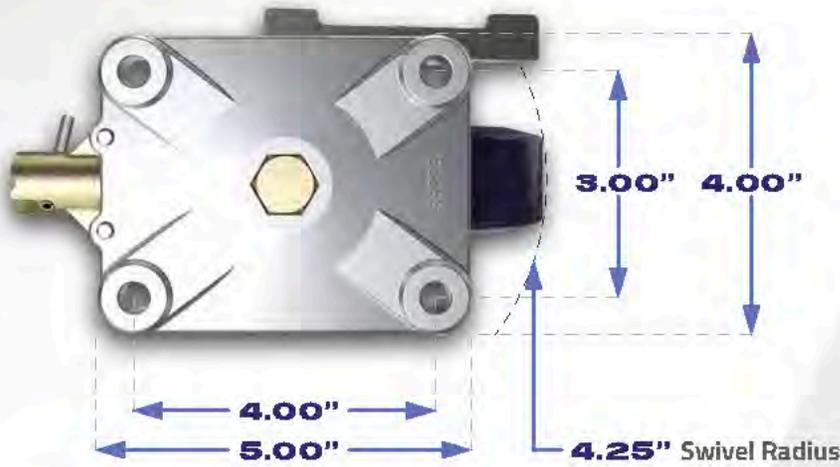

Four Mounting Holes for 3/8" Diameter Bolts.

### Swivel Lock Availability:

- 0 No Swivel Lock
- 1 "L" Handle Swivel Lock

### Brake Availability:

- 0 No Brake
- 5 Axle Brake, Left Hand\*
- 6 Axle Brake, Right Hand\*

\*With Airlite Wheels Only



### EXAMPLE:

**SH5-0-5-IL5**



MAX CASTER LOAD  
RATING @ 5MPH

CODE	DESCRIPTION	LOAD RANGE - (LBS.)																			
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
ER4	4" Aerol Wheel, Rubber Tread																				
EL4	4" Aerol Wheel, Aerolast Tread																				
IR4	4" Airlite Wheel, Rubber Tread																				
IL4	4" Airlite Wheel, Aerolast Tread																				
ER5	5" Aerol Wheel, Rubber Tread																				
EL5	5" Aerol Wheel, Aerolast Tread																				
SR5	5" Aerol Seal Wheel, Rubber Tread																				
SL5	5" Aerol Seal Wheel, Aerolast Tread																				
IR5	5" Airlite Wheel, Rubber Tread																				
IL5	5" Airlite Wheel, Aerolast Tread																				
PL4	4" Plastic Wheel																				
PL5	5" Plastic Wheel																				

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## SH5 SERIES






# Heavy Duty Swivel Caster and Wheel Assembly

## SH10 SERIES



Four Mounting Holes for 1/2" Diameter Bolts.

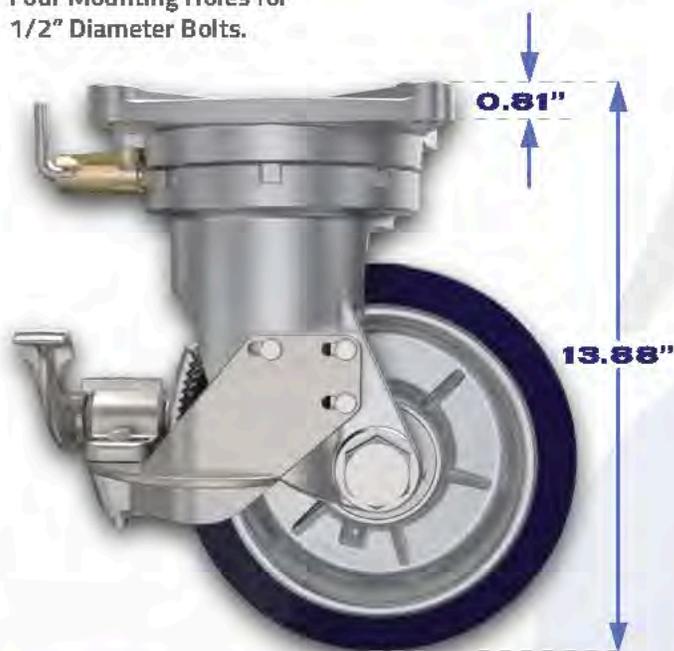

### Swivel Lock Availability:

- 0 No Swivel Lock
- 1 "L" Handle Swivel Lock

### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

### EXAMPLE:

**SH10-1-1-PL10**



### Optional Base Plate Bolt Patterns:

- A: 4 7/8" x 6 3/4" for 5/8" Bolts
- B: 6 1/2" x 8 3/4" for 1/2" Bolts


CODE	DESCRIPTION	LOAD RANGE - (LBS.)																			
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
HR10	10" Heavy Duty Aerol Seal Wheel, Rubber Tread																				
HL10	10" Heavy Duty Aerol Seal Wheel, Aerolast Tread																				
XR8.5	8.5" Extra Heavy Duty Wheel, Rubber Tread																				
XLB.5	8.5" Extra Heavy Duty Wheel, Aerolast Tread																				
XR10	10" Extra Heavy Duty Wheel, Rubber Tread																				
XL10	10" Extra Heavy Duty Wheel, Aerolast Tread																				
PN10.5	10.5" Pneumatic Wheel																				
VGB	8" "V" Groove Wheel																				
V610	10" "V" Groove Wheel																				
PL10	10" Plastic Wheel																				
SW10	10" '55 Series Aerol Seal Wheel																				

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## SH10 SERIES

# Heavy Duty Rigid Caster and Wheel Assembly

## RH10 SERIES

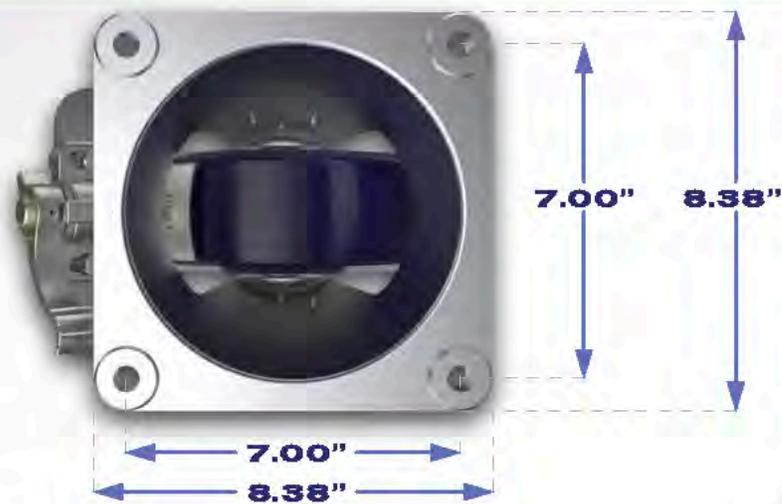

Four Mounting Holes for 1/2" Diameter Bolts.



### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

### EXAMPLE:

**RH10-3-HL10**




CODE	DESCRIPTION	LOAD RANGE - (LBS.)																				
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000	
HR10	10" Heavy Duty Aerol Seal Wheel, Rubber Tread																					
HL10	10" Heavy Duty Aerol Seal Wheel, Aerolast Tread																					
XRB.5	8.5" Extra Heavy Duty Wheel, Rubber Tread																					
XLB.5	8.5" Extra Heavy Duty Wheel, Aerolast Tread																					
XR10	10" Extra Heavy Duty Wheel, Rubber Tread																					
XL10	10" Extra Heavy Duty Wheel, Aerolast Tread																					
PN10.5	10.5" Pneumatic Wheel																					
VGB	8" "V" Groove Wheel																					
V610	10" "V" Groove Wheel																					
PL10	10" Plastic Wheel																					
SW10	10" 55 Series Aerol Seal Wheel																					

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438


## RH10 SERIES

# Heavy Duty Swivel Caster and Wheel Assembly

## SH12 SERIES

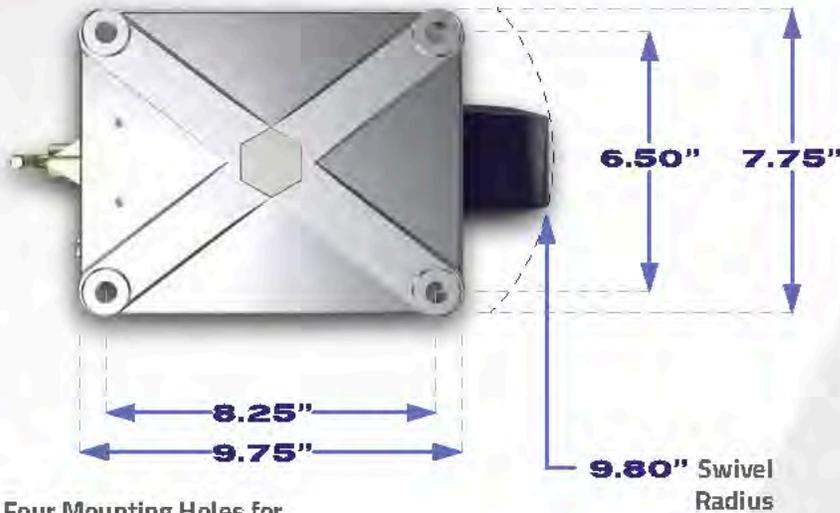

Four Mounting Holes for 1/2" Diameter Bolts.

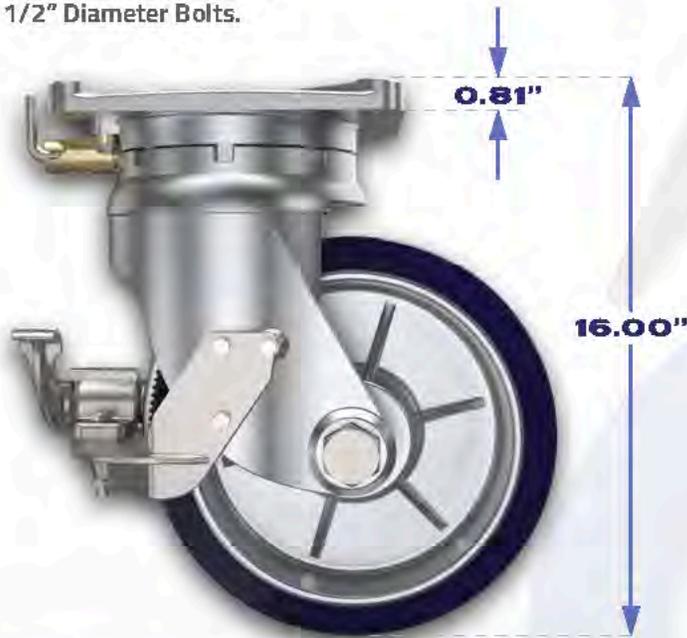

### Swivel Lock Availability:

- 0 No Swivel Lock
- 1 "L" Handle Swivel Lock

### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

\*Foot Brakes Available With 12" Wheels Only

### EXAMPLE:

**SH12-1-0-XR12**



### Optional Base Plate Bolt Patterns:

- A: 4 7/8 x 6 3/4 for 5/8" Bolts
- B: 7 x 7 for 1/2" Bolts


CODE	DESCRIPTION	LOAD RANGE - (LBS.)																			
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
HR12	12" Heavy Duty Aerol Seal Wheel, Rubber Tread																				
HL12	12" Heavy Duty Aerol Seal Wheel, Aerolast Tread																				
XR9.5	9.5" Extra Heavy Duty Wheel, Rubber Tread																				
XL9.5	9.5" Extra Heavy Duty Wheel, Aerolast Tread																				
XR10	10" Extra Heavy Duty Wheel, Rubber Tread																				
XL10	10" Extra Heavy Duty Wheel, Aerolast Tread																				
XR12	12" Extra Heavy Duty Wheel, Rubber Tread																				
XL12	12" Extra Heavy Duty Wheel, Aerolast Tread																				
VG12	12" V Groove Wheel																				

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## SH12 SERIES

# Heavy Duty, Dual Swivel Caster and Wheel Assembly

## SDH8 SERIES

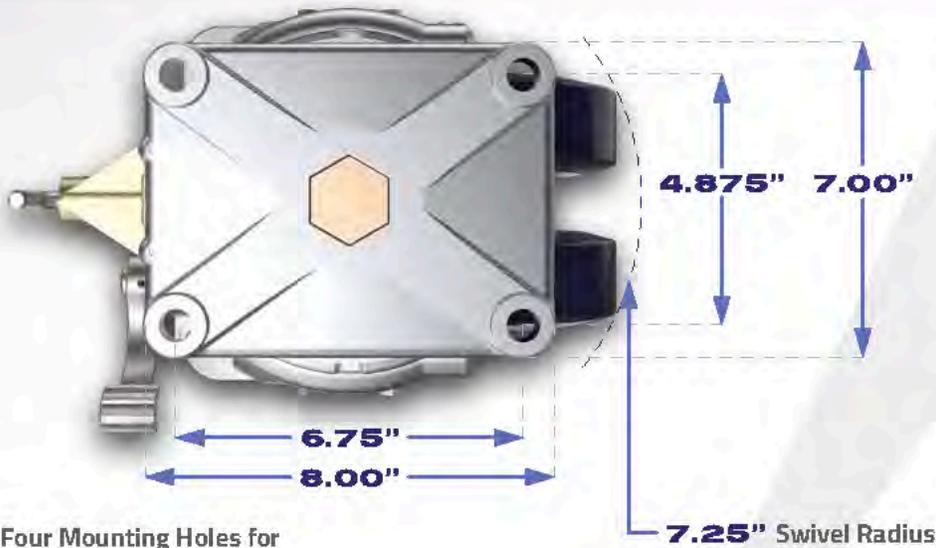


Four Mounting Holes for 5/8" Diameter Bolts.

### Swivel Lock Availability:

- 0 No Swivel Lock
- 1 "L" Handle Swivel Lock

### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

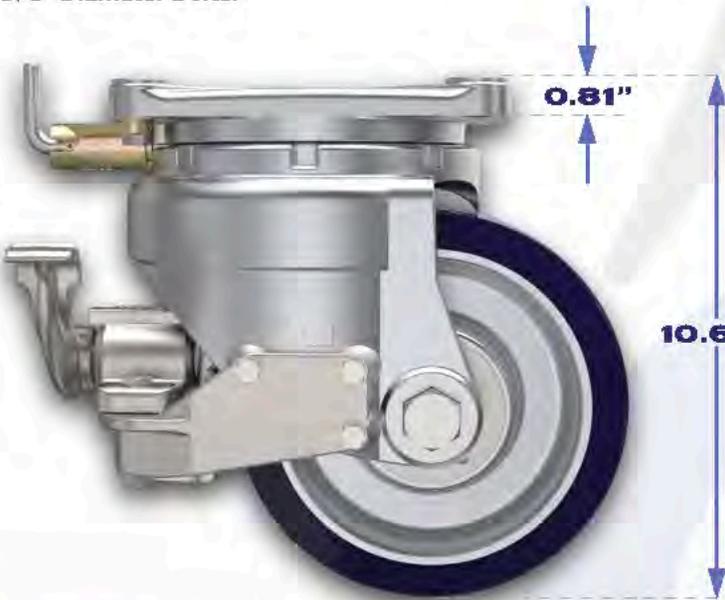

### EXAMPLE:



\* MAX CASTER LOAD RATING @ 5MPH

CODE	DESCRIPTION	LOAD RANGE - (LBS)																			
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
ERB	8" Aeral Wheel, Rubber Tread																				
ELB	8" Aeral Wheel, Aerolast Tread																				
5RB	8" Aeral Seal Wheel, Rubber Tread																				
5LB	8" Aeral Seal Wheel, Aerolast Tread																				
IRB	8" Airlite Wheel, Rubber Tread																				
ILB	8" Airlite Wheel, Aerolast Tread																				
PNB	8" Pneumatic Wheel																				
ZLB	8" Light Duty Zero Pressure Wheel																				
ZMB	8" Medium Duty Zero Pressure Wheel																				
ZHB	8" Heavy Duty Zero Pressure Wheel																				
PLB	8" Plastic Wheel																				
5WB	8" 55 Series Aeral Seal Wheel																				


\*chart indicates load rating for DNE wheel

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## SDH8 SERIES

# Heavy Duty, Dual Swivel Caster and Wheel Assembly

## SDH12 SERIES

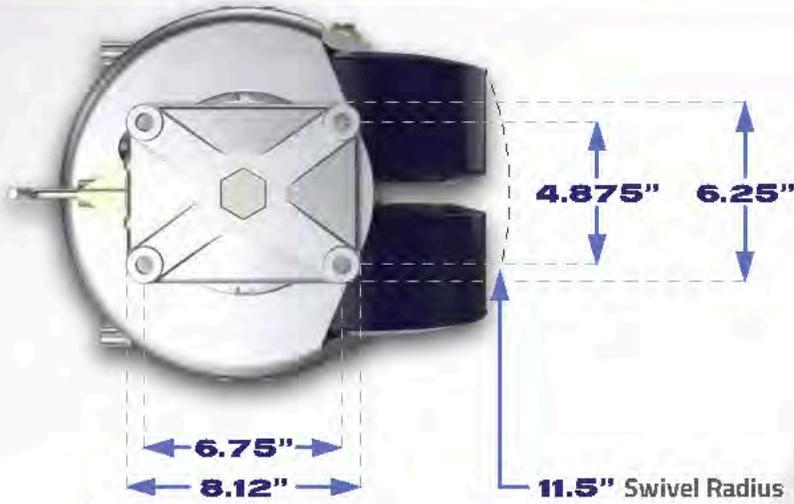

Four Mounting Holes for 5/8" Diameter Bolts.



### Swivel Lock Availability:

- 0 No Swivel Lock
- 1 "L" Handle Swivel Lock

### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

For Two Brakes Use -12 or -34

### EXAMPLE:

**SDH12-1-34-XR12**



\*MAX CASTER LOAD RATING @ 5MPH

CODE	DESCRIPTION	LOAD RANGE - (LBS.)																		
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000
XR10	10" Extra Heavy Duty Wheel, Rubber Tread	[Load Range Chart]																		
XL10	10" Extra Heavy Duty Wheel, Aerolast Tread	[Load Range Chart]																		
XR12	12" Extra Heavy Duty Wheel, Rubber Tread	[Load Range Chart]																		
XL12	12" Extra Heavy Duty Wheel, Aerolast Tread	[Load Range Chart]																		
PN12.5	12.5" Pneumatic Wheel	[Load Range Chart]																		

\*chart indicates load rating for DNE wheel

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## SDH12 SERIES










# Steel Fabricated Rigid Caster and Wheel Assembly

## RF12 SERIES

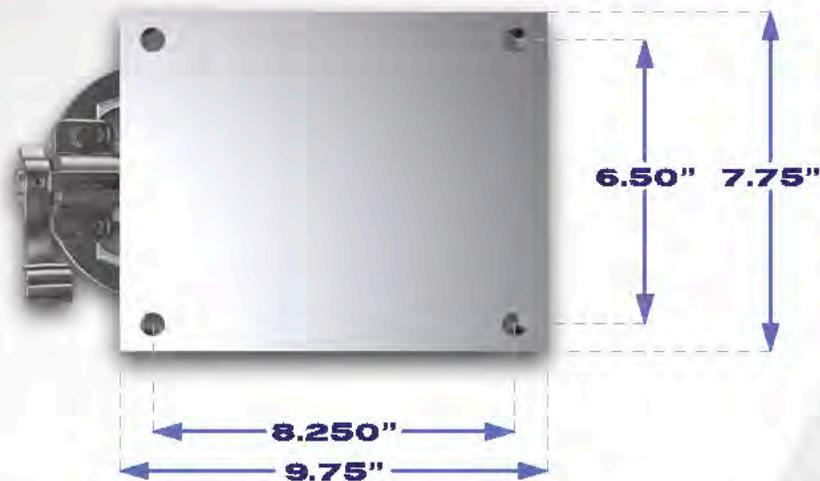

Four Mounting Holes for 1/2" Diameter Bolts.



### Brake Availability: (Proposed)

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

### EXAMPLE:

**RF12-0-XL12**



**MAX CASTER LOAD**  
RATING @ 5MPH  
12,000

CODE	DESCRIPTION	LOAD RANGE - (LBS.)																	
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000
XR10	10" Extra Heavy Duty Wheel, Rubber Tread	[Shaded cells indicating load range]																	
XL10	10" Extra Heavy Duty Wheel, Aerolast Tread	[Shaded cells indicating load range]																	
XR12	12" Extra Heavy Duty Wheel, Rubber Tread	[Shaded cells indicating load range]																	
XL12	12" Extra Heavy Duty Wheel, Aerolast Tread	[Shaded cells indicating load range]																	
PN12.5	12.5" Pneumatic Wheel	[Shaded cells indicating load range]																	
VG12	12" "V" Groove Wheel	[Shaded cells indicating load range]																	

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## RF12 SERIES

# Steel Fabricated Dual Swivel Caster and Wheel Assembly

## SDF12 SERIES



### Swivel Lock Availability:

- 0 No Swivel Lock
- 2 Ring Handle Swivel Lock

### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

\*Foot Brakes available with 12" wheels only.  
For two Brakes, use -12 or -34

### EXAMPLE:

**SDF12-2-34-XL12**

- Swivel Caster
- Dual Wheel
- Steel Fabricated
- 12" Size
- Ring Handle Swivel Lock
- 12" Dia Aerolast Tread
- Extra Heavy Duty Wheel
- Left & Right Hand Steel Pedal Foot Brake

**\* MAX CASTER LOAD**  
RATING @ 5MPH  
15,000

CODE	DESCRIPTION	LOAD RANGE - (LBS.)																	
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000
XR10	10" Extra Heavy Duty Wheel, Rubber Tread	[Load Range Chart]																	
XL10	10" Extra Heavy Duty Wheel, Aerolast Tread	[Load Range Chart]																	
XR12	12" Extra Heavy Duty Wheel, Rubber Tread	[Load Range Chart]																	
XL12	12" Extra Heavy Duty Wheel, Aerolast Tread	[Load Range Chart]																	
PN12.5	12.5" Pneumatic Wheel	[Load Range Chart]																	

\*chart indicates load rating for DNE wheel

Discover how Aerol can meet your challenges head-on with advanced mobility solutions.  
Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438


## SDF12 SERIES

# Shock Absorbing Swivel Caster and Wheel Assembly

**SS6  
SERIES**



Four Mounting Holes for 1/2" Diameter Bolts.

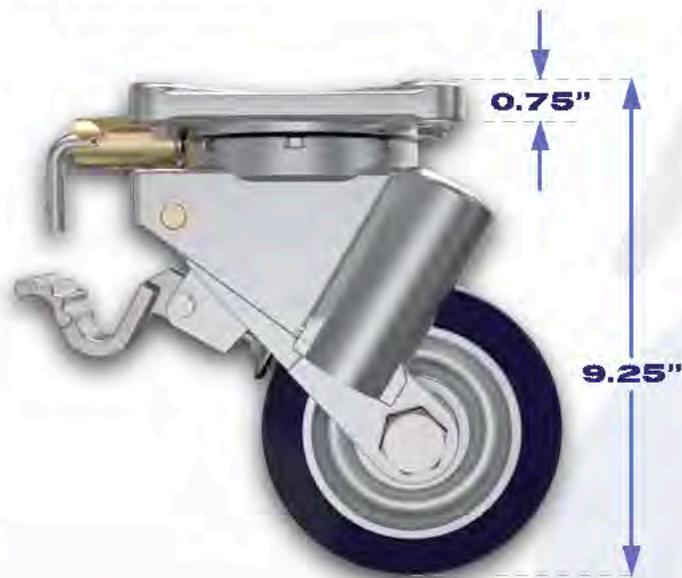

- Swivel Lock Availability:**  
 -0 No Swivel Lock  
 -1 "L" Handle Swivel Lock
- Brake Availability:**  
 -0 No Brake  
 -7 Foot Brake

**EXAMPLE:**

**SS6-1-7-EL6-500**



**Load Rating Availability**  
 Dash Number Indicates load rating to nearest 50 lbs.

CODE	DESCRIPTION	LOAD RANGE - (LBS.)																			
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
ERE	6" Aerol Wheel, Rubber Tread																				
ELE	6" Aerol Wheel, Aerolast Tread																				
SR6	6" Aero Seal Wheel, Rubber Tread																				
SL6	6" Aero Seal Wheel, Aerolast Tread																				
IRE	6" AirLite Wheel, Rubber Tread																				
ILE	6" AirLite Wheel, Aerolast Tread																				
XRE	6" Extra Heavy Duty Wheel, Rubber Tread																				
XLE	6" Extra Heavy Duty Wheel, Aerolast Tread																				
ZLE	6" Light Duty Zero Pressure Wheel																				
ZME	6" Medium Duty Zero Pressure Wheel																				
ZHE	6" Heavy Duty Zero Pressure Wheel																				
PLE	6" Plastic Wheel																				
SW6	6" '55 Series Aero Seal Wheel																				

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

**SS6  
SERIES**

# Shock Absorbing Rigid Caster and Wheel Assembly

## RS6 SERIES



Four Mounting Holes for 1/2" Diameter Bolts.




### Brake Availability:

- 0 No Brake
- 7 Foot Brake

### EXAMPLE:

**RS6-7-SR6-400**

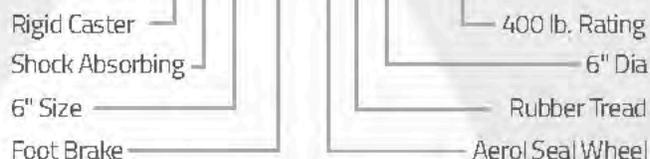

### Load Rating Availability

Dash Number Indicates load rating to nearest 50 lbs.

CODE	DESCRIPTION	LOAD RANGE - (LBS.)																			
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
ERE	6" AeroL Wheel, Rubber Tread																				
ELE	6" AeroL Wheel, Aerolast Tread																				
SR6	6" AeroSeal Wheel, Rubber Tread																				
SL6	6" AeroSeal Wheel, Aerolast Tread																				
IRE	6" AirLite Wheel, Rubber Tread																				
ILE	6" AirLite Wheel, Aerolast Tread																				
XRE	6" Extra Heavy Duty Wheel, Rubber Tread																				
XLE	6" Extra Heavy Duty Wheel, Aerolast Tread																				
ZLE	6" Light Duty Zero Pressure Wheel																				
ZME	6" Medium Duty Zero Pressure Wheel																				
ZHE	6" Heavy Duty Zero Pressure Wheel																				
PLE	6" Plastic Wheel																				
5W6	6" 55 Series AeroSeal Wheel																				

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## RS6 SERIES

# Shock Absorbing Swivel Caster and Wheel Assembly

## SS8 SERIES

Accessories


Standard Series

Heavy Duty Series

Steel Series

Shock Absorbing

Aerol Supplemental Catalog Numbering System 4-3

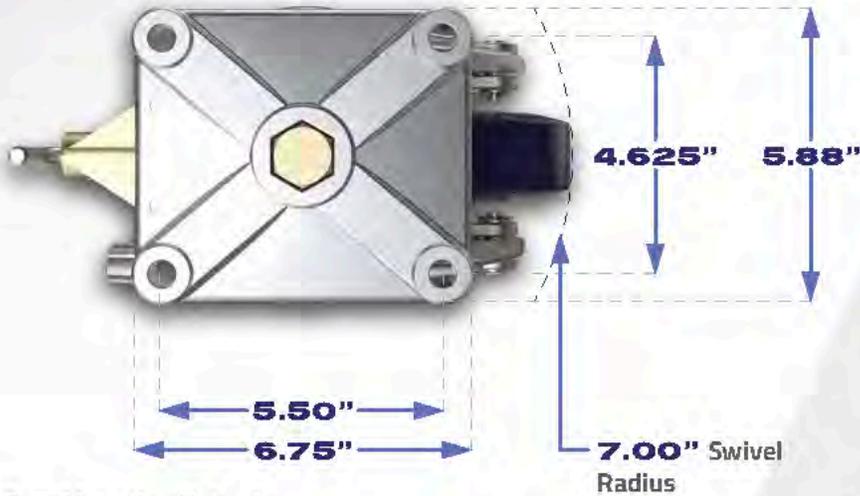

Four Mounting Holes for 1/2" Diameter Bolts.

### Swivel Lock Availability:


- 0 No Swivel Lock
- 1 "L" Handle Swivel Lock

### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

### EXAMPLE:

**SS8-0-3-PN8-300**

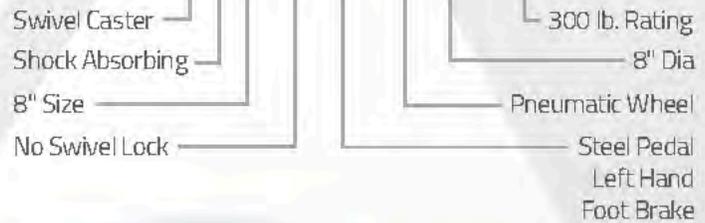

### Load Rating Availability

Dash Number Indicates load rating to nearest 50 lbs.

### Optional Base Plate Bolt Patterns:

- A: 4 1/8" x 6 1/2" for 1/2" Bolts
- B: 3 3/8" x 5 1/2" for 1/2" Bolts


CODE	DESCRIPTION	LOAD RANGE - (LBS.)																			
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
ERB	8" Aerol Wheel, Rubber Tread																				
ELB	8" Aerol Wheel, Aerolast Tread																				
SRB	8" Aerol Seal Wheel, Rubber Tread																				
SLB	8" Aerol Seal Wheel, Aerolast Tread																				
IRB	8" AirLite Wheel, Rubber Tread																				
ILB	8" AirLite Wheel, Aerolast Tread																				
PNB	8" Pneumatic Wheel																				
ZLB	8" Light Duty Zero Pressure Wheel																				
ZMB	8" Medium Duty Zero Pressure Wheel																				
ZHB	8" Heavy Duty Zero Pressure Wheel																				
PLB	8" Plastic Wheel																				
SWB	8" '55 Series Aerol Seal Wheel																				

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438


## SS8 SERIES

# Shock Absorbing Rigid Caster and Wheel Assembly

## RS8 SERIES

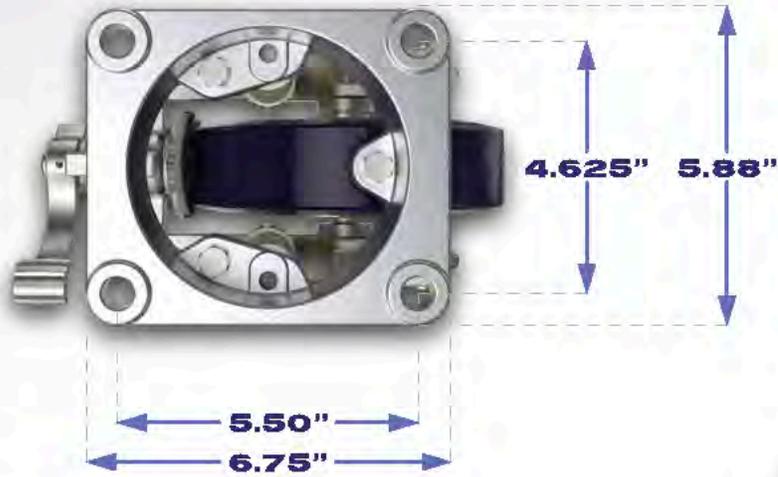

Four Mounting Holes for 1/2" Diameter Bolts.

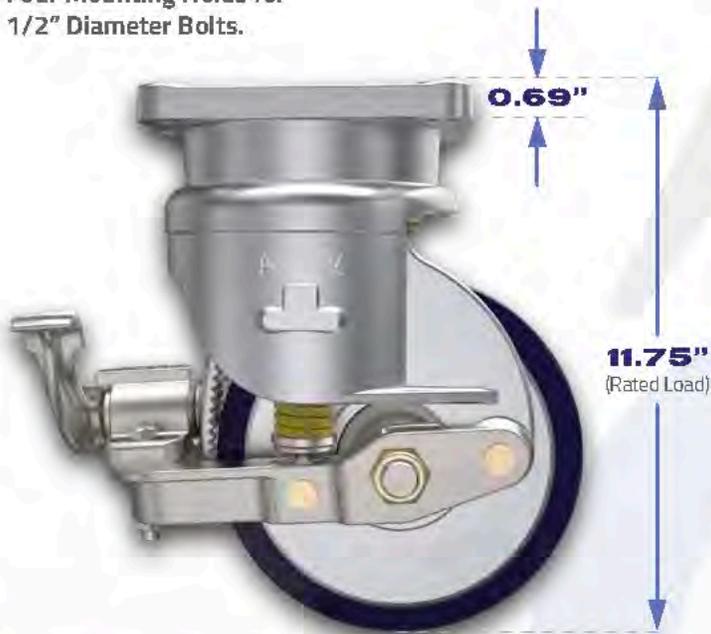


### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

### EXAMPLE:

**RS8-0-ER8-400**

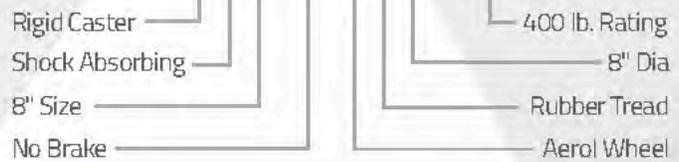

### Load Rating Availability

Dash Number Indicates load rating to nearest 50 lbs.


CODE	DESCRIPTION	LOAD RANGE - (LBS.)																			
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000
ERB	8" Aero Wheel, Rubber Tread																				
ELB	8" Aero Wheel, Aerolast Tread																				
SRB	8" Aero Seal Wheel, Rubber Tread																				
SLB	8" Aero Seal Wheel, Aerolast Tread																				
IRB	8" AirLite Wheel, Rubber Tread																				
ILB	8" AirLite Wheel, Aerolast Tread																				
PNB	8" Pneumatic Wheel																				
ZLB	8" Light Duty Zero Pressure Wheel																				
ZMB	8" Medium Duty Zero Pressure Wheel																				
ZHB	8" Heavy Duty Zero Pressure Wheel																				
PLB	8" Plastic Wheel																				
SWB	8" S5 Series Aero Seal Wheel																				

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## RS8 SERIES

# Shock Absorbing Swivel Caster and Wheel Assembly

## SS10 SERIES

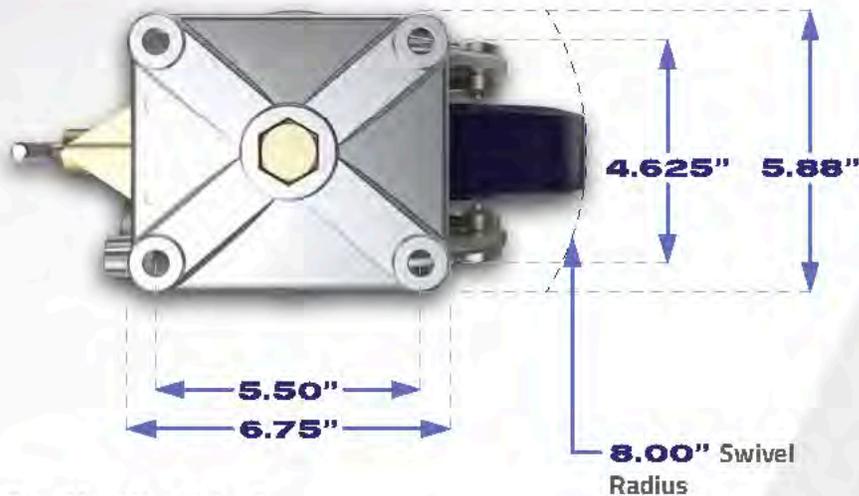

Four Mounting Holes for 1/2" Diameter Bolts.

### Swivel Lock Availability:

- 0 No Swivel Lock
- 1 "L" Handle Swivel Lock

### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

### EXAMPLE:

**SS10-1-2-ZH10-200**



### Optional Base Plate Bolt Patterns:

- A: 4 1/8 x 6 1/2 for 1/2" Bolts
- B: 3 3/4 x 5 1/4 for 1/2" Bolts

### Load Rating Availability

Dash Number indicates load rating to nearest 50 lbs.


CODE	DESCRIPTION	LOAD RANGE - (LBS.)																				
		0	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10,000	
ER10	10" Aeral Wheel, Rubber Tread																					
EL10	10" Aeral Wheel, Aeralast Tread																					
SR10	10" Aeral Seal Wheel, Rubber Tread																					
SL10	10" Aeral Seal Wheel, Aeralast Tread																					
IR10	10" AirLite Wheel, Rubber Tread																					
IL10	10" AirLite Wheel, Aeralast Tread																					
PN10	10" Pneumatic Wheel																					
ZL10	10" Light Duty Zero Pressure Wheel																					
ZM10	10" Medium Duty Zero Pressure Wheel																					
ZH10	10" Heavy Duty Zero Pressure Wheel																					

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## SS10 SERIES

# Shock Absorbing Rigid Caster and Wheel Assembly

## RSH10 SERIES

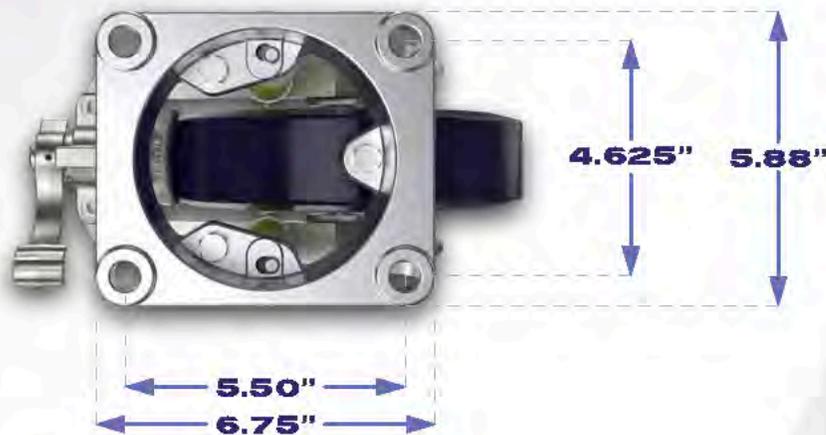

Four Mounting Holes for 1/2" Diameter Bolts.



### Brake Availability:

- 0 No Brake
- 1 Aluminum Pedal Foot Brake, Left Hand
- 2 Aluminum Pedal Foot Brake, Right Hand
- 3 Steel Pedal Foot Brake, Left Hand
- 4 Steel Pedal Foot Brake, Right Hand

### EXAMPLE:

**RS10-1PN10-200**



### Load Rating Availability

Dash Number Indicates load rating to nearest 50 lbs.

CODE	DESCRIPTION	LOAD RANGE - (LBS.)																					
		0	100	200	300	400	500	600	700	800	900	1000	1500	2000	3000	4000	5000	6000	7000	8000	9000	10,000	
ER10	10" Aerial Wheel, Rubber Tread																						
EL10	10" Aerial Wheel, Aerolast Tread																						
SR10	10" Aerial Seal Wheel, Rubber Tread																						
SL10	10" Aerial Seal Wheel, Aerolast Tread																						
IR10	10" Airlite Wheel, Rubber Tread																						
IL10	10" Airlite Wheel, Aerolast Tread																						
PN10	10" Pneumatic Wheel																						
ZL10	10" Light Duty Zero Pressure Wheel																						
ZM10	10" Medium Duty Zero Pressure Wheel																						
ZH10	10" Heavy Duty Zero Pressure Wheel																						

Discover how Aerol can meet your challenges head-on with advanced mobility solutions. Visit [www.Aerol.com](http://www.Aerol.com) or speak with a Technical Product manager, at 517-240-1438

## RSH10 SERIES













# AEROL

Accessories

Standard Series

Heavy Duty Series

Steel Series

Shock Absorbing