



**CASTER  
CONCEPTS**  
BEYOND STANDARD



# **PRODUCT CATALOG**



## WHEELS V-GROOVE

# WHEELS V-GROOVE



## FEATURES

**Bearings:** Roller, tapered, bearingless.

**Temperature:** Maximum to 800° F with proper bearing and lubrication.

**Standard:** All 1-1/2" and 2" width wheels with 3/4" roller bearings are supplied with 1/2" spanner bushing.

## APPLICATIONS

Excellent for guided industrial applications, assembly lines, paint lines and material handling where precise alignment is necessary.

## BENEFITS


V-groove wheels are constructed of premium G-3000 gray iron castings or hot forged C-1030 steel. The 90 degree grooves are accurately machined into the face of the wheels. A relief groove at the base of the "V" directs the load to each face of the angle track when in use.

V-groove wheels can be used on a track, flat surface or both without fear of damage.


Exceptionally strong and ideal for heavy loads, the V-groove wheels are able to be machined out for keyway or various bore sizes.

Wheel material codes: Cast iron (15); heavy-duty cast iron (16); forged steel (25); heavy-duty forged steel (26).

MAXIMUM CAPACITY  
**15,000** lbs.

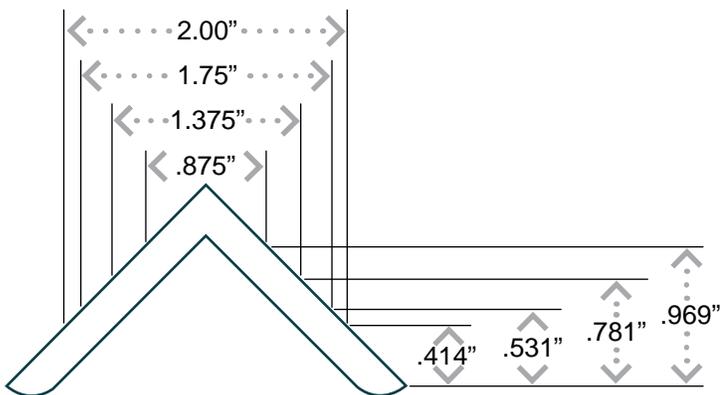

**V-GROOVE WIDTH**  
2.00" x 2.00" ANGLE IRON

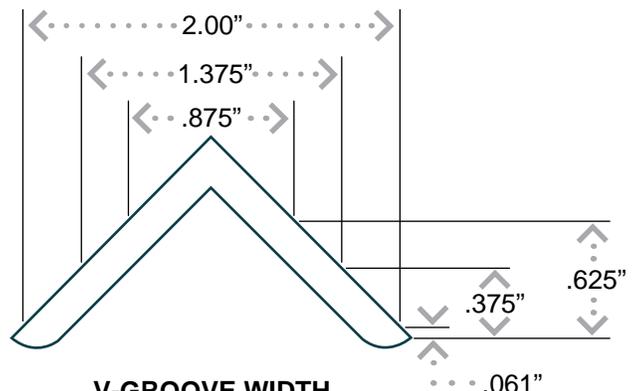

**V-GROOVE WIDTH**  
1.50" x 1.50" ANGLE IRON

# WHEELS V-GROOVE

## STRAIGHT ROLLER BEARING

Diameter	Width	Material	Capacity	Hub Length	Bore	Width x Depth	Part Number	Weight
4	2.00	Cast Iron	1,000	2 3/16	3/4	7/8 x 7/16	<a href="#">04201-15-12</a>	5.00
6	2.00	Cast Iron	1,000	2 3/16	3/4	7/8 x 7/16	<a href="#">06201-15-12</a>	5.00
6	2.50	Cast Iron	2,500	3 1/4	1	7/8 x 7/16	<a href="#">06251-15-16</a>	10.00
6	2.50	Cast Iron	2,500	3 1/4	1 1/4	7/8 x 7/16	<a href="#">06251-15-20</a>	10.00
6	3.00	Forged Steel	6,000	3 1/4	1 1/4	1-3/8 x 11/16	<a href="#">06301-25-20</a>	20.00
6	3.00	Forged Steel	6,000	3 1/4	1 1/2	1-3/8 x 11/16	<a href="#">06301-25-24</a>	20.00
8	2.50	Cast Iron	2,500	3 1/4	1	7/8 x 7/16	<a href="#">08251-15-16</a>	20.00
8	2.50	Cast Iron	2,500	3 1/4	1 1/4	7/8 x 7/16	<a href="#">08251-15-20</a>	20.00
8	3.00	Cast Iron	4,000	3 1/4	1	7/8 x 7/16	<a href="#">08301-15-16</a>	22.00
8	3.00	Cast Iron	4,000	3 1/4	1 1/4	7/8 x 7/16	<a href="#">08301-15-20</a>	22.00
8	3.00	H.D. Cast Iron	4,500	3 1/4	1 1/4	1-3/8 x 11/16	<a href="#">08301-16-20</a>	24.00
8	3.00	H.D. Cast Iron	4,500	3 1/4	1 1/2	1-3/8 x 11/16	<a href="#">08301-16-24</a>	24.00
8	3.00	Forged Steel	5,000	3 1/4	1	7/8 x 7/16	<a href="#">08301-25-16</a>	24.00
8	3.00	Forged Steel	5,000	3 1/4	1 1/4	7/8 x 7/16	<a href="#">08301-25-20</a>	24.00
8	4.00	Forged Steel	8,400	4 1/4	1 1/4	1-3/4 x 7/8	<a href="#">08401-25-20</a>	30.00
8	4.00	Forged Steel	8,400	4 1/4	1 1/2	1-3/4 x 7/8	<a href="#">08401-25-24</a>	30.00
10	3.00	Cast Iron	3,000	3 1/4	1	1-3/8 x 11/16	<a href="#">10301-15-16</a>	25.00
10	3.00	Cast Iron	3,000	3 1/4	1 1/4	1-3/8 x 11/16	<a href="#">10301-15-20</a>	25.00
10	3.00	H.D. Cast Iron	3,500	3 1/4	1 1/4	1-3/8 x 11/16	<a href="#">10301-16-20</a>	25.00
10	3.00	H.D. Cast Iron	3,500	3 1/4	1 1/2	1-3/8 x 11/16	<a href="#">10301-16-24</a>	25.00
10	3.00	Forged Steel	5,000	3 1/4	1	1-3/8 x 11/16	<a href="#">10301-25-16</a>	27.00
10	3.00	Forged Steel	5,000	3 1/4	1 1/4	1-3/8 x 11/16	<a href="#">10301-25-20</a>	27.00
10	3.00	H.D. Forged Steel	6,000	3 1/4	1 1/4	1-3/8 x 11/16	<a href="#">10301-26-20</a>	27.00
10	3.00	H.D. Forged Steel	6,000	3 1/4	1 1/2	1-3/8 x 11/16	<a href="#">10301-26-24</a>	27.00
10	4.00	Forged Steel	8,400	4 1/4	1 1/4	1-3/4 x 7/8	<a href="#">10401-25-20</a>	48.00
10	4.00	Forged Steel	8,400	4 1/4	1 1/2	1-3/4 x 7/8	<a href="#">10401-25-24</a>	48.00
12	5.00	H.D. Cast Iron	9,500	5 1/4	1 1/4	2 x 1	<a href="#">12501-16-20*</a>	110.00
12	5.00	H.D. Cast Iron	9,500	5 1/4	1 1/2	2 x 1	<a href="#">12501-16-24*</a>	110.00

Capacity listed is for manual operation.

For powered operations, consult factory.

^ Dimensions for tapered bearing bore.

\* These wheels are ductile iron.

All dimensions are in inches. All weights are in pounds.

CONTINUED

# WHEELS V-GROOVE

## PRECISION TAPERED BEARING

Diameter	Width	Material	Capacity	Hub Length	Bore	Width x Depth	Part Number	Weight
6	2.50	Cast Iron	2,500	3 1/2	3/4	7/8 x 7/16	<a href="#">06259-15-12</a>	10.00
6	3.00	Forged Steel	10,000	3 1/2	1	1-3/8 x 11/16	<a href="#">06309-25-16</a>	20.00
6	3.00	Forged Steel	10,000	3 1/2	1 1/4	1-3/8 x 11/16	<a href="#">06309-25-20</a>	20.00
6	3.00	H.D. Forged Steel	15,000	3 1/2	1 1/4	1-3/8 x 11/16	<a href="#">06309-26-20</a>	20.00
6	3.00	H.D. Forged Steel	15,000	3 1/2	1 1/2	1-3/8 x 11/16	<a href="#">06309-26-24</a>	20.00
8	2.50	Cast Iron	2,500	3 1/2	3/4	7/8 x 7/16	<a href="#">08259-15-12</a>	20.00
8	3.00	Cast Iron	4,000	3 1/2	1	7/8 x 7/16	<a href="#">08309-15-16</a>	22.00
8	3.00	Cast Iron	4,000	3 1/2	1 1/4	7/8 x 7/16	<a href="#">08309-15-20</a>	22.00
8	3.00	H.D. Cast Iron	4,500	3 1/2	1	1-3/8 x 11/16	<a href="#">08309-16-16</a>	24.00
8	3.00	H.D. Cast Iron	4,500	3 1/2	1 1/4	1-3/8 x 11/16	<a href="#">08309-16-20</a>	24.00
8	3.00	Forged Steel	5,000	3 1/2	3/4	7/8 x 7/16	<a href="#">08309-25-12</a>	24.00
8	3.00	Forged Steel	5,000	3 1/2	1	7/8 x 7/16	<a href="#">08309-25-16</a>	24.00
8	4.00	Forged Steel	10,000	4 1/2	1	1-3/4 x 7/8	<a href="#">08409-25-16</a>	30.00
8	4.00	Forged Steel	10,000	4 1/2	1 1/4	1-3/4 x 7/8	<a href="#">08409-25-20</a>	30.00
8	4.00	H.D. Forged Steel	15,000	4 1/2	1 1/4	1-3/4 x 7/8	<a href="#">08409-26-20</a>	31.00
8	4.00	H.D. Forged Steel	15,000	4 1/2	1 1/2	1-3/4 x 7/8	<a href="#">08409-26-24</a>	31.00
10	3.00	Cast Iron	3,000	3 1/2	3/4	1-3/8 x 11/16	<a href="#">10309-15-12</a>	25.00
10	3.00	H.D. Cast Iron	3,500	3 1/2	1	1-3/8 x 11/16	<a href="#">10309-16-16</a>	25.00
10	3.00	H.D. Cast Iron	3,500	3 1/2	1 1/4	1-3/8 x 11/16	<a href="#">10309-16-20</a>	25.00
10	3.00	Forged Steel	5,000	3 1/2	3/4	1-3/8 x 11/16	<a href="#">10309-25-12</a>	27.00
10	3.00	Forged Steel	5,000	3 1/2	1	1-3/8 x 11/16	<a href="#">10309-25-16</a>	27.00
10	3.00	H.D. Forged Steel	6,000	3 1/2	1	1-3/8 x 11/16	<a href="#">10309-26-16</a>	27.00
10	3.00	H.D. Forged Steel	6,000	3 1/2	1 1/4	1-3/8 x 11/16	<a href="#">10309-26-20</a>	27.00
10	4.00	Forged Steel	10,000	4 1/2	1	1-3/4 x 7/8	<a href="#">10409-25-16</a>	48.00
10	4.00	Forged Steel	10,000	4 1/2	1 1/4	1-3/4 x 7/8	<a href="#">10409-25-20</a>	48.00
10	4.00	H.D. Forged Steel	15,000	4 1/2	1 1/4	1-3/4 x 7/8	<a href="#">10409-26-20</a>	48.00
10	4.00	H.D. Forged Steel	15,000	4 1/2	1 1/2	1-3/4 x 7/8	<a href="#">10409-26-24</a>	48.00
12	5.00	H.D. Cast Iron	12,000	5 1/2	1 1/4	2 x 1	<a href="#">12509-16-20*</a>	110.00
12	5.00	H.D. Cast Iron	12,000	5 1/2	1 1/2	2 x 1	<a href="#">12509-16-24*</a>	110.00

CONTINUED

# WHEELS V-GROOVE

## BEARINGLESS

Diameter	Width	Material	Capacity	Hub Length	Bore	Width x Depth	Part Number	Weight
4	2.00	Cast Iron	1,000	2 3/16	1 3/16	7/8 x 7/16	<a href="#">04200-15-19</a>	5.00
6	2.00	Cast Iron	1,000	2 3/16	1 3/16	7/8 x 7/16	<a href="#">06200-15-19</a>	5.00
6	2.50	Cast Iron	2,500	3 1/4	1 15/16	7/8 x 7/16	<a href="#">06250-15-31</a>	10.00
6	3.00	Forged Steel	15,000	3 1/4	2 7/16	1-3/8 x 11/16	<a href="#">06300-25-39</a>	20.00
6	3.00	H.D. Forged Steel	15,000	3 1/4	3 1/8^	1-3/8 x 11/16	<a href="#">06308-26-50</a>	20.00
8	2.50	Cast Iron	2,500	3 1/4	1 15/16	7/8 x 7/16	<a href="#">08250-15-31</a>	20.00
8	3.00	Cast Iron	4,000	3 1/4	1 15/16	7/8 x 7/16	<a href="#">08300-15-31</a>	22.00
8	3.00	H.D. Cast Iron	4,500	3 1/4	2 7/16	1-3/8 x 11/16	<a href="#">08300-16-39</a>	24.00
8	3.00	Forged Steel	5,000	3 1/4	1 15/16	7/8 x 7/16	<a href="#">08300-25-31</a>	24.00
8	4.00	Forged Steel	8,400	4 1/4	2 7/16	1-3/4 x 7/8	<a href="#">08400-25-39</a>	30.00
8	4.00	H.D. Forged Steel	15,000	4 1/4	3 1/8^	1-3/4 x 7/8	<a href="#">08408-26-50</a>	31.00
10	3.00	Cast Iron	3,000	3 1/4	1 15/16	1-3/8 x 11/16	<a href="#">10300-15-31</a>	25.00
10	3.00	H.D. Cast Iron	3,500	3 1/4	2 7/16	1-3/8 x 11/16	<a href="#">10300-16-39</a>	25.00
10	3.00	Forged Steel	5,000	3 1/4	1 15/16	1-3/8 x 11/16	<a href="#">10300-25-31</a>	27.00
10	3.00	H.D. Forged Steel	6,000	3 1/4	2 7/16	1-3/8 x 11/16	<a href="#">10300-26-39</a>	27.00
10	4.00	Forged Steel	8,400	4 1/4	2 7/16	1-3/4 x 7/8	<a href="#">10400-25-39</a>	48.00
10	4.00	H.D. Forged Steel	15,000	4 1/4	3 1/8^	1-3/4 x 7/8	<a href="#">10408-26-50</a>	48.00

Capacity listed is for manual operation.

For powered operations, consult factory.

^ Dimensions for tapered bearing bore.

\* These wheels are ductile iron.

All dimensions are in inches. All weights are in pounds.

# WHEELS FLANGED



## FEATURES

**Bearings:** Roller, tapered, and bearingless.

**Temperature:** Maximum to 800°F with proper bearing and lubrication.

**Standard:** All 1-1/2" and 2" width wheels with 3/4" roller bearings are supplied with 1/2" spanner bushing.

## APPLICATIONS

Flanged wheels are excellent for precise alignment of work, captive turntables or repetitive processes, including foundry cooling lines.

## BENEFITS


The flanged wheel is designed to operate on steel tracking to minimize guidance and rolling effort. These wheels are constructed of premium cast iron and steel for high strength and long wear.

Various bore sizes are available for use with keyway or a variety of bearings.

MAXIMUM CAPACITY

**12,000** lbs.

## FLANGED RAIL DIMENSIONS

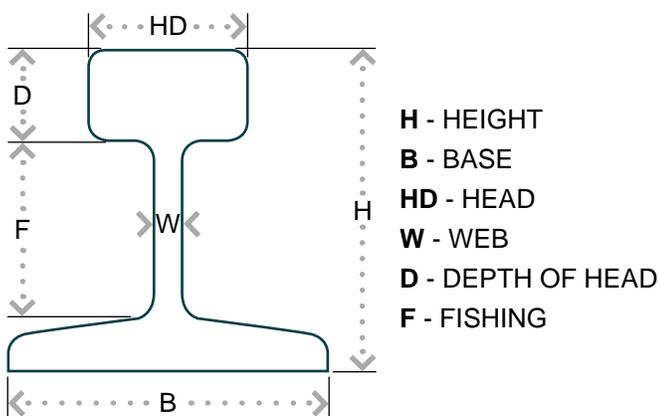


## RAIL SIZES

Weight (LB/FT)	H	B	HD	W	D	F
12	2	2	1	3/16	9/16	1-1/32
16	2-3/8	2-3/8	1-11/64	7/32	41/64	1-23/64
20	2-5/8	2-5/8	1-11/32	1/4	23/32	1-15/32
25	2-3/4	2-3/4	1-1/2	19/64	25/32	1-31/64
30	3-1/8	3-1/8	1-11/16	21/64	7/8	1-23/32
40	3-1/2	3-1/2	1-7/8	25/64	1-1/64	1-55/64
60	4-1/4	4-1/4	2-3/8	31/64	1-7/32	2-17/64
80	5	5	2-1/2	35/64	1-1/2	2-5/8
85	5-3/16	5-3/16	2-9/16	9/16	1-35/64	2-3/4
90	5-5/8	5-1/8	2-9/16	9/16	1-15/32	3-5/32
100	6	5-3/8	2-11/16	9/16	1-21/32	3-9/32

# WHEELS FLANGED

## STRAIGHT ROLLER BEARING (SINGLE FLANGED)

Dia. A	Width B	Dia. C	Width D	Material	Capacity	Hub Length E	Bore F	Hub Dia. G	Part Number	Weight
3.50	1.31	4.50	1.69	Cast Iron	1,000	1 15/16	3/4	2 1/8	<a href="#">03101-18-12</a>	5.00
4.50	2.25	5.50	3.00	Cast Iron	4,000	3 1/4	1	3 3/4	<a href="#">04251-18-16</a>	15.00
4.50	2.25	5.50	3.00	Cast Iron	4,000	3 1/4	1 1/4	3 3/4	<a href="#">04251-18-20</a>	15.00
5.00	2.06	6.00	2.69	Forged Steel	6,000	3 1/4	1 1/4	3 7/8	<a href="#">05201-28-20</a>	15.00
5.00	2.06	6.00	2.69	Forged Steel	6,000	3 1/4	1 1/2	3 7/8	<a href="#">05201-28-24</a>	15.00
6.00	1.63	6.75	2.00	Cast Iron	900	2 3/16	3/4	1 3/4	<a href="#">06151-18-12</a>	18.00
6.00	2.00	7.00	2.75	Cast Iron	3,500	3 1/4	1	3	<a href="#">06251-18-16</a>	20.50
6.00	2.00	7.00	2.75	Cast Iron	3,500	3 1/4	1 1/4	3	<a href="#">06251-18-20</a>	20.50
6.13	1.69	7.00	2.13	Cast Iron	4,000	2 3/4	1 1/4	3	<a href="#">06201-18-20</a>	24.00
7.87	2.25	9.25	2.75	Cast Iron	3,500	3 1/4	1 1/4	3 3/4	<a href="#">07251-18-20</a>	29.00
7.87	2.25	9.25	2.75	Cast Iron	3,500	3 1/4	1 1/2	3 3/4	<a href="#">07251-18-24</a>	29.00
7.87	1.75	8.63	2.25	Cast Iron	3,000	2 1/2	3/4	2 7/8	<a href="#">08201-18-12</a>	27.00
7.87	1.75	8.63	2.25	Cast Iron	3,000	2 1/2	1	2 7/8	<a href="#">08201-18-16</a>	27.00
7.87	1.75	8.63	2.25	Cast Iron	3,000	2 1/2	1 1/4	2 7/8	<a href="#">08201-18-20</a>	27.00
8.00	2.38	9.00	3.00	Forged Steel	6,000	3 1/4	1 1/4	5	<a href="#">08201-28-20</a>	48.00
8.00	2.38	9.00	3.00	Forged Steel	6,000	3 1/4	1 1/2	5	<a href="#">08201-28-24</a>	48.00
8.00	2.25	9.50	3.00	Cast Iron	3,500	3 1/4	1 1/4	3 3/4	<a href="#">08251-18-20</a>	33.00
8.00	2.20	9.50	3.00	Cast Iron	3,500	3 1/4	1 1/2	3 3/4	<a href="#">08251-18-24</a>	33.00
14.88	2.56	16.88	3.38	Cast Iron	8,000	4 1/4	1 1/4	4 1/2	<a href="#">15251-18-20</a>	100.00
14.88	2.56	16.88	3.38	Cast Iron	8,000	4 1/4	1 1/2	4 1/2	<a href="#">15251-18-24</a>	100.00

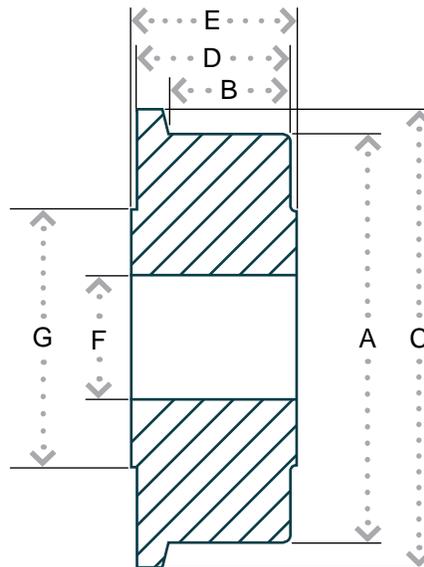


CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS FLANGED

## PRECISION TAPERED BEARING (SINGLE FLANGED)

Dia. A	Width B	Dia. C	Width D	Material	Capacity	Hub Length E	Bore F	Hub Dia. G	Part Number	Weight
4.00	2.00	5.25	3.00	Cast Iron	5,000	3 1/2	1	2 1/2	<a href="#">04209-18-16</a>	10.00
4.50	2.25	5.50	3.00	Cast Iron	5,000	3 1/2	1	3 3/4	<a href="#">04259-18-16</a>	15.00
4.50	2.25	5.50	3.00	Cast Iron	5,000	3 1/2	1 1/4	3 3/4	<a href="#">04259-18-20</a>	15.00
5.00	2.06	6.00	2.69	Forged Steel	10,000	3 1/2	1	3 7/8	<a href="#">05209-28-16</a>	15.00
5.00	2.06	6.00	2.69	Forged Steel	10,000	3 1/2	1 1/4	3 7/8	<a href="#">05209-28-20</a>	15.00
6.13	1.69	7.00	2.13	Cast Iron	5,000	3	3/4	3	<a href="#">06209-18-12</a>	24.00
6.13	1.69	7.00	2.13	Cast Iron	5,000	3	1	3	<a href="#">06209-18-16</a>	24.00
6.00	2.00	7.00	2.75	Cast Iron	3,500	3 1/2	3/4	3	<a href="#">06259-18-12</a>	20.50
6.00	2.00	7.00	2.75	Cast Iron	3,500	3 1/2	1	3	<a href="#">06259-18-16</a>	20.50
7.87	2.25	9.25	2.75	Cast Iron	3,500	3 1/2	1	3 3/4	<a href="#">07259-18-16</a>	29.00
7.87	2.25	9.25	2.75	Cast Iron	3,500	3 1/2	1 1/4	3 3/4	<a href="#">07259-18-20</a>	29.00
7.87	1.75	8.63	2.25	Cast Iron	3,000	2 3/4	3/4	2 7/8	<a href="#">08209-18-12</a>	27.00
8.00	2.38	9.00	3.00	Forged Steel	10,000	3 1/2	1	5	<a href="#">08209-28-16</a>	48.00
8.00	2.38	9.00	3.00	Forged Steel	10,000	3 1/2	1 1/4	5	<a href="#">08209-28-20</a>	48.00
8.00	2.25	9.50	3.00	Cast Iron	3,500	3 1/2	1	3 3/4	<a href="#">08259-18-16</a>	33.00
8.00	2.25	9.50	3.00	Cast Iron	3,500	3 1/2	1 1/4	3 3/4	<a href="#">08259-18-20</a>	33.00
10.00	4.00	12.00	5.00	Cast Iron	12,000	6 1/4	1 1/4	4 1/2	<a href="#">10409-18-20</a>	90.00
10.00	4.00	12.00	5.00	Cast Iron	12,000	6 1/4	1 1/2	4 1/2	<a href="#">10409-18-24</a>	90.00
14.88	2.56	16.88	3.38	Cast Iron	8,000	4 1/2	1	4 1/2	<a href="#">15259-18-16</a>	100.00
14.88	2.56	16.88	3.38	Cast Iron	8,000	4 1/2	1 1/4	4 1/2	<a href="#">15259-18-20</a>	100.00

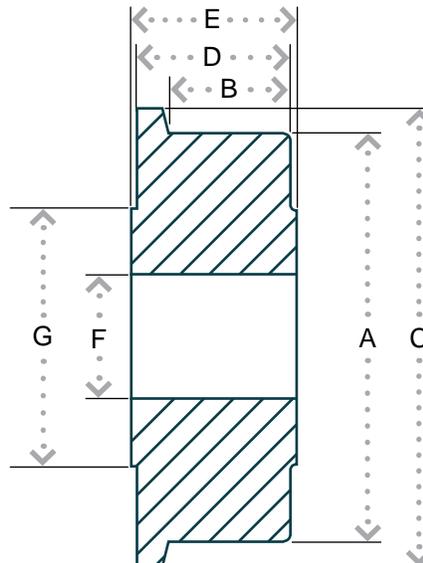


CONTINUED

# WHEELS FLANGED

## BEARINGLESS (SINGLE FLANGED)

Dia. A	Width B	Dia. C	Width D	Material	Capacity	Hub Length E	Bore F	Hub Dia. G	Part Number	Weight
3.50	1.31	4.50	1.69	Cast Iron	1,000	1 15/16	1 3/16	2 1/8	<a href="#">03100-18-19</a>	5.00
4.50	2.25	5.50	3.00	Cast Iron	5,000	3 1/4	2 7/16	2 1/2	<a href="#">04258-18-39</a>	15.00
4.50	2.25	5.50	3.00	Cast Iron	5,000	3 1/4	1 15/16	3 3/4	<a href="#">04250-18-31</a>	15.00
5.00	2.06	6.00	2.69	Forged Steel	10,000	3 1/4	2 7/16	3 7/8	<a href="#">05208-28-39</a>	15.00
6.00	1.63	6.75	2.00	Cast Iron	900	2 3/16	1 3/16	1 3/4	<a href="#">06150-18-19</a>	18.00
6.00	2.00	7.00	2.75	Cast Iron	3,500	3 1/4	1 15/16	3	<a href="#">06250-18-31</a>	20.50
6.13	1.69	7.00	2.13	Cast Iron	5,000	2 3/4	1 15/16	3	<a href="#">06200-18-31</a>	24.00
7.87	2.25	9.25	2.75	Cast Iron	3,500	3 1/4	2 7/16	3 3/4	<a href="#">07250-18-39</a>	29.00
7.87	1.75	8.63	2.25	Cast Iron	3,000	2 1/2	1 3/16	2 7/8	<a href="#">08200-18-19</a>	27.00
7.87	1.75	8.63	2.25	Cast Iron	3,000	2 1/2	1 15/16	2 7/8	<a href="#">08200-18-31</a>	27.00
8.00	2.38	9.00	3.00	Forged Steel	15,000	3 1/4	2 7/16	5	<a href="#">08200-28-39</a>	48.00
8.00	2.25	9.50	3.00	Cast Iron	3,500	3 1/4	2 7/16	3 3/4	<a href="#">08250-18-39</a>	33.00
10.00	4.00	12.00	5.00	Cast Iron	12,000	6	3 1/8	4 1/2	<a href="#">10408-18-50</a>	90.00
14.88	2.56	16.88	3.38	Cast Iron	8,000	4 1/4	2 7/16	4 1/2	<a href="#">15250-18-39</a>	100.00

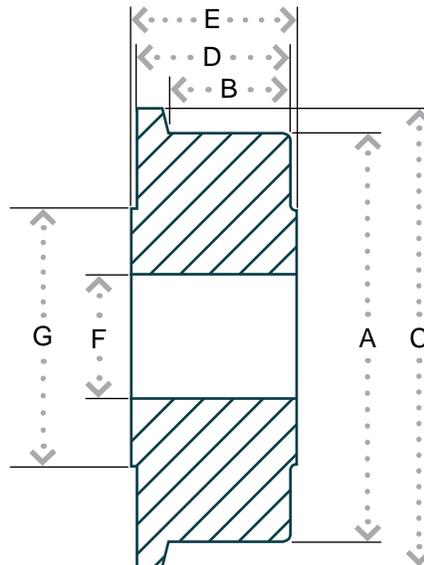

CONTINUED

All dimensions are in inches. All weights are in pounds.


# WHEELS FLANGED

## STRAIGHT ROLLER BEARING (DUAL FLANGED)

Dia. A	Width B	Dia. C	Width D	Material	Capacity	Hub Length E	Bore F	Hub Dia. G	Part Number	Weight
5.00	1.69	6.00	3.00	Forged Steel	6,000	3 1/4	1 1/4	3 7/8	<a href="#">05201-29-20</a>	17.00
5.00	1.69	6.00	3.00	Forged Steel	6,000	3 1/4	1 1/2	3 7/8	<a href="#">05201-29-24</a>	17.00
6.00	2.13	7.25	3.00	Cast Iron	5,000	3 1/4	1	3	<a href="#">06201-19-16</a>	26.00
6.00	2.13	7.25	3.00	Cast Iron	5,000	3 1/4	1 1/4	3	<a href="#">06201-19-20</a>	26.00
8.00	1.76	9.00	3.00	Forged Steel	6,000	3 1/4	1 1/4	5	<a href="#">08201-29-20</a>	50.00
8.00	1.76	9.00	3.00	Forged Steel	6,000	3 1/4	1 1/2	5	<a href="#">08201-29-24</a>	50.00

## PRECISION TAPERED BEARING (DUAL FLANGED)

Dia. A	Width B	Dia. C	Width D	Material	Capacity	Hub Length E	Bore F	Hub Dia. G	Part Number	Weight
5.00	1.69	6.00	3.00	Forged Steel	10,000	3 1/2	1	3 7/8	<a href="#">05209-29-16</a>	17.00
5.00	1.69	6.00	3.00	Forged Steel	10,000	3 1/2	1 1/4	3 7/8	<a href="#">05209-29-20</a>	17.00
6.00	2.13	7.25	3.00	Cast Iron	5,000	3 1/2	3/4	3	<a href="#">06209-19-12</a>	26.00
6.00	2.13	7.25	3.00	Cast Iron	6,000	3 1/2	1	3	<a href="#">06209-19-16</a>	26.00
8.00	1.76	9.00	3.00	Forged Steel	10,000	3 1/2	1	5	<a href="#">08209-29-16</a>	50.00
8.00	1.76	9.00	3.00	Forged Steel	10,000	3 1/2	1 1/4	5	<a href="#">08209-29-20</a>	50.00
10.00	3.00	12.00	5.00	Cast Iron	12,000	6 1/4	1 1/4	4 1/2	<a href="#">10309-19-20</a>	95.00
10.00	3.00	12.00	5.00	Cast Iron	12,000	6 1/4	1 1/2	4 1/2	<a href="#">10309-19-24</a>	95.00

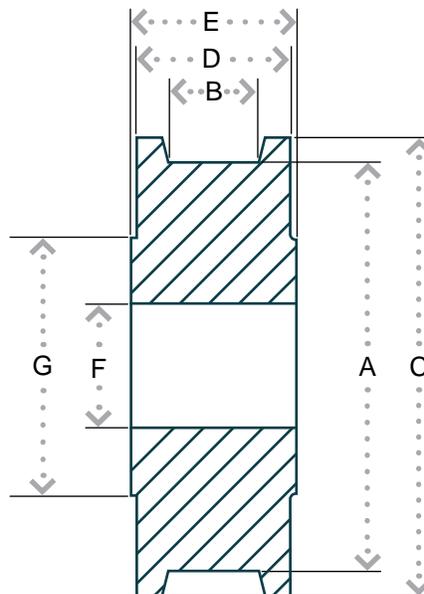


CONTINUED

# WHEELS FLANGED

## BEARINGLESS (DUAL FLANGED)

Dia. A	Width B	Dia. C	Width D	Material	Capacity	Hub Length E	Bore F	Hub Dia. G	Part Number	Weight
5.00	1.69	6.00	3.00	Forged Steel	10,000	3 1/4	2 7/16	3 7/8	<a href="#">05200-29-39</a>	17.00
6.00	2.13	7.25	3.00	Cast Iron	6,000	3 1/4	1 15/16	3	<a href="#">06200-19-31</a>	26.00
8.00	1.76	9.00	3.00	Forged Steel	15,000	3 1/4	2 7/16	5	<a href="#">08200-29-39</a>	50.00
8.00	1.76	9.00	3.00	Forged Steel	15,000	3 1/4	2 7/16	5	<a href="#">08208-29-39</a>	50.00
10.00	3.00	12.00	5.00	Cast Iron	12,000	6	3 1/8	4 1/2	<a href="#">10308-19-50</a>	95.00

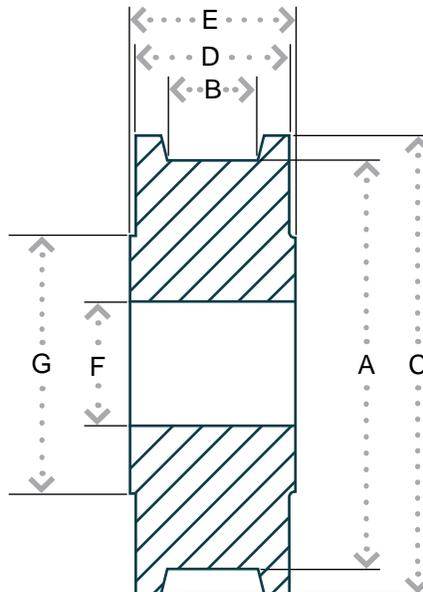

All dimensions are in inches. All weights are in pounds.

# WHEELS FORGED STEEL



MAXIMUM CAPACITY

**20,000** lbs.

## FEATURES

**Bearings:** Roller, tapered, bearingless, teflon.

**Temperature:** Maximum to 800 degrees with proper bearings and lubrication.

**Standard:** All 1-1/2" and 2" wide wheels are supplied with 1/2" spanner standard.

## BENEFITS

Forged steel wheels are hot forged from high carbon steel billets heated to 2,400 degrees Fahrenheit then repeatedly hit by high tonnage forging hammers. This process enhances the grain structure and increases the ductility and tensile strength (64,000 psi) of the wheel. The wheels are then precision machined flat with rounded edges to finished tolerances.

Forged steel wheels offer the greatest load capacity, impact strength and rollability of all caster wheels.

Wheel material codes: forged steel (20); heavy-duty forged steel (21); ductile iron (12).

# WHEELS FORGED STEEL

## STRAIGHT ROLLER BEARING

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	1.50	1,400	2 3/16	3/4	<a href="#">04101-20-12</a>	3.25
5	1.75	1,500	2 3/16	3/4	<a href="#">05201-20-12</a>	5.25
6	2.00	1,500	2 3/16	3/4	<a href="#">06201-20-12</a>	6.25
6	2.50	4,000	3 1/4	1 1/4	<a href="#">06251-20-20</a>	12.00
6	2.50	4,000	3 1/4	1	<a href="#">06251-20-16</a>	12.00
6	3.00	6,000	3 1/4	1 1/4	<a href="#">06301-20-20</a>	20.00
6	3.00	6,000	3 1/4	1 1/2	<a href="#">06301-20-24</a>	20.00
8	2.50	4,000	3 1/4	1	<a href="#">08251-20-16</a>	12.00
8	2.50	4,000	3 1/4	1 1/4	<a href="#">08251-20-20</a>	12.00
8	3.00	4,500	3 1/4	1	<a href="#">08301-20-16</a>	18.50
8	3.00	4,500	3 1/4	1 1/4	<a href="#">08301-20-20</a>	18.50
8	4.00	8,400	4 1/4	1 1/4	<a href="#">08401-20-20</a>	37.00
8	4.00	8,400	4 1/4	1 1/2	<a href="#">08401-20-24</a>	37.00
10	3.00	5,000	3 1/4	1	<a href="#">10301-20-16</a>	28.00
10	3.00	5,000	3 1/4	1 1/4	<a href="#">10301-20-20</a>	28.00
10	3.00	6,000	3 1/4	1 1/4	<a href="#">10301-21-20</a>	28.00
10	3.00	6,000	3 1/4	1 1/2	<a href="#">10301-21-24</a>	28.00
10	4.00	8,400	4 1/4	1 1/4	<a href="#">10401-20-20</a>	48.00
10	4.00	8,400	4 1/4	1 1/2	<a href="#">10401-20-24</a>	48.00
12	4.00	7,500	4 1/4	1 1/4	<a href="#">12401-12-20*</a>	53.00
12	4.00	7,500	4 1/4	1 1/2	<a href="#">12401-12-24*</a>	53.00
12	5.00	10,000	5 1/4	1 1/4	<a href="#">12501-12-20*</a>	98.00
12	5.00	10,000	5 1/4	1 1/2	<a href="#">12401-12-24*</a>	98.00

^ Dimensions for tapered bearing bore.

\* These wheels are cast ductile iron.

All dimensions are in inches. All weights are in pounds.

CONTINUED

# WHEELS FORGED STEEL

## PRECISION TAPERED BEARING

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	1.50	1,400	2 7/16	1/2	<a href="#">04109-20-08</a>	3.25
5	1.75	1,800	2 7/16	1/2	<a href="#">05209-20-08</a>	5.25
6	2.00	2,500	2 7/16	1/2	<a href="#">06209-20-08</a>	6.25
6	2.50	5,000	3 1/2	3/4	<a href="#">06259-20-12</a>	12.00
6	2.50	5,000	3 1/2	1	<a href="#">06259-20-16</a>	12.00
6	3.00	10,000	3 1/2	1 1/4	<a href="#">06309-20-20</a>	21.00
6	3.00	10,000	3 1/2	1	<a href="#">06309-20-16</a>	21.00
6	3.00	17,000	3 1/2	1 1/4	<a href="#">06309-21-20</a>	22.00
6	3.00	17,000	3 1/2	1 1/2	<a href="#">06309-21-24</a>	22.00
8	2.50	5,000	3 1/2	3/4	<a href="#">08259-20-12</a>	12.00
8	3.00	5,500	3 1/2	3/4	<a href="#">08309-20-12</a>	18.50
8	3.00	5,500	3 1/2	1	<a href="#">08309-20-16</a>	18.50
8	4.00	10,000	4 1/2	1	<a href="#">08409-20-16</a>	37.00
8	4.00	10,000	4 1/2	1 1/4	<a href="#">08409-20-20</a>	37.00
8	4.00	20,000	4 1/2	1 1/4	<a href="#">08409-21-20</a>	37.00
8	4.00	20,000	4 1/2	1 1/2	<a href="#">08409-21-24</a>	37.00
10	3.00	6,000	3 1/2	3/4	<a href="#">10309-20-12</a>	28.00
10	3.00	6,000	3 1/2	1	<a href="#">10309-20-16</a>	28.00
10	3.00	6,500	3 1/2	1	<a href="#">10309-21-16</a>	28.00
10	3.00	6,500	3 1/2	1 1/4	<a href="#">10309-21-20</a>	28.00
10	4.00	10,000	4 1/2	1	<a href="#">10409-20-16</a>	48.00
10	4.00	10,000	4 1/2	1 1/4	<a href="#">10409-20-20</a>	48.00
10	4.00	20,000	4 1/2	1 1/4	<a href="#">10409-21-20</a>	48.00
10	4.00	20,000	4 1/2	1 1/2	<a href="#">10409-21-24</a>	48.00
12	4.00	7,500	4 1/2	1	<a href="#">12409-12-16*</a>	53.00
12	4.00	7,500	4 1/2	1 1/4	<a href="#">12409-12-20*</a>	53.00
12	5.00	10,000	5 1/2	1 1/4	<a href="#">12509-12-20*</a>	98.00
12	5.00	10,000	5 1/2	1 1/2	<a href="#">12509-12-24*</a>	98.00

CONTINUED

# WHEELS FORGED STEEL

BEARINGLESS						
Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	1.50	1,400	2 3/16	1 3/16	<a href="#">04100-20-19</a>	3.25
5	1.75	1,500	2 3/16	1 3/16	<a href="#">05200-20-19</a>	5.25
6	2.00	1,500	2 3/16	1 3/16	<a href="#">06200-20-19</a>	6.25
6	2.50	4,000	3 1/4	1 15/16	<a href="#">06250-20-31</a>	12.00
6	3.00	6,000	3 1/4	2 7/16	<a href="#">06300-20-39</a>	20.00
6	3.00	17,000	3 1/4	3 1/8^	<a href="#">06308-21-50</a>	22.00
8	2.50	4,000	3 1/4	1 15/16	<a href="#">08250-20-31</a>	12.00
8	3.00	4,500	3 1/4	1 15/16	<a href="#">08300-20-31</a>	18.50
8	4.00	8,400	4 1/4	2 7/16	<a href="#">08400-20-39</a>	37.00
8	4.00	20,000	4 1/4	3 1/8^	<a href="#">08408-21-50^</a>	37.00
10	3.00	5,000	3 1/4	1 15/16	<a href="#">10300-20-31</a>	28.00
10	3.00	6,000	3 1/4	2 7/16	<a href="#">10300-21-39</a>	28.00
10	4.00	8,400	4 1/4	2 7/16	<a href="#">10400-20-39</a>	48.00
10	4.00	20,000	4 1/4	3 1/8^	<a href="#">10408-21-50</a>	48.00
12	4.00	7,500	4 1/4	2 7/16	<a href="#">12400-12-39*</a>	53.00

^ Dimensions for tapered bearing bore.

\* These wheels are cast ductile iron.

All dimensions are in inches. All weights are in pounds.

# WHEELS CAST IRON



MAXIMUM CAPACITY

**15,000** lbs.

## FEATURES

**Standard:** All 1-1/2" and 2" wide wheels with 3/4" roller bearings are supplied with 1/2" spanner standard.

## BENEFITS

These cast iron wheels are constructed of premium Class 30 gray iron for maximum load capacity and impact strength. The wheels feature heavy cross section castings for heavy duty use, abrasion resistance and a long service life. Each wheel is precision machined with rounded edges to finished tolerances.

Built for high capacity applications, the cast iron wheels can withstand extreme heat. Precision tapered bearings are available to complement the characteristics of the wheels.

Wheel material codes: cast iron (10); heavy-duty cast iron (11); ductile iron (12).

# WHEELS CAST IRON

## STRAIGHT ROLLER BEARING

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
3.25	1.50	400	1 5/8	3/4	<a href="#">03151-10-12</a>	3.40
3.25	1.50	400	1 5/8	5/8	<a href="#">03151-10-10</a>	3.40
3.25	2.00	700	2 3/16	3/4	<a href="#">03201-10-12</a>	3.40
4	1.50	600	1 5/8	5/8	<a href="#">04151-10-10</a>	3.40
4	2.00	1,000	2 3/16	3/4	<a href="#">04201-10-12</a>	4.00
4	3.00	2,000	3 1/4	1	<a href="#">04301-10-16</a>	7.00
4	3.00	2,000	3 1/4	1 1/4	<a href="#">04301-10-20</a>	7.00
4	4.00	4,000	4 1/4	1 1/4	<a href="#">04401-10-20</a>	11.00
5	1.50	600	1 5/8	3/4	<a href="#">05151-10-12</a>	
5	1.50	600	1 5/8	5/8	<a href="#">05151-10-10</a>	
5	2.00	1,200	2 3/16	3/4	<a href="#">05201-10-12</a>	6.00
5	2.00	1,200	2 3/16	5/8	<a href="#">05201-10-10</a>	
5	2.50	2,000	3 1/4	1	<a href="#">05251-10-16</a>	7.50
5	2.50	2,000	3 1/4	1 1/4	<a href="#">05251-10-20</a>	7.50
6	1.50	800	1 5/8	3/4	<a href="#">06151-10-12</a>	
6	1.50	800	1 5/8	5/8	<a href="#">06151-10-10</a>	
6	2.00	1,300	2 3/16	3/4	<a href="#">06201-10-12</a>	6.80
6	2.50	2,500	3 1/4	1 1/4	<a href="#">06251-10-20</a>	12.00
6	2.50	2,500	3 1/4	1	<a href="#">06251-10-16</a>	12.00
6	3.00	2,500	3 1/4	1	<a href="#">06301-10-16</a>	12.00
6	3.00	2,500	3 1/4	1 1/4	<a href="#">06301-10-20</a>	12.00
7	3.00	4,000	3 1/4	1	<a href="#">07301-10-16</a>	27.00
7	3.00	4,000	3 1/4	1 1/4	<a href="#">07301-10-20</a>	27.00
7	3.00	6,000	3 1/4	1 1/4	<a href="#">07301-11-20</a>	27.00
7	3.00	6,000	3 1/4	1 1/2	<a href="#">07301-11-24</a>	27.00
8	2.00	1,500	2 3/16	3/4	<a href="#">08201-10-12</a>	7.50
8	2.00	1,500	2 3/16	5/8	<a href="#">08201-10-10</a>	7.50
8	3.00	3,500	3 1/4	1	<a href="#">08301-10-16</a>	15.00
8	3.00	3,500	3 1/4	1 1/4	<a href="#">08301-10-20</a>	15.00
8	3.00	4,500	3 1/4	1 1/4	<a href="#">08301-11-20</a>	25.00
8	4.00	5,000	4 1/4	1 1/4	<a href="#">08401-10-20</a>	28.00
10	3.00	3,500	3 1/4	1	<a href="#">10301-10-16</a>	30.00
10	3.00	3,500	3 1/4	1 1/4	<a href="#">10301-10-20</a>	30.00
10	3.00	4,000	3 1/4	1 1/4	<a href="#">10301-11-20</a>	30.00
10	3.00	4,000	3 1/4	1 1/2	<a href="#">10301-11-24</a>	30.00
10	4.00	6,000	4 1/4	1 1/4	<a href="#">10401-10-20</a>	32.00

CONTINUED

Capacity listed is for manual operation. For powered operations, consult factory.

\* These wheels are cast ductile iron. All dimensions are in inches. All weights are in pounds.

# WHEELS CAST IRON

## STRAIGHT ROLLER BEARING

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
12	2.50	2,500	3 1/4	1	<a href="#">12251-10-16</a>	37.00
12	2.50	2,500	3 1/4	1 1/4	<a href="#">12251-10-20</a>	37.00
12	3.00	3,000	3 1/4	1	<a href="#">12301-10-16</a>	39.00
12	3.00	3,000	3 1/4	1 1/4	<a href="#">12301-10-20</a>	39.00
12	4.00	7,500	4 1/4	1 1/4	<a href="#">12401-12-20*</a>	53.00
12	4.00	7,500	4 1/4	1 1/2	<a href="#">12401-12-24*</a>	53.00
12	5.00	10,000	5 1/4	1 1/4	<a href="#">12501-12-20*</a>	98.00
12	5.00	10,000	5 1/4	1 1/2	<a href="#">12501-12-24*</a>	98.00
14	4.00	7,000	4 1/4	1 1/4	<a href="#">14401-10-20</a>	60.00
16	3.00	3,000	3 1/4	1	<a href="#">16301-10-16</a>	64.00
16	3.00	3,000	3 1/4	1 1/4	<a href="#">16301-10-20</a>	64.00
16	4.00	7,500	4 1/4	1 1/4	<a href="#">16401-10-20</a>	72.00
16	4.00	7,500	4 1/4	1 1/2	<a href="#">16401-10-24</a>	72.00

## PRECISION TAPERED BEARING

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	3.00	2,000	3 1/2	3/4	<a href="#">04309-10-12</a>	7.00
4	4.00	4,000	4 1/2	1	<a href="#">04409-10-16</a>	11.00
4	4.00	4,000	4 1/2	1 1/4	<a href="#">04409-10-20</a>	11.00
5	2.50	2,000	3 1/2	3/4	<a href="#">05259-10-12</a>	7.50
6	2.50	2,500	3 1/2	3/4	<a href="#">06259-10-12</a>	12.00
6	2.50	2,500	3 1/2	1	<a href="#">06259-10-16</a>	12.00
6	3.00	2,500	3 1/2	3/4	<a href="#">06309-10-12</a>	12.00
6	3.00	2,500	3 1/2	1	<a href="#">06309-10-16</a>	12.00
7	3.00	4,000	3 1/2	3/4	<a href="#">07309-10-12</a>	27.00
7	3.00	6,000	3 1/2	1	<a href="#">07309-11-16</a>	27.00
7	3.00	6,000	3 1/2	1 1/4	<a href="#">07309-11-20</a>	27.00
8	3.00	4,500	3 1/2	3/4	<a href="#">08309-10-12</a>	15.00
8	3.00	4,500	3 1/2	1	<a href="#">08309-11-16</a>	25.00
8	3.00	4,500	3 1/2	1 1/4	<a href="#">08309-11-20</a>	25.00
8	4.00	5,000	4 1/2	1	<a href="#">08409-10-16</a>	28.00
8	4.00	5,000	4 1/2	1 1/4	<a href="#">08409-10-20</a>	28.00

CONTINUED

# WHEELS CAST IRON

## PRECISION TAPERED BEARING

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
10	3.00	3,500	3 1/2	3/4	<a href="#">10309-10-12</a>	30.00
10	3.00	3,500	3 1/2	1	<a href="#">10309-10-16</a>	30.00
10	3.00	4,000	3 1/2	1	<a href="#">10309-11-16</a>	30.00
10	3.00	4,000	3 1/2	1 1/4	<a href="#">10309-11-20</a>	30.00
10	4.00	6,000	4 1/2	1	<a href="#">10409-10-16</a>	32.00
10	4.00	6,000	4 1/2	1 1/4	<a href="#">10409-10-20</a>	32.00
12	3.00	3,000	3 1/2	3/4	<a href="#">12309-10-12</a>	39.00
12	3.00	3,000	3 1/2	1	<a href="#">12309-10-16</a>	39.00
12	4.00	7,500	4 1/2	1	<a href="#">12409-12-16*</a>	53.00
12	4.00	7,500	4 1/2	1 1/4	<a href="#">12409-12-20*</a>	53.00
12	5.00	15,000	5 1/2	1 1/4	<a href="#">12509-12-20*</a>	98.00
12	5.00	15,000	5 1/2	1 1/2	<a href="#">12509-12-24*</a>	98.00
12	6.00	10,000	6 1/2	1 1/4	<a href="#">12609-10-20</a>	75.00
12	6.00	10,000	6 1/2	1 1/2	<a href="#">12609-10-24</a>	75.00
14	4.00	7,000	4 1/2	1	<a href="#">14409-10-16</a>	60.00
14	4.00	7,000	4 1/2	1 1/4	<a href="#">14409-10-20</a>	60.00
16	3.00	3,000	3 1/2	1	<a href="#">16309-10-16</a>	64.00
16	4.00	7,500	4 1/2	1	<a href="#">16409-10-16</a>	72.00
16	4.00	7,500	4 1/2	1 1/4	<a href="#">16409-10-20</a>	72.00
16	4.00	7,500	4 1/2	1 1/2	<a href="#">16409-10-24</a>	72.00

## BEARINGLESS

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
3	1.25	450	1 1/2	3/8	<a href="#">03120-10-06</a>	2.00
4	1.50	600	1 11/16	1/2	<a href="#">04150-10-08</a>	3.40
4	2.00	1,000	2 3/16	1 3/16	<a href="#">04200-10-19</a>	4.00
4	3.00	2,000	3 1/4	1 15/16	<a href="#">04300-10-31</a>	7.00
4	4.00	4,000	4 1/4	2 7/16	<a href="#">04400-10-39</a>	11.00
5	2.00	1,500	2 3/16	1 3/16	<a href="#">05200-10-19</a>	6.00
5	2.50	2,000	3 1/4	1 15/16	<a href="#">05250-10-31</a>	7.50
6	2.00	1,300	2 3/16	1 3/16	<a href="#">06200-10-19</a>	6.80
6	2.50	2,500	3 1/4	1 15/16	<a href="#">06250-10-31</a>	12.00
6	3.00	2,500	3 1/4	1 15/16	<a href="#">06300-10-31</a>	12.00
7	3.00	4,000	3 1/4	1 15/16	<a href="#">07300-10-31</a>	27.00
7	3.00	6,000	3 1/4	2 7/16	<a href="#">07300-11-39</a>	27.00

CONTINUED

Capacity listed is for manual operation. For powered operations, consult factory.

\* These wheels are cast ductile iron. All dimensions are in inches. All weights are in pounds.

# WHEELS CAST IRON

## BEARINGLESS

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
8	2.00	1,500	2 3/16	1 3/16	<a href="#">08200-10-19</a>	7.50
8	3.00	3,500	3 1/4	1 15/16	<a href="#">08300-10-31</a>	15.00
8	4.00	5,000	4 1/4	2 7/16	<a href="#">08400-10-39</a>	28.00
10	3.00	3,500	3 1/4	1 15/16	<a href="#">10300-10-31</a>	30.00
10	3.00	4,000	3 1/4	2 7/16	<a href="#">10300-11-39</a>	30.00
10	4.00	6,000	4 1/4	2 7/16	<a href="#">10400-10-39</a>	32.00
12	4.00	7,500	4 1/4	2 7/16	<a href="#">12400-12-39*</a>	53.00
14	4.00	7,000	4 1/4	2 7/16	<a href="#">14400-10-39</a>	60.00
16	4.00	7,500	4 1/4	2 7/16	<a href="#">16400-10-39</a>	72.00

Capacity listed is for manual operation. For powered operations, consult factory.

\* These wheels are cast ductile iron. All dimensions are in inches. All weights are in pounds.



---

WHEELS  
**PHENOLIC RESIN**

# WHEELS PHENOLIC RESIN



MAXIMUM CAPACITY

**8,000** lbs.

## FEATURES

**Bearings:** Precision ball, delrin, straight roller and tapered.

**Standard:** All 1-1/2" and 2" wide wheels with 3/4" roller bearings are supplied with 1/2" spanner standard.

## APPLICATIONS

Phenolic wheels are excellent for waste bins, platform trucks, heavy material handling, autoclaves, baking ovens, curing ovens and high temperature bakery applications.

## BENEFITS

A wide selection of phenolic resin wheels are available in inventory. The wheels shown in the chart are laminated phenolic. The continuous wrap process of a phenolic wheel makes it longer wearing product that has a higher resistance to chipping and fraying.

Standard black phenolic wheels (30) feature macerated canvas duck compression molded with premium phenolic resins to produce a value/price relationship.

High temperature phenolic wheels (32) provide continuous service up to 425° Fahrenheit and intermittently to 500° Fahrenheit.

Laminated phenolic wheels (35) feature a continuous wound tread with a macerated canvas center. The wheels have a 40% higher impact resistance and carry up to 25% higher load than standard phenolic wheels.

# WHEELS PHENOLIC RESIN

## STRAIGHT ROLLER BEARING

Diameter	Width	Standard Capacity	Laminated Capacity	High Temp Capacity	Hub Length	Bore	Part Number	Weight
5	2.00	1,000	1,200	750	2 3/16	3/4	<a href="#">05201-30-12</a>	2.25
6	2.00	1,200	1,500	900	2 3/16	3/4	<a href="#">06201-30-12</a>	3.00
6	3.00	2,000	2,000	1,700	3 1/4	1	<a href="#">06301-30-16</a>	5.00
6	3.00	2,000	2,000	1,700	3 1/4	1 1/4	<a href="#">06301-30-20</a>	5.00
8	2.00	1,400	1,400	1,100	2 3/16	3/4	<a href="#">08201-30-12</a>	4.00
8	3.00	2,500	3,000	1,900	3 1/4	1	<a href="#">08301-30-16</a>	7.00
8	3.00	2,500	3,000	1,900	3 1/4	1 1/4	<a href="#">08301-30-20</a>	7.00
10	3.00	2,900	3,400	2,400	3 1/4	1	<a href="#">10301-30-16</a>	9.75
10	3.00	2,900	3,400	2,400	3 1/4	1 1/4	<a href="#">10301-30-20</a>	9.75
12	3.00	3,500	4,200	2,600	3 1/4	1	<a href="#">12301-30-16</a>	13.00
12	3.00	3,500	4,200	2,600	3 1/4	1 1/4	<a href="#">12301-30-20</a>	13.00

## PRECISION TAPERED BEARING

Diameter	Width	Standard Capacity	Laminated Capacity	High Temp Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	2,000	2,000	1,700	3 1/2	3/4	<a href="#">06309-30-12</a>	5.00
6	3.00	2,000	2,000	1,700	3 1/2	1	<a href="#">06309-30-16</a>	5.00
8	3.00	2,500	3,000	1,900	3 1/2	3/4	<a href="#">08309-30-12</a>	7.00
8	3.00	2,500	3,000	1,900	3 1/2	1	<a href="#">08309-30-16</a>	7.00
10	3.00	2,900	3,400	2,400	3 1/2	3/4	<a href="#">10309-30-12</a>	9.75
10	3.00	2,900	3,400	2,400	3 1/2	1	<a href="#">10309-30-16</a>	9.75
10	3.00	2,900	3,400	2,400	3 1/2	1 1/4	<a href="#">10309-30-20</a>	9.75
12	3.00	3,500	4,200	2,600	3 1/2	3/4	<a href="#">12309-30-12</a>	13.00

## PRECISION BEARING

Diameter	Width	Standard Capacity	Laminated Capacity	High Temp Capacity	Hub Length	Bore	Part Number	Weight
5	2.00	1,000	1,200	750	2 7/16	1/2	<a href="#">05204-30-08*</a>	2.25
6	2.00	1,200	1,500	900	2 7/16	1/2	<a href="#">06204-30-08*</a>	3.00
6	3.00	2,000	2,000	1,700	3 1/2	3/4	<a href="#">06302-30-12</a>	5.00
8	2.00	1,400	1,400	1,100	2 7/16	1/2	<a href="#">08204-30-08*</a>	4.00
8	3.00	2,500	3,000	1,900	3 1/2	3/4	<a href="#">08302-30-12</a>	7.00
10	3.00	2,900	3,400	2,400	3 1/2	3/4	<a href="#">10302-30-12</a>	9.75
12	3.00	3,500	4,200	2,600	3 1/2	3/4	<a href="#">12302-30-12</a>	13.00

All dimensions are in inches. All weights are in pounds.

\* These casters have annular ball bearings.

Note: part numbers listed are for Standard Phenolic wheels, for High Temp use "32" in place of "30" and for Laminated Phenolic use "35" in place of "30"

# WHEELS TWERGO®



MAXIMUM CAPACITY

**4,200** lbs.

## FEATURES

TWERGO® wheels are designed to achieve unparalleled ergonomic benefits, including reduced initial and continuous push force, and a reduction in force required to turn and maneuver. Furthermore, TWERGO® wheels can help increase productivity by reducing or maintaining existing push force, while increasing the load capacity.

TWERGO® wheel's unique tread thickness and twin wheel design minimizes friction and eliminates scrubbing and sliding when turning, while providing the impact resistance of normal wheels. These features give TWERGO® wheels superior performance in reducing ergonomic forces in manual operations and reducing power consumption in automated applications.

The multiple wheel design is anchored by a robust spanner that improves on existing wheel designs. The wheel hub features aluminum die-cast cores for maximum strength.

## APPLICATIONS

Excellent in any inside applications where ergonomics are a concern. Used in AGV applications to extend wheel life and reduce power consumption.

Designed for a wide variety of industrial applications, TWERGO® wheels provide easier movement of loaded carts or vehicles.

## BENEFITS

Benefits of TWERGO® include:

- Reduce Initial push force by an average of 25%.
- Independently rotating wheels reduce scrubbing and push force exerted to turn and maneuver.
- Aluminum core is lighter weight and resists corrosion.
- Increase load and productivity without increasing push force.

For optimal ergonomic benefit, we recommend using TWERGO® wheels on our ErgoXcel™ line of kingpinless, maintenance-free ergonomic rigs, including the 37, 55, 57 and 87 Series.

## PRECISION BALL BEARING (2 WHEEL DESIGN - 2" WIDTH)

Diameter	Width	Material	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	T/R Polyurethane	600	2 7/16	1/2	<a href="#">04202-93-08</a>	1.77
4	2.00	T/R-95 Polyurethane	1,000	2 7/16	1/2	<a href="#">04202-94-08</a>	1.77
4	2.00	ErgoTread	570	2 7/16	1/2	<a href="#">04202-44-08</a>	1.77
5	2.00	T/R Polyurethane	840	2 7/16	1/2	<a href="#">05202-93-08</a>	2.73
5	2.00	T/R-95 Polyurethane	1,170	2 7/16	1/2	<a href="#">05202-94-08</a>	2.73
5	2.00	ErgoTread	800	2 7/16	1/2	<a href="#">05202-44-08</a>	2.73
6	2.00	T/R Polyurethane	960	2 7/16	1/2	<a href="#">06202-93-08</a>	3.12
6	2.00	T/R-95 Polyurethane	1,400	2 7/16	1/2	<a href="#">06202-94-08</a>	3.12
6	2.00	ErgoTread	910	2 7/16	1/2	<a href="#">06202-44-08</a>	3.12
8	2.00	T/R Polyurethane	1,240	2 7/16	1/2	<a href="#">08202-93-08</a>	4.65
8	2.00	T/R-95 Polyurethane	1,800	2 7/16	1/2	<a href="#">08202-94-08</a>	4.65
8	2.00	ErgoTread	1,180	2 7/16	1/2	<a href="#">08202-44-08</a>	4.65
10	2.00	T/R Polyurethane	1,600	2 7/16	1/2	<a href="#">10202-93-08</a>	6.06
10	2.00	T/R-95 Polyurethane	2,500	2 7/16	1/2	<a href="#">10202-94-08</a>	6.06
10	2.00	ErgoTread	1,520	2 7/16	1/2	<a href="#">10202-44-08</a>	6.06

\* 12" diameter wheel only has two wheels for 3" wide design.  
All dimensions are in inches. All weights are in pounds.

CONTINUED

## PRECISION BALL BEARING (3 WHEEL DESIGN - 3" WIDTH)

Diameter	Width	Material	Capacity	Hub Length	Bore	Part Number	Weight
4	3.00	T/R Polyurethane	1,020	3 1/2	3/4	<a href="#">04302-93-12</a>	2.54
4	3.00	T/R-95 Polyurethane	1,575	3 1/2	3/4	<a href="#">04302-94-12</a>	2.54
4	3.00	ErgoTread	970	3 1/2	3/4	<a href="#">04302-44-12</a>	2.54
5	3.00	T/R Polyurethane	1,225	3 1/2	3/4	<a href="#">05302-93-12</a>	3.97
5	3.00	T/R-95 Polyurethane	1,755	3 1/2	3/4	<a href="#">05302-94-12</a>	3.97
5	3.00	ErgoTread	1,160	3 1/2	3/4	<a href="#">05302-44-12</a>	3.97
6	3.00	T/R Polyurethane	1,640	3 1/2	3/4	<a href="#">06302-93-12</a>	4.56
6	3.00	T/R-95 Polyurethane	2,070	3 1/2	3/4	<a href="#">06302-94-12</a>	4.56
6	3.00	ErgoTread	1,560	3 1/2	3/4	<a href="#">06302-44-12</a>	4.56
8	3.00	T/R Polyurethane	2,000	3 1/2	3/4	<a href="#">08302-93-12</a>	6.86
8	3.00	T/R-95 Polyurethane	2,800	3 1/2	3/4	<a href="#">08302-94-12</a>	6.86
8	3.00	ErgoTread	1,900	3 1/2	3/4	<a href="#">08302-44-12</a>	6.86
10	3.00	T/R Polyurethane	2,400	3 1/2	3/4	<a href="#">10302-93-12</a>	8.97
10	3.00	T/R-95 Polyurethane	3,100	3 1/2	3/4	<a href="#">10302-94-12</a>	8.97
10	3.00	ErgoTread	2,280	3 1/2	3/4	<a href="#">10302-44-12</a>	8.97
12	3.00	T/R Polyurethane	2,800	3 1/2	3/4	<a href="#">12302-93-12*</a>	11.60
12	3.00	T/R-95 Polyurethane	3,400	3 1/2	3/4	<a href="#">12302-94-12*</a>	11.60
12	3.00	ErgoTread	2,660	3 1/2	3/4	<a href="#">12302-44-12*</a>	11.60

\* 12" diameter wheel only has two wheels for 3" wide design.  
All dimensions are in inches. All weights are in pounds.



WHEELS  
**TWERGO® LITE**

# WHEELS TWERGO® LITE



MAXIMUM CAPACITY

**1,800** lbs.

## FEATURES

The single wheel version of our extraordinary TWERGO® wheels utilizes the same patented face design to reduce initial and continuous push force. TWERGO® Lite makes it easier to push a cart, reducing the amount of energy exerted by the operator.

TWERGO® Lite is the ultimate 2" wide wheel. It is designed to replace standard caster wheels by adding significant ergonomic benefits, without significantly increasing the price. TWERGO® Lite has a cast iron core, making it durable and strong enough to handle challenging environments. A tapered tread design helps to resist debris and push it away.

**Wheels:** 5" to 8" diameter wheels.

## APPLICATIONS

TWERGO® Lite is a great replacement to the conventional cast iron wheel, it offers the same cast iron core, while adding ergonomic benefits, making it a great choice for indoor applications like carts, racks, AGV's, and tug trains.

## BENEFITS

The benefits of TWERGO® Lite include:

- Ergonomic, reduce force exerted to start and continue rolling
- Durable and Strong with a Cast Iron Core
- Maintenance-free bearings never need greasing

For optimal ergonomic benefit, we recommend using TWERGO® Lite wheels on our ErgoXcel™ line of kingpinless, maintenance-free ergonomic rigs, including the 37, 55, 57 and 87 Series.

# WHEELS TWERGO® LITE

## PRECISION BALL BEARING

Diameter	Width	Material	Capacity	Hub Length	Bore	Part Number	Weight
5	2.00	T/R Polyurethane	840	2 7/16	1/2	<a href="#">05202-46-08</a>	3.00
5	2.00	T/R-95 Polyurethane	1,170	2 7/16	1/2	<a href="#">05202-47-08</a>	3.00
5	2.00	ErgoTread	800	2 7/16	1/2	<a href="#">05202-42-08</a>	3.00
6	2.00	T/R Polyurethane	960	2 7/16	1/2	<a href="#">06202-46-08</a>	4.50
6	2.00	T/R-95 Polyurethane	1,400	2 7/16	1/2	<a href="#">06202-47-08</a>	4.50
6	2.00	ErgoTread	900	2 7/16	1/2	<a href="#">06202-42-08</a>	4.50
8	2.00	T/R Polyurethane	1,240	2 7/16	1/2	<a href="#">08202-46-08</a>	8.00
8	2.00	T/R-95 Polyurethane	1,800	2 7/16	1/2	<a href="#">08202-47-08</a>	8.00
8	2.00	ErgoTread	1,100	2 7/16	1/2	<a href="#">08202-42-08</a>	8.00
10	2.00	T/R Polyurethane	1,600	2 7/16	1/2	<a href="#">10202-46-08</a>	8.00
10	2.00	T/R-95 Polyurethane	2,050	2 7/16	1/2	<a href="#">10202-47-08</a>	8.00
10	2.00	ErgoTread	1,440	2 7/16	1/2	<a href="#">10202-42-08</a>	8.00

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE



MAXIMUM CAPACITY

**11,250** lbs.

## FEATURES

**Bearings:** Precision ball, straight roller, precision tapered, delrin, oilite, bearingless.

## TESTING

In-house test dynamometers, with sophisticated metering equipment, allow Caster Concepts to develop test parameters for product duty – life cycle profile testing and performance evaluations prior to delivery to the field.

## BENEFITS

Caster Concepts processes polyurethane tread material in house, allowing us to create custom formulations to conquer specific challenges. We offer tread materials to help with ergonomics, high speed powered applications, harsh environments, chemicals, moisture and many more challenges.

## METRIC WHEELS

The capability to control the production of wheels through design, production, product testing and final shipment, has driven Caster Concepts to design and develop a full line of metric wheels for replacement on equipment produced in Europe and Asia.

Metric Wheel Diameters		
50mm	180mm	230mm
80mm	200mm	250mm
125mm	220mm	300mm

# WHEELS POLYURETHANE

## STRAIGHT ROLLER BEARING (Soft Poly - T/R-85A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	600	2 3/16	3/4	<a href="#">04201-61-12</a>	3.00
4	3.25	1,020	3 1/4	1	<a href="#">04321-61-16</a>	5.00
4	3.25	1,020	3 1/4	1 1/4	<a href="#">04321-61-20</a>	5.00
4	4.00	1,280	4 1/4	1 1/4	<a href="#">04401-61-20</a>	10.00
4	4.00	1,280	4 1/4	1 1/2	<a href="#">04401-61-24</a>	10.00
5	2.00	840	2 3/16	3/4	<a href="#">05201-61-12</a>	3.00
5	2.50	1,060	3 1/4	1	<a href="#">05251-61-16</a>	7.00
5	2.50	1,060	3 1/4	1 1/4	<a href="#">05251-61-20</a>	7.00
5	3.00	1,225	3 1/4	1	<a href="#">05301-61-16</a>	9.00
5	3.00	1,225	3 1/4	1 1/4	<a href="#">05301-61-20</a>	9.00
6	2.00	960	2 3/16	3/4	<a href="#">06201-61-12</a>	4.50
6	2.50	1,300	3 1/4	1	<a href="#">06251-61-16</a>	6.50
6	2.50	1,300	3 1/4	1 1/4	<a href="#">06251-61-20</a>	6.50
6	3.00	1,640	3 1/4	1	<a href="#">06301-61-16</a>	9.50
6	3.00	1,640	3 1/4	1 1/4	<a href="#">06301-61-20</a>	9.50
8	2.00	1,240	2 3/16	3/4	<a href="#">08201-61-12</a>	8.00
8	2.50	1,640	3 1/4	1	<a href="#">08251-61-16</a>	9.50
8	2.50	1,640	3 1/4	1 1/4	<a href="#">08251-61-20</a>	9.50
8	3.00	2,000	3 1/4	1	<a href="#">08301-61-16</a>	12.50
8	3.00	2,000	3 1/4	1 1/4	<a href="#">08301-61-20</a>	12.50
8	4.00	3,040	4 1/4	1 1/4	<a href="#">08401-61-20</a>	20.00
8	4.00	3,040	4 1/4	1 1/2	<a href="#">08401-61-24</a>	20.00
10	3.00	2,400	3 1/4	1	<a href="#">10301-61-16</a>	16.00
10	3.00	2,400	3 1/4	1 1/4	<a href="#">10301-61-20</a>	16.00
10	4.00	3,360	4 1/4	1 1/4	<a href="#">10401-61-20</a>	23.00
10	4.00	3,360	4 1/4	1 1/2	<a href="#">10401-61-24</a>	23.00
12	3.00	2,800	3 1/4	1	<a href="#">12301-61-16</a>	21.00
12	3.00	2,800	3 1/4	1 1/4	<a href="#">12301-61-20</a>	21.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## STRAIGHT ROLLER BEARING (Soft Poly - T/R-85A - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	2,050	3 1/4	1	<a href="#">06301-66-16</a>	9.50
6	3.00	2,050	3 1/4	1 1/4	<a href="#">06301-66-20</a>	9.50
6	4.00	2,400	4 1/4	1 1/4	<a href="#">06401-66-20</a>	17.00
6	4.00	2,400	4 1/4	1 1/2	<a href="#">06401-66-24</a>	17.00
6	5.00	2,960	5 1/4	1 1/4	<a href="#">06501-66-20</a>	20.00
6	5.00	2,960	5 1/4	1 1/2	<a href="#">06501-66-24</a>	20.00
8	3.00	2,480	3 1/4	1	<a href="#">08301-66-16</a>	17.00
8	3.00	2,480	3 1/4	1 1/4	<a href="#">08301-66-20</a>	17.00
10	3.00	2,960	3 1/4	1	<a href="#">10301-66-16</a>	24.00
10	3.00	2,960	3 1/4	1 1/4	<a href="#">10301-66-20</a>	24.00
10	3.00	2,960	3 1/4	1 1/2	<a href="#">10301-69-24</a>	24.00
10	4.00	4,000	4 1/4	1 1/4	<a href="#">10401-66-20</a>	33.00
10	4.00	4,000	4 1/4	1 1/2	<a href="#">10401-66-24</a>	33.00
10	5.00	4,800	5 1/4	1 1/4	<a href="#">10501-66-20</a>	45.00
12	3.00	3,080	3 1/4	1 1/4	<a href="#">12301-66-20</a>	24.00
12	3.00	3,080	3 1/4	1 1/2	<a href="#">12301-66-24</a>	24.00
12	4.00	4,400	4 1/4	1 1/4	<a href="#">12401-66-20</a>	30.00
12	4.00	4,400	4 1/4	1 1/2	<a href="#">12401-66-24</a>	30.00
12	5.00	5,200	5 1/4	1 1/4	<a href="#">12501-66-20</a>	45.00
12	5.00	5,200	5 1/4	1 1/2	<a href="#">12501-66-24</a>	45.00
16	4.00	4,825	4 1/4	1 1/4	<a href="#">16401-66-20</a>	40.00
16	4.00	4,825	4 1/4	1 1/2	<a href="#">16401-66-24</a>	40.00
16	5.00	6,000	5 1/4	1 1/4	<a href="#">16501-66-20</a>	72.00
16	5.00	6,000	5 1/4	1 1/2	<a href="#">16501-66-24</a>	72.00
18	5.00	6,400	5 1/4	1 1/4	<a href="#">18501-66-20</a>	90.00
18	5.00	6,400	5 1/4	1 1/2	<a href="#">18501-66-24</a>	90.00
20	5.00	6,750	5 1/4	1 1/4	<a href="#">20501-66-20</a>	110.00
20	5.00	6,750	5 1/4	1 1/2	<a href="#">20501-66-24</a>	110.00
20	5.00	6,750	5 1/4	2	<a href="#">20501-66-32</a>	110.00

CONTINUED

# WHEELS POLYURETHANE

## PRECISION TAPERED BEARING (Soft Poly - T/R-85A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	600	2 7/16	1/2	<a href="#">04209-61-08</a>	3.00
4	3.25	1,020	3 1/2	3/4	<a href="#">04329-61-12</a>	5.00
4	3.25	1,020	3 1/2	1	<a href="#">04329-61-16</a>	5.00
4	4.00	1,280	4 1/2	1	<a href="#">04409-61-16</a>	10.00
4	4.00	1,280	4 1/2	1 1/4	<a href="#">04409-61-20</a>	10.00
5	2.00	840	2 7/16	1/2	<a href="#">05209-61-08</a>	3.00
5	2.50	1,060	3 1/2	3/4	<a href="#">05259-61-12</a>	7.00
5	2.50	1,060	3 1/2	1	<a href="#">05259-61-16</a>	7.00
5	3.00	1,225	3 1/4	3/4	<a href="#">05309-61-12</a>	9.00
5	3.00	1,225	3 1/4	1	<a href="#">05309-61-16</a>	9.00
6	2.00	960	2 7/16	1/2	<a href="#">06209-61-08</a>	4.50
6	2.00	960	2 7/16	3/4	<a href="#">06209-61-12</a>	4.50
6	2.50	1,300	3 1/2	3/4	<a href="#">06259-61-12</a>	6.50
6	2.50	1,300	3 1/2	1	<a href="#">06259-61-16</a>	6.50
6	3.00	1,640	3 1/2	3/4	<a href="#">06309-61-12</a>	9.50
6	3.00	1,640	3 1/2	1	<a href="#">06309-61-16</a>	9.50
6	3.00	1,640	3 1/2	1 1/4	<a href="#">06309-61-20</a>	9.50
8	2.00	1,240	2 7/16	3/4	<a href="#">08209-61-12</a>	8.00
8	2.50	1,640	3 1/2	3/4	<a href="#">08259-61-12</a>	9.50
8	2.50	1,640	3 1/2	1	<a href="#">08259-61-16</a>	9.50
8	3.00	2,000	3 1/2	3/4	<a href="#">08309-61-12</a>	12.50
8	3.00	2,000	3 1/2	1	<a href="#">08309-61-16</a>	12.50
8	3.00	2,000	3 1/2	1 1/4	<a href="#">08309-61-20</a>	12.50
8	4.00	3,040	4 1/2	1	<a href="#">08409-61-16</a>	20.00
8	4.00	3,040	4 1/2	1 1/4	<a href="#">08409-61-20</a>	20.00
10	3.00	2,400	3 1/2	3/4	<a href="#">10309-61-12</a>	16.00
10	3.00	2,400	3 1/2	1	<a href="#">10309-61-16</a>	16.00
10	3.00	2,400	3 1/2	1 1/4	<a href="#">10309-61-20</a>	16.00
10	4.00	3,360	4 1/2	1	<a href="#">10409-61-16</a>	23.00
10	4.00	3,360	4 1/2	1 1/4	<a href="#">10409-61-20</a>	23.00
12	3.00	2,800	3 1/2	3/4	<a href="#">12309-61-12</a>	21.00
12	3.00	2,800	3 1/2	1	<a href="#">12309-61-16</a>	21.00
12	3.00	2,800	3 1/2	1 1/4	<a href="#">12309-61-20</a>	21.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## PRECISION TAPERED BEARING (Soft Poly - T/R-85A - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	2,050	3 1/2	3/4	<a href="#">06309-66-12</a>	9.50
6	4.00	2,050	3 1/2	1	<a href="#">06309-66-16</a>	9.50
6	4.00	2,400	4 1/2	1	<a href="#">06409-66-16</a>	17.00
6	4.00	2,400	4 1/2	1 1/4	<a href="#">06409-66-20</a>	17.00
6	5.00	2,960	5 1/2	1	<a href="#">06509-66-16</a>	20.00
6	5.00	2,960	5 1/2	1 1/4	<a href="#">06509-66-20</a>	20.00
8	3.00	2,480	3 1/2	3/4	<a href="#">08309-66-12</a>	17.00
8	3.00	2,480	3 1/2	1	<a href="#">08309-66-16</a>	17.00
10	3.00	2,960	3 1/2	3/4	<a href="#">10309-66-12</a>	24.00
10	3.00	2,960	3 1/2	1	<a href="#">10309-66-16</a>	24.00
10	3.00	2,960	3 1/2	1 1/4	<a href="#">10309-69-20</a>	24.00
10	4.00	4,000	4 1/2	1	<a href="#">10409-66-16</a>	33.00
10	4.00	4,000	4 1/2	1 1/4	<a href="#">10409-66-20</a>	33.00
12	3.00	3,080	3 1/2	1	<a href="#">12309-66-16</a>	24.00
12	3.00	3,080	3 1/2	1 1/4	<a href="#">12309-66-20</a>	24.00
12	4.00	4,400	4 1/2	1	<a href="#">12409-66-16</a>	30.00
12	4.00	4,400	4 1/2	1 1/4	<a href="#">12409-66-20</a>	30.00
12	5.00	5,200	5 1/2	1	<a href="#">12509-66-16</a>	45.00
12	5.00	5,200	5 1/2	1 1/4	<a href="#">12509-66-20</a>	45.00
16	4.00	4,825	4 1/2	1	<a href="#">16409-66-16</a>	40.00
16	4.00	4,825	4 1/2	1 1/4	<a href="#">16409-66-20</a>	40.00
16	5.00	6,000	5 1/2	1	<a href="#">16509-66-16</a>	72.00
16	5.00	6,000	5 1/2	1 1/4	<a href="#">16509-66-20</a>	72.00
18	5.00	6,400	5 1/2	1	<a href="#">18509-66-16</a>	90.00
18	5.00	6,400	5 1/2	1 1/4	<a href="#">18509-66-20</a>	90.00
20	5.00	6,750	5 1/2	1	<a href="#">20509-66-16</a>	110.00
20	5.00	6,750	5 1/2	1 1/4	<a href="#">20509-66-20</a>	110.00
20	5.00	6,750	5 1/2	1 1/2	<a href="#">20509-66-24</a>	110.00
20	5.00	6,750	5 1/2	2	<a href="#">20509-66-32</a>	110.00

CONTINUED

# WHEELS POLYURETHANE

## BEARINGLESS (Soft Poly - T/R-85A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	600	2 3/16	1 3/16	<a href="#">04200-61-19</a>	3.00
4	3.25	1,020	3 1/4	1 15/16	<a href="#">04320-61-31</a>	5.00
4	4.00	1,280	4 1/4	2 7/16	<a href="#">04400-61-39</a>	10.00
5	2.00	840	2 3/16	1 3/16	<a href="#">05200-61-19</a>	3.00
5	2.50	1,060	3 1/4	1 15/16	<a href="#">05250-61-31</a>	7.00
5	3.00	1,225	3 1/4	1 15/16	<a href="#">05300-61-31</a>	9.00
6	2.00	960	2 3/16	1 1/5	<a href="#">06200-61-19</a>	4.50
6	2.50	1,300	3 1/4	1 15/16	<a href="#">06250-61-31</a>	6.50
6	3.00	1,640	3 1/4	1 15/16	<a href="#">06300-61-31</a>	9.50
8	2.00	1,240	2 3/16	1 3/16	<a href="#">08200-61-19</a>	8.00
8	2.50	1,640	3 1/4	1 15/16	<a href="#">08250-61-31</a>	9.50
8	3.00	2,000	3 1/4	1 15/16	<a href="#">08300-61-31</a>	12.50
8	4.00	3,040	4 1/4	2 7/16	<a href="#">08400-61-39</a>	20.00
10	3.00	2,400	3 1/4	1 8/9	<a href="#">10300-61-31</a>	16.00
10	4.00	3,360	4 1/4	2 7/16	<a href="#">10400-61-39</a>	23.00
12	3.00	2,800	3 1/4	1 15/16	<a href="#">12300-61-31</a>	21.00

## BEARINGLESS (Soft Poly - T/R-85A - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	2,050	3 1/4	1 15/16	<a href="#">06300-66-31</a>	9.50
6	4.00	2,400	4 1/4	2 7/16	<a href="#">06400-66-39</a>	17.00
6	5.00	2,960	5 1/4	2 7/16	<a href="#">06500-66-39</a>	20.00
8	3.00	2,480	3 1/4	1 15/16	<a href="#">08300-66-31</a>	17.00
10	3.00	2,960	3 1/4	2 7/16	<a href="#">10300-69-39</a>	24.00
10	3.00	2,960	3 1/4	1 15/16	<a href="#">10300-66-31</a>	24.00
10	4.00	4,000	4 1/4	2 7/16	<a href="#">10400-66-39</a>	33.00
10	5.00	4,800	5 1/4	2 7/16	<a href="#">10500-66-39</a>	45.00
12	3.00	3,080	3 1/4	2 7/16	<a href="#">12300-66-39</a>	24.00
12	4.00	4,400	4 1/4	2 7/16	<a href="#">12400-66-39</a>	30.00
12	5.00	5,200	5 1/4	2 7/16	<a href="#">12500-66-39</a>	45.00
16	4.00	4,825	4 1/4	2 7/16	<a href="#">16400-66-39</a>	40.00
16	5.00	6,000	5 1/4	2 7/16	<a href="#">16500-66-39</a>	72.00
18	5.00	6,400	5 1/4	2 7/16	<a href="#">18500-66-39</a>	90.00
20	5.00	6,750	5 1/4	2 7/16	<a href="#">20500-66-39</a>	110.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## PRECISION BALL BEARING (Soft Poly - T/R-85A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
5	2.00	840	2 7/16	1/2	<a href="#">05202-61-08</a>	3.00
6	2.00	960	2 7/16	1/2	<a href="#">06202-61-08</a>	4.50
6	3.00	1,640	3 1/2	3/4	<a href="#">06302-61-12</a>	9.50
8	2.00	1,240	2 7/16	1/2	<a href="#">08202-61-08</a>	8.00
8	2.50	1,640	3 1/2	3/4	<a href="#">08252-61-12</a>	9.50
8	3.00	2,000	3 1/2	3/4	<a href="#">08302-61-12</a>	12.50
8	3.00	2,000	3 1/2	1	<a href="#">08302-61-16</a>	12.50
10	3.00	2,400	3 1/2	3/4	<a href="#">10302-61-12</a>	16.00
10	3.00	2,400	3 1/2	1	<a href="#">10302-61-16</a>	16.00
12	3.00	2,800	3 1/2	3/4	<a href="#">12302-61-12</a>	21.00
12	3.00	2,800	3 1/2	1	<a href="#">12302-61-16</a>	21.00
12	3.00	2,800	3 1/2	1 1/4	<a href="#">12302-61-20</a>	21.00

## PRECISION BALL BEARING (Soft Poly - T/R-85A - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	600	2 7/16	1/2	<a href="#">04202-66-08</a>	3.00

## PRECISION BALL BEARING (Soft Poly - Round Tread - T/R-85A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	500	2 7/16	1/2	<a href="#">04202-51-08</a>	3.00
6	2.00	800	2 7/16	1/2	<a href="#">06202-51-08</a>	4.00
8	2.00	1,000	2 7/16	1/2	<a href="#">08202-51-08</a>	5.50
12	1.75	1,500	3 1/2	3/4	<a href="#">12172-61-12</a>	18.00



## BALLOON ROUND TREAD

CONTINUED

# WHEELS POLYURETHANE

## STRAIGHT ROLLER BEARING (Standard Poly - 95A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	750	2 3/16	3/4	<a href="#">04201-60-12</a>	3.00
4	3.25	1,275	3 1/4	1	<a href="#">04321-60-16</a>	5.00
4	3.25	1,275	3 1/4	1 1/4	<a href="#">04321-60-20</a>	5.00
4	4.00	1,600	4 1/4	1 1/4	<a href="#">04401-60-20</a>	10.00
4	4.00	1,600	4 1/4	1 1/2	<a href="#">04401-60-24</a>	10.00
5	2.00	1,050	2 3/16	3/4	<a href="#">05201-60-12</a>	3.00
5	2.50	1,325	3 1/4	1	<a href="#">05251-60-16</a>	7.00
5	2.50	1,325	3 1/4	1 1/4	<a href="#">05251-60-20</a>	7.00
5	3.00	1,335	3 1/4	1	<a href="#">05301-60-16</a>	9.00
5	3.00	1,530	3 1/4	1 1/4	<a href="#">05301-60-20</a>	9.00
6	2.00	1,200	2 3/16	3/4	<a href="#">06201-60-12</a>	4.50
6	2.50	1,625	3 1/4	1	<a href="#">06251-60-16</a>	6.50
6	2.50	1,625	3 1/4	1 1/4	<a href="#">06251-60-20</a>	6.50
6	3.00	2,050	3 1/4	1	<a href="#">06301-60-16</a>	9.50
6	3.00	2,050	3 1/4	1 1/4	<a href="#">06301-60-20</a>	9.50
8	2.00	1,550	2 3/16	3/4	<a href="#">08201-60-12</a>	8.00
8	2.50	2,050	3 1/4	1	<a href="#">08251-60-16</a>	9.50
8	2.50	2,050	3 1/4	1 1/4	<a href="#">08251-60-20</a>	9.50
8	3.00	2,500	3 1/4	1	<a href="#">08301-60-16</a>	12.50
8	3.00	2,500	3 1/4	1 1/4	<a href="#">08301-60-20</a>	12.50
8	4.00	3,800	4 1/4	1 1/4	<a href="#">08401-60-20</a>	20.00
8	4.00	3,800	4 1/4	1 1/2	<a href="#">08401-60-24</a>	20.00
10	3.00	3,000	3 1/4	1	<a href="#">10301-60-16</a>	16.00
10	3.00	3,000	3 1/4	1 1/4	<a href="#">10301-60-20</a>	16.00
10	4.00	4,200	4 1/4	1 1/4	<a href="#">10401-60-20</a>	23.00
10	4.00	4,200	4 1/4	1 1/2	<a href="#">10401-60-24</a>	23.00
12	3.00	3,500	3 1/4	1	<a href="#">12301-60-16</a>	21.00
12	3.00	3,500	3 1/4	1 1/4	<a href="#">12301-60-20</a>	21.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## STRAIGHT ROLLER BEARING (Standard Poly - 95A - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	2,450	3 1/4	1	<a href="#">06301-65-16</a>	9.50
6	3.00	2,450	3 1/4	1 1/4	<a href="#">06301-65-20</a>	9.50
6	4.00	3,000	4 1/4	1 1/4	<a href="#">06401-65-20</a>	17.00
6	4.00	3,000	4 1/4	1 1/2	<a href="#">06401-65-24</a>	17.00
6	5.00	3,700	5 1/4	1 1/4	<a href="#">06501-65-20</a>	20.00
6	5.00	3,700	5 1/4	1 1/2	<a href="#">06501-65-24</a>	20.00
8	3.00	3,100	3 1/4	1	<a href="#">08301-65-16</a>	17.00
8	3.00	3,100	3 1/4	1 1/4	<a href="#">08301-65-20</a>	17.00
10	3.00	3,700	3 1/4	1	<a href="#">10301-65-16</a>	24.00
10	3.00	3,700	3 1/4	1 1/4	<a href="#">10301-65-20</a>	24.00
10	3.00	3,700	3 1/4	1 1/2	<a href="#">10301-68-24</a>	24.00
10	4.00	5,000	4 1/4	1 1/4	<a href="#">10401-65-20</a>	33.00
10	4.00	5,000	4 1/4	1 1/2	<a href="#">10401-65-24</a>	33.00
10	5.00	6,000	5 1/4	1 1/4	<a href="#">10501-65-20</a>	45.00
12	3.00	3,850	3 1/4	1 1/4	<a href="#">12301-65-20</a>	24.00
12	3.00	3,850	3 1/4	1 1/2	<a href="#">12301-65-24</a>	24.00
12	4.00	5,500	4 1/4	1 1/4	<a href="#">12401-65-20</a>	30.00
12	4.00	5,500	4 1/4	1 1/2	<a href="#">12401-65-24</a>	30.00
12	5.00	6,500	5 1/4	1 1/4	<a href="#">12501-65-20</a>	45.00
12	5.00	6,500	5 1/4	1 1/2	<a href="#">12501-65-24</a>	45.00
16	4.00	6,000	4 1/4	1 1/4	<a href="#">16401-65-20</a>	40.00
16	4.00	6,000	4 1/4	1 1/2	<a href="#">16401-65-24</a>	40.00
16	5.00	8,000	5 1/4	1 1/4	<a href="#">16501-65-20</a>	72.00
16	5.00	8,000	5 1/4	1 1/2	<a href="#">16501-65-24</a>	72.00
18	5.00	8,500	5 1/4	1 1/4	<a href="#">18501-65-20</a>	90.00
18	5.00	8,500	5 1/4	1 1/2	<a href="#">18501-65-24</a>	90.00
20	5.00	9,000	5 1/4	1 1/4	<a href="#">20501-65-20</a>	110.00
20	5.00	9,000	5 1/4	1 1/2	<a href="#">20501-65-24</a>	110.00
20	5.00	9,000	5 1/4	2	<a href="#">20501-65-32</a>	110.00

CONTINUED

# WHEELS POLYURETHANE

## PRECISION TAPERED BEARING (Standard Poly - 95A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	750	2 7/16	1/2	<a href="#">04209-60-08</a>	3.00
4	3.25	1,275	3 1/2	3/4	<a href="#">04329-60-12</a>	5.00
4	3.25	1,275	3 1/2	1	<a href="#">04329-60-16</a>	5.00
4	4.00	1,600	4 1/2	1	<a href="#">04409-60-16</a>	10.00
4	4.00	1,600	4 1/2	1 1/4	<a href="#">04409-60-20</a>	10.00
5	2.00	1,050	2 7/16	1/2	<a href="#">05209-60-08</a>	3.00
5	2.50	1,325	3 1/2	3/4	<a href="#">05259-60-12</a>	7.00
5	2.50	1,325	3 1/2	1	<a href="#">05259-60-16</a>	7.00
5	3.00	1,530	3 1/4	3/4	<a href="#">05309-60-12</a>	9.00
5	3.00	1,530	3 1/4	1	<a href="#">05309-60-16</a>	9.00
6	2.00	1,200	2 7/16	1/2	<a href="#">06209-60-08</a>	4.50
6	2.00	1,200	2 7/16	3/4	<a href="#">06209-60-12</a>	4.50
6	2.50	1,625	3 1/2	3/4	<a href="#">06259-60-12</a>	6.50
6	2.50	1,625	3 1/2	1	<a href="#">06259-60-16</a>	6.50
6	3.00	2,050	3 1/2	3/4	<a href="#">06309-60-12</a>	9.50
6	3.00	2,050	3 1/2	1	<a href="#">06309-60-16</a>	9.50
6	3.00	2,050	3 1/2	1 1/4	<a href="#">06309-60-20</a>	9.50
8	2.00	1,550	2 7/16	3/4	<a href="#">08209-60-12</a>	8.00
8	2.50	2,050	3 1/2	3/4	<a href="#">08259-60-12</a>	9.50
8	2.50	2,050	3 1/2	1	<a href="#">08259-60-16</a>	9.50
8	3.00	2,500	3 1/2	3/4	<a href="#">08309-60-12</a>	12.50
8	3.00	2,500	3 1/2	1	<a href="#">08309-60-16</a>	12.50
8	3.00	2,500	3 1/2	1 1/4	<a href="#">08309-60-20</a>	12.50
8	4.00	3,800	4 1/2	1	<a href="#">08409-60-16</a>	20.00
8	4.00	3,800	4 1/2	1 1/4	<a href="#">08409-60-20</a>	20.00
10	3.00	3,000	3 1/2	3/4	<a href="#">10309-60-12</a>	16.00
10	3.00	3,000	3 1/2	1	<a href="#">10309-60-16</a>	16.00
10	3.00	3,000	3 1/2	1 1/4	<a href="#">10309-60-20</a>	16.00
10	4.00	4,200	4 1/2	1	<a href="#">10409-60-16</a>	23.00
10	4.00	4,200	4 1/2	1 1/4	<a href="#">10409-60-20</a>	23.00
12	3.00	3,500	3 1/2	3/4	<a href="#">12309-60-12</a>	21.00
12	3.00	3,500	3 1/2	1	<a href="#">12309-60-16</a>	21.00
12	3.00	3,500	3 1/2	1 1/4	<a href="#">12309-60-20</a>	21.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## PRECISION TAPERED BEARING (Standard Poly - 95A - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	2,450	3 1/2	3/4	<a href="#">06309-65-12</a>	9.50
6	4.00	2,450	3 1/2	1	<a href="#">06309-65-16</a>	9.50
6	4.00	3,000	4 1/2	1	<a href="#">06409-65-16</a>	17.00
6	4.00	3,000	4 1/2	1 1/4	<a href="#">06409-65-20</a>	17.00
6	5.00	3,700	5 1/2	1	<a href="#">06509-65-16</a>	20.00
6	5.00	3,700	5 1/2	1 1/4	<a href="#">06509-65-20</a>	20.00
8	3.00	3,100	3 1/2	3/4	<a href="#">08309-65-12</a>	17.00
8	3.00	3,100	3 1/2	1	<a href="#">08309-65-16</a>	17.00
10	3.00	3,700	3 1/2	3/4	<a href="#">10309-65-12</a>	24.00
10	3.00	3,700	3 1/2	1	<a href="#">10309-65-16</a>	24.00
10	3.00	3,700	3 1/2	1 1/4	<a href="#">10309-68-20</a>	24.00
10	4.00	5,000	4 1/2	1	<a href="#">10409-65-16</a>	33.00
10	4.00	5,000	4 1/2	1 1/4	<a href="#">10409-65-20</a>	33.00
12	3.00	3,850	3 1/2	1	<a href="#">12309-65-16</a>	24.00
12	3.00	3,850	3 1/2	1 1/4	<a href="#">12309-65-20</a>	24.00
12	4.00	5,500	4 1/2	1	<a href="#">12409-65-16</a>	30.00
12	4.00	5,500	4 1/2	1 1/4	<a href="#">12409-65-20</a>	30.00
12	5.00	6,500	5 1/2	1	<a href="#">12509-65-16</a>	45.00
12	5.00	6,500	5 1/2	1 1/4	<a href="#">12509-65-20</a>	45.00
16	4.00	6,000	4 1/2	1	<a href="#">16409-65-16</a>	40.00
16	4.00	6,000	4 1/2	1 1/4	<a href="#">16409-65-20</a>	40.00
16	5.00	8,000	5 1/2	1	<a href="#">16509-65-16</a>	72.00
16	5.00	8,000	5 1/2	1 1/4	<a href="#">16509-65-20</a>	72.00
18	5.00	8,500	5 1/2	1	<a href="#">18509-65-16</a>	90.00
18	5.00	8,500	5 1/2	1 1/4	<a href="#">18509-65-20</a>	90.00
20	5.00	9,000	5 1/2	1	<a href="#">20509-65-16</a>	110.00
20	5.00	9,000	5 1/2	1 1/4	<a href="#">20509-65-20</a>	110.00
20	5.00	9,000	5 1/2	1 1/2	<a href="#">20509-65-24</a>	110.00
20	5.00	9,000	5 1/2	2	<a href="#">20509-65-32</a>	110.00

CONTINUED

# WHEELS POLYURETHANE

## BEARINGLESS (Standard Poly - 95A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	750	2 3/16	1 3/16	<a href="#">04200-60-19</a>	3.00
4	3.25	1,275	3 1/4	1 15/16	<a href="#">04320-60-31</a>	5.00
4	4.00	1,600	4 1/4	2 7/16	<a href="#">04400-60-39</a>	10.00
5	2.00	1,050	2 3/16	1 3/16	<a href="#">05200-60-19</a>	3.00
5	2.50	1,325	3 1/4	1 15/16	<a href="#">05250-60-31</a>	7.00
5	3.00	1,530	3 1/4	1 15/16	<a href="#">05300-60-31</a>	9.00
6	2.00	1,200	2 3/16	1 1/5	<a href="#">06200-60-19</a>	4.50
6	2.50	1,625	3 1/4	1 15/16	<a href="#">06250-60-31</a>	6.50
6	3.00	2,050	3 1/4	1 15/16	<a href="#">06300-60-31</a>	9.50
8	2.00	1,550	2 3/16	1 3/16	<a href="#">08200-60-19</a>	8.00
8	2.50	2,050	3 1/4	1 15/16	<a href="#">08250-60-31</a>	9.50
8	3.00	2,500	3 1/4	1 15/16	<a href="#">08300-60-31</a>	12.50
8	4.00	3,800	4 1/4	2 7/16	<a href="#">08400-60-39</a>	20.00
10	3.00	3,000	3 1/4	1 8/9	<a href="#">10300-60-31</a>	16.00
10	4.00	4,200	4 1/4	2 7/16	<a href="#">10400-60-39</a>	23.00
12	3.00	3,500	3 1/4	1 15/16	<a href="#">12300-60-31</a>	21.00

## BEARINGLESS (Standard Poly - 95A - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	2,450	3 1/4	1 15/16	<a href="#">06300-65-31</a>	9.50
6	4.00	3,000	4 1/4	2 7/16	<a href="#">06400-65-39</a>	17.00
6	5.00	3,700	5 1/4	2 7/16	<a href="#">06500-65-39</a>	20.00
8	3.00	3,100	3 1/4	1 15/16	<a href="#">08300-65-31</a>	17.00
10	3.00	3,700	3 1/4	2 7/16	<a href="#">10300-68-39</a>	24.00
10	3.00	3,700	3 1/4	1 15/16	<a href="#">10300-65-31</a>	24.00
10	4.00	5,000	4 1/4	2 7/16	<a href="#">10400-65-39</a>	33.00
10	5.00	6,000	5 1/4	2 7/16	<a href="#">10500-65-39</a>	45.00
12	3.00	3,850	3 1/4	2 7/16	<a href="#">12300-65-39</a>	24.00
12	4.00	5,500	4 1/4	2 7/16	<a href="#">12400-65-39</a>	30.00
12	5.00	6,500	5 1/4	2 7/16	<a href="#">12500-65-39</a>	45.00
16	4.00	6,000	4 1/4	2 7/16	<a href="#">16400-65-39</a>	40.00
16	5.00	8,000	5 1/4	2 7/16	<a href="#">16500-65-39</a>	72.00
18	5.00	8,500	5 1/4	2 7/16	<a href="#">18500-65-39</a>	90.00
20	5.00	9,000	5 1/4	2 7/16	<a href="#">20500-65-39</a>	110.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## PRECISION BALL BEARING (Standard Poly - 95A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
5	2.00	1,050	2 7/16	1/2	<a href="#">05202-60-08</a>	3.00
6	2.00	1,200	2 7/16	1/2	<a href="#">06202-60-08</a>	4.50
6	3.00	2,050	3 1/2	3/4	<a href="#">06302-60-12</a>	9.50
8	2.00	1,550	2 7/16	1/2	<a href="#">08202-60-08</a>	8.00
8	2.50	2,050	3 1/2	3/4	<a href="#">08252-60-12</a>	9.50
8	3.00	2,500	3 1/2	3/4	<a href="#">08302-60-12</a>	12.50
8	3.00	2,500	3 1/2	1	<a href="#">08302-60-16</a>	12.50
10	3.00	3,000	3 1/2	3/4	<a href="#">10302-60-12</a>	16.00
10	3.00	3,000	3 1/2	1	<a href="#">10302-60-16</a>	16.00
12	3.00	3,500	3 1/2	3/4	<a href="#">12302-60-12</a>	21.00
12	3.00	3,500	3 1/2	1	<a href="#">12302-60-16</a>	21.00
12	3.00	3,500	3 1/2	1 1/4	<a href="#">12302-60-20</a>	21.00

## PRECISION BALL BEARING (Standard Poly - 95A - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	750	2 7/16	1/2	<a href="#">04202-65-08</a>	3.00

## PRECISION BALL BEARING (Standard Poly - Round Tread - 95A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	600	2 7/16	1/2	<a href="#">04202-50-08</a>	3.00
6	2.00	1,000	2 7/16	1/2	<a href="#">06202-50-08</a>	4.00
8	2.00	1,240	2 7/16	1/2	<a href="#">08202-50-08</a>	5.50
12	1.75	1,700	3 1/2	3/4	<a href="#">12172-60-12</a>	18.00



## BALLOON ROUND TREAD

CONTINUED

# WHEELS POLYURETHANE

## STRAIGHT ROLLER BEARING (Hard Poly - 70D)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	900	2 3/16	3/4	<a href="#">04201-63-12</a>	3.00
4	3.25	1,530	3 1/4	1	<a href="#">04321-63-16</a>	5.00
4	3.25	1,530	3 1/4	1 1/4	<a href="#">04321-63-20</a>	5.00
4	4.00	1,920	4 1/4	1 1/4	<a href="#">04401-63-20</a>	10.00
4	4.00	1,920	4 1/4	1 1/2	<a href="#">04401-63-24</a>	10.00
5	2.00	1,260	2 3/16	3/4	<a href="#">05201-63-12</a>	3.00
5	2.50	1,590	3 1/4	1	<a href="#">05251-63-16</a>	7.00
5	2.50	1,590	3 1/4	1 1/4	<a href="#">05251-63-20</a>	7.00
5	3.00	1,335	3 1/4	1	<a href="#">05301-63-16</a>	9.00
5	3.00	1,836	3 1/4	1 1/4	<a href="#">05301-63-20</a>	9.00
6	2.00	1,440	2 3/16	3/4	<a href="#">06201-63-12</a>	4.50
6	2.50	1,950	3 1/4	1	<a href="#">06251-63-16</a>	6.50
6	2.50	1,950	3 1/4	1 1/4	<a href="#">06251-63-20</a>	6.50
6	3.00	2,460	3 1/4	1	<a href="#">06301-63-16</a>	9.50
6	3.00	2,460	3 1/4	1 1/4	<a href="#">06301-63-20</a>	9.50
8	2.00	1,860	2 3/16	3/4	<a href="#">08201-63-12</a>	8.00
8	2.50	2,460	3 1/4	1	<a href="#">08251-63-16</a>	9.50
8	2.50	2,460	3 1/4	1 1/4	<a href="#">08251-63-20</a>	9.50
8	3.00	3,000	3 1/4	1	<a href="#">08301-63-16</a>	12.50
8	3.00	3,000	3 1/4	1 1/4	<a href="#">08301-63-20</a>	12.50
8	4.00	4,560	4 1/4	1 1/4	<a href="#">08401-63-20</a>	20.00
8	4.00	4,560	4 1/4	1 1/2	<a href="#">08401-63-24</a>	20.00
10	3.00	3,600	3 1/4	1	<a href="#">10301-63-16</a>	16.00
10	3.00	3,600	3 1/4	1 1/4	<a href="#">10301-63-20</a>	16.00
10	4.00	5,040	4 1/4	1 1/4	<a href="#">10401-63-20</a>	23.00
10	4.00	5,040	4 1/4	1 1/2	<a href="#">10401-63-24</a>	23.00
12	3.00	4,200	3 1/4	1	<a href="#">12301-63-16</a>	21.00
12	3.00	4,200	3 1/4	1 1/4	<a href="#">12301-63-20</a>	21.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## STRAIGHT ROLLER BEARING (Hard Poly - 70D - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	2,950	3 1/4	1	<a href="#">06301-67-16</a>	9.50
6	3.00	2,950	3 1/4	1 1/4	<a href="#">06301-67-20</a>	9.50
6	4.00	3,600	4 1/4	1 1/4	<a href="#">06401-67-20</a>	17.00
6	4.00	3,600	4 1/4	1 1/2	<a href="#">06401-67-24</a>	17.00
6	5.00	4,400	5 1/4	1 1/4	<a href="#">06501-67-20</a>	20.00
6	5.00	4,400	5 1/4	1 1/2	<a href="#">06501-67-24</a>	20.00
8	3.00	3,500	3 1/4	1	<a href="#">08301-67-16</a>	17.00
8	3.00	3,500	3 1/4	1 1/4	<a href="#">08301-67-20</a>	17.00
10	3.00	4,400	3 1/4	1	<a href="#">10301-67-16</a>	24.00
10	3.00	4,400	3 1/4	1 1/4	<a href="#">10301-67-20</a>	24.00
10	3.00	4,400	3 1/4	1 1/2	<a href="#">10301-67-24</a>	24.00
10	4.00	6,000	4 1/4	1 1/4	<a href="#">10401-67-20</a>	33.00
10	4.00	6,000	4 1/4	1 1/2	<a href="#">10401-67-24</a>	33.00
10	5.00	7,200	5 1/4	1 1/4	<a href="#">10501-67-20</a>	45.00
12	3.00	4,620	3 1/4	1 1/4	<a href="#">12301-67-20</a>	24.00
12	3.00	4,620	3 1/4	1 1/2	<a href="#">12301-67-24</a>	24.00
12	4.00	6,600	4 1/4	1 1/4	<a href="#">12401-67-20</a>	30.00
12	4.00	6,600	4 1/4	1 1/2	<a href="#">12401-67-24</a>	30.00
12	5.00	7,800	5 1/4	1 1/4	<a href="#">12501-67-20</a>	45.00
12	5.00	7,800	5 1/4	1 1/2	<a href="#">12501-67-24</a>	45.00
16	4.00	8,000	4 1/4	1 1/4	<a href="#">16401-67-20</a>	40.00
16	4.00	8,000	4 1/4	1 1/2	<a href="#">16401-67-24</a>	40.00
16	5.00	9,000	5 1/4	1 1/4	<a href="#">16501-67-20</a>	72.00
16	5.00	9,000	5 1/4	1 1/2	<a href="#">16501-67-24</a>	72.00
18	5.00	9,000	5 1/4	1 1/4	<a href="#">18501-67-20</a>	90.00
18	5.00	9,000	5 1/4	1 1/2	<a href="#">18501-67-24</a>	90.00
20	5.00	10,500	5 1/4	1 1/4	<a href="#">20501-67-20</a>	110.00
20	5.00	10,500	5 1/4	1 1/2	<a href="#">20501-67-24</a>	110.00
20	5.00	10,500	5 1/4	2	<a href="#">20501-67-32</a>	110.00

CONTINUED

# WHEELS POLYURETHANE

## PRECISION TAPERED BEARING (Hard Poly - 70D)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	900	2 7/16	1/2	<a href="#">04209-63-08</a>	3.00
4	3.25	1,530	3 1/2	3/4	<a href="#">04329-63-12</a>	5.00
4	3.25	1,530	3 1/2	1	<a href="#">04329-63-16</a>	5.00
4	4.00	1,920	4 1/2	1	<a href="#">04409-63-16</a>	10.00
4	4.00	1,920	4 1/2	1 1/4	<a href="#">04409-63-20</a>	10.00
5	2.00	1,260	2 7/16	1/2	<a href="#">05209-63-08</a>	3.00
5	2.50	1,590	3 1/2	3/4	<a href="#">05259-63-12</a>	7.00
5	2.50	1,590	3 1/2	1	<a href="#">05259-63-16</a>	7.00
5	3.00	1,836	3 1/4	3/4	<a href="#">05309-63-12</a>	9.00
5	3.00	1,836	3 1/4	1	<a href="#">05309-63-16</a>	9.00
6	2.00	1,440	2 7/16	1/2	<a href="#">06209-63-08</a>	4.50
6	2.00	1,440	2 7/16	3/4	<a href="#">06209-63-12</a>	4.50
6	2.50	1,950	3 1/2	3/4	<a href="#">06259-63-12</a>	6.50
6	2.50	1,950	3 1/2	1	<a href="#">06259-63-16</a>	6.50
6	3.00	2,460	3 1/2	3/4	<a href="#">06309-63-12</a>	9.50
6	3.00	2,460	3 1/2	1	<a href="#">06309-63-16</a>	9.50
6	3.00	2,460	3 1/2	1 1/4	<a href="#">06309-63-20</a>	9.50
8	2.00	1,860	2 7/16	3/4	<a href="#">08209-63-12</a>	8.00
8	2.50	2,460	3 1/2	3/4	<a href="#">08259-63-12</a>	9.50
8	2.50	2,460	3 1/2	1	<a href="#">08259-63-16</a>	9.50
8	3.00	3,000	3 1/2	3/4	<a href="#">08309-63-12</a>	12.50
8	3.00	3,000	3 1/2	1	<a href="#">08309-63-16</a>	12.50
8	3.00	3,000	3 1/2	1 1/4	<a href="#">08309-63-20</a>	12.50
8	4.00	4,560	4 1/2	1	<a href="#">08409-63-16</a>	20.00
8	4.00	4,560	4 1/2	1 1/4	<a href="#">08409-63-20</a>	20.00
10	3.00	3,600	3 1/2	3/4	<a href="#">10309-63-12</a>	16.00
10	3.00	3,600	3 1/2	1	<a href="#">10309-63-16</a>	16.00
10	3.00	3,600	3 1/2	1 1/4	<a href="#">10309-63-20</a>	16.00
10	4.00	5,040	4 1/2	1	<a href="#">10409-63-16</a>	23.00
10	4.00	5,040	4 1/2	1 1/4	<a href="#">10409-63-20</a>	23.00
12	3.00	4,200	3 1/2	3/4	<a href="#">12309-63-12</a>	21.00
12	3.00	4,200	3 1/2	1	<a href="#">12309-63-16</a>	21.00
12	3.00	4,200	3 1/2	1 1/4	<a href="#">12309-63-20</a>	21.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## PRECISION TAPERED BEARING (Hard Poly - 70D - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	2,950	3 1/2	3/4	<a href="#">06309-67-12</a>	9.50
6	4.00	2,950	3 1/2	1	<a href="#">06309-67-16</a>	9.50
6	4.00	3,600	4 1/2	1	<a href="#">06409-67-16</a>	17.00
6	4.00	3,600	4 1/2	1 1/4	<a href="#">06409-67-20</a>	17.00
6	5.00	4,400	5 1/2	1	<a href="#">06509-67-16</a>	20.00
6	5.00	4,400	5 1/2	1 1/4	<a href="#">06509-67-20</a>	20.00
8	3.00	3,500	3 1/2	3/4	<a href="#">08309-67-12</a>	17.00
8	3.00	3,500	3 1/2	1	<a href="#">08309-67-16</a>	17.00
10	3.00	4,440	3 1/2	3/4	<a href="#">10309-67-12</a>	24.00
10	3.00	4,440	3 1/2	1	<a href="#">10309-67-16</a>	24.00
10	3.00	4,440	3 1/2	1 1/4	<a href="#">10309-67-20</a>	24.00
10	4.00	6,000	4 1/2	1	<a href="#">10409-67-16</a>	33.00
10	4.00	6,000	4 1/2	1 1/4	<a href="#">10409-67-20</a>	33.00
12	3.00	4,620	3 1/2	1	<a href="#">12309-67-16</a>	24.00
12	3.00	4,620	3 1/2	1 1/4	<a href="#">12309-67-20</a>	24.00
12	4.00	6,600	4 1/2	1	<a href="#">12409-67-16</a>	30.00
12	4.00	6,600	4 1/2	1 1/4	<a href="#">12409-67-20</a>	30.00
12	5.00	7,800	5 1/2	1	<a href="#">12509-67-16</a>	45.00
12	5.00	7,800	5 1/2	1 1/4	<a href="#">12509-67-20</a>	45.00
16	4.00	8,000	4 1/2	1	<a href="#">16409-67-16</a>	40.00
16	4.00	8,000	4 1/2	1 1/4	<a href="#">16409-67-20</a>	40.00
16	5.00	9,000	5 1/2	1	<a href="#">16509-67-16</a>	72.00
16	5.00	9,000	5 1/2	1 1/4	<a href="#">16509-67-20</a>	72.00
18	5.00	9,000	5 1/2	1	<a href="#">18509-67-16</a>	90.00
18	5.00	9,000	5 1/2	1 1/4	<a href="#">18509-67-20</a>	90.00
20	5.00	10,500	5 1/2	1	<a href="#">20509-67-16</a>	110.00
20	5.00	10,500	5 1/2	1 1/4	<a href="#">20509-67-20</a>	110.00
20	5.00	10,500	5 1/2	1 1/2	<a href="#">20509-67-24</a>	110.00
20	5.00	10,500	5 1/2	2	<a href="#">20509-67-32</a>	110.00

CONTINUED

# WHEELS POLYURETHANE

## BEARINGLESS (Hard Poly - 70D)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	900	2 3/16	1 3/16	<a href="#">04200-63-19</a>	3.00
4	3.25	1,530	3 1/4	1 15/16	<a href="#">04320-63-31</a>	5.00
4	4.00	1,920	4 1/4	2 7/16	<a href="#">04400-63-39</a>	10.00
5	2.00	1,260	2 3/16	1 3/16	<a href="#">05200-63-19</a>	3.00
5	2.50	1,590	3 1/4	1 15/16	<a href="#">05250-63-31</a>	7.00
5	3.00	1,836	3 1/4	1 15/16	<a href="#">05300-63-31</a>	9.00
6	2.00	1,440	2 3/16	1 1/5	<a href="#">06200-63-19</a>	4.50
6	2.50	1,950	3 1/4	1 15/16	<a href="#">06250-63-31</a>	6.50
6	3.00	2,460	3 1/4	1 15/16	<a href="#">06300-63-31</a>	9.50
8	2.00	1,860	2 3/16	1 3/16	<a href="#">08200-63-19</a>	8.00
8	2.50	2,460	3 1/4	1 15/16	<a href="#">08250-63-31</a>	9.50
8	3.00	3,000	3 1/4	1 15/16	<a href="#">08300-63-31</a>	12.50
8	4.00	4,560	4 1/4	2 7/16	<a href="#">08400-63-39</a>	20.00
10	3.00	3,600	3 1/4	1 8/9	<a href="#">10300-63-31</a>	16.00
10	4.00	5,040	4 1/4	2 7/16	<a href="#">10400-63-39</a>	23.00
12	3.00	4,200	3 1/4	1 15/16	<a href="#">12300-63-31</a>	21.00

## BEARINGLESS (Hard Poly - 70D - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	2,950	3 1/4	1 15/16	<a href="#">06300-67-31</a>	9.50
6	4.00	3,600	4 1/4	2 7/16	<a href="#">06400-67-39</a>	17.00
6	5.00	4,400	5 1/4	2 7/16	<a href="#">06500-67-39</a>	20.00
8	3.00	3,500	3 1/4	1 15/16	<a href="#">08300-67-31</a>	17.00
10	3.00	4,440	3 1/4	2 7/16	<a href="#">10300-67-39</a>	24.00
10	3.00	4,400	3 1/4	1 15/16	<a href="#">10300-67-31</a>	24.00
10	4.00	6,000	4 1/4	2 7/16	<a href="#">10400-67-39</a>	33.00
10	5.00	7,200	5 1/4	2 7/16	<a href="#">10500-67-39</a>	45.00
12	3.00	4,620	3 1/4	2 7/16	<a href="#">12300-67-39</a>	24.00
12	4.00	6,600	4 1/4	2 7/16	<a href="#">12400-67-39</a>	30.00
12	5.00	7,800	5 1/4	2 7/16	<a href="#">12500-67-39</a>	45.00
16	4.00	8,000	4 1/4	2 7/16	<a href="#">16400-67-39</a>	40.00
16	5.00	9,000	5 1/4	2 7/16	<a href="#">16500-67-39</a>	72.00
18	5.00	9,000	5 1/4	2 7/16	<a href="#">18500-67-39</a>	90.00
20	5.00	10,500	5 1/4	2 7/16	<a href="#">20500-67-39</a>	110.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## PRECISION BALL BEARING (Hard Poly - 70D)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	2.00	1,440	2 7/16	1/2	<a href="#">06202-63-08</a>	4.50
6	3.00	2,460	3 1/2	3/4	<a href="#">06302-63-12</a>	9.50
8	2.00	1,860	2 7/16	1/2	<a href="#">08202-63-08</a>	8.00
8	3.00	3,000	3 1/2	3/4	<a href="#">08302-63-12</a>	12.50
8	3.00	3,000	3 1/2	1	<a href="#">08302-63-16</a>	12.50
10	3.00	3,600	3 1/2	3/4	<a href="#">10302-63-12</a>	16.00
10	3.00	3,600	3 1/2	1	<a href="#">10302-63-16</a>	16.00
12	3.00	3,540	3 1/2	3/4	<a href="#">12302-63-12</a>	21.00
12	3.00	3,720	3 1/2	1	<a href="#">12302-63-16</a>	21.00

## PRECISION BALL BEARING (Hard Poly - 70D - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	1,200	2 7/16	1/2	<a href="#">04202-67-08</a>	3.00

## PRECISION BALL BEARING (Hard Poly - Round Tread - 70D)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	700	2 7/16	1/2	<a href="#">04202-53-08</a>	3.00
6	2.00	1,200	2 7/16	1/2	<a href="#">06202-53-08</a>	4.00
8	2.00	1,500	2 7/16	1/2	<a href="#">08202-53-08</a>	5.50



BALLOON  
ROUND TREAD

CONTINUED

# WHEELS POLYURETHANE

## STRAIGHT ROLLER BEARING (HPPT Poly - 92A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	1,100	2 3/16	3/4	<a href="#">04201-90-12</a>	3.00
4	3.25	1,750	3 1/4	1	<a href="#">04321-90-16</a>	5.00
4	3.25	1,750	3 1/4	1 1/4	<a href="#">04321-90-20</a>	5.00
4	4.00	2,100	4 1/4	1 1/4	<a href="#">04401-90-20</a>	10.00
4	4.00	2,100	4 1/4	1 1/2	<a href="#">04401-90-24</a>	10.00
5	2.00	1,300	2 3/16	3/4	<a href="#">05201-90-12</a>	3.00
5	2.50	1,600	3 1/4	1	<a href="#">05251-90-16</a>	7.00
5	2.50	1,600	3 1/4	1 1/4	<a href="#">05251-90-20</a>	7.00
5	3.00	1,950	3 1/4	1	<a href="#">05301-90-16</a>	9.00
5	3.00	1,950	3 1/4	1 1/4	<a href="#">05301-90-20</a>	9.00
6	2.00	1,525	2 3/16	3/4	<a href="#">06201-90-12</a>	4.50
6	2.50	1,925	3 1/4	1	<a href="#">06251-90-16</a>	6.50
6	2.50	1,925	3 1/4	1 1/4	<a href="#">06251-90-20</a>	6.50
6	3.00	2,300	3 1/4	1	<a href="#">06301-90-16</a>	9.50
6	3.00	2,300	3 1/4	1 1/4	<a href="#">06301-90-20</a>	9.50
8	2.00	2,050	2 3/16	3/4	<a href="#">08201-90-12</a>	8.00
8	2.50	2,575	3 1/4	1	<a href="#">08251-90-16</a>	9.50
8	2.50	2,575	3 1/4	1 1/4	<a href="#">08251-90-20</a>	9.50
8	3.00	3,100	3 1/4	1	<a href="#">08301-90-16</a>	12.50
8	3.00	3,100	3 1/4	1 1/4	<a href="#">08301-90-20</a>	12.50
8	4.00	4,100	4 1/4	1 1/4	<a href="#">08401-90-20</a>	20.00
8	4.00	4,100	4 1/4	1 1/2	<a href="#">08401-90-24</a>	20.00
10	3.00	3,450	3 1/4	1	<a href="#">10301-90-16</a>	16.00
10	3.00	3,450	3 1/4	1 1/4	<a href="#">10301-90-20</a>	16.00
10	4.00	4,600	4 1/4	1 1/4	<a href="#">10401-90-20</a>	23.00
10	4.00	4,600	4 1/4	1 1/2	<a href="#">10401-90-24</a>	23.00
12	3.00	3,800	3 1/4	1	<a href="#">12301-90-16</a>	21.00
12	3.00	3,800	3 1/4	1 1/4	<a href="#">12301-90-20</a>	21.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## STRAIGHT ROLLER BEARING (HPPT Poly - 92A - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	3,600	3 1/4	1	<a href="#">06301-95-16</a>	9.50
6	3.00	3,600	3 1/4	1 1/4	<a href="#">06301-95-20</a>	9.50
6	4.00	4,600	4 1/4	1 1/4	<a href="#">06401-95-20</a>	17.00
6	4.00	4,600	4 1/4	1 1/2	<a href="#">06401-95-24</a>	17.00
6	5.00	5,800	5 1/4	1 1/4	<a href="#">06501-95-20</a>	20.00
6	5.00	5,800	5 1/4	1 1/2	<a href="#">06501-95-24</a>	20.00
8	3.00	4,300	3 1/4	1	<a href="#">08301-95-16</a>	17.00
8	3.00	4,300	3 1/4	1 1/4	<a href="#">08301-95-20</a>	17.00
10	3.00	4,800	3 1/4	1	<a href="#">10301-95-16</a>	24.00
10	3.00	4,800	3 1/4	1 1/4	<a href="#">10301-95-20</a>	24.00
10	3.00	4,800	3 1/4	1 1/2	<a href="#">10301-98-24</a>	24.00
10	4.00	6,500	4 1/4	1 1/4	<a href="#">10401-95-20</a>	33.00
10	4.00	6,500	4 1/4	1 1/2	<a href="#">10401-95-24</a>	33.00
10	5.00	7,900	5 1/4	1 1/4	<a href="#">10501-95-20</a>	45.00
12	3.00	5,250	3 1/4	1 1/4	<a href="#">12301-95-20</a>	24.00
12	3.00	5,250	3 1/4	1 1/2	<a href="#">12301-95-24</a>	24.00
12	4.00	7,000	4 1/4	1 1/4	<a href="#">12401-95-20</a>	30.00
12	4.00	7,000	4 1/4	1 1/2	<a href="#">12401-95-24</a>	30.00
12	5.00	8,400	5 1/4	1 1/4	<a href="#">12501-95-20</a>	45.00
12	5.00	8,400	5 1/4	1 1/2	<a href="#">12501-95-24</a>	45.00
16	4.00	8,125	4 1/4	1 1/4	<a href="#">16401-95-20</a>	40.00
16	4.00	8,125	4 1/4	1 1/2	<a href="#">16401-95-24</a>	40.00
16	5.00	9,125	5 1/4	1 1/4	<a href="#">16501-95-20</a>	72.00
16	5.00	9,125	5 1/4	1 1/2	<a href="#">16501-95-24</a>	72.00
18	5.00	9,500	5 1/4	1 1/4	<a href="#">18501-95-20</a>	90.00
18	5.00	9,500	5 1/4	1 1/2	<a href="#">18501-95-24</a>	90.00
20	5.00	11,250	5 1/4	1 1/4	<a href="#">20501-95-20</a>	110.00
20	5.00	11,250	5 1/4	1 1/2	<a href="#">20501-95-24</a>	110.00
20	5.00	11,250	5 1/4	2	<a href="#">20501-95-32</a>	110.00

CONTINUED

# WHEELS POLYURETHANE

## PRECISION TAPERED BEARING (HPPT Poly - 92A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	1,100	2 7/16	1/2	<a href="#">04209-90-08</a>	3.00
4	3.25	1,750	3 1/2	3/4	<a href="#">04329-90-12</a>	5.00
4	3.25	1,750	3 1/2	1	<a href="#">04329-90-16</a>	5.00
4	4.00	2,100	4 1/2	1	<a href="#">04409-90-16</a>	10.00
4	4.00	2,100	4 1/2	1 1/4	<a href="#">04409-90-20</a>	10.00
5	2.00	1,300	2 7/16	1/2	<a href="#">05209-90-08</a>	3.00
5	2.50	1,600	3 1/2	3/4	<a href="#">05259-90-12</a>	7.00
5	2.50	1,600	3 1/2	1	<a href="#">05259-90-16</a>	7.00
5	3.00	1,950	3 1/4	3/4	<a href="#">05309-90-12</a>	9.00
5	3.00	1,950	3 1/4	1	<a href="#">05309-90-16</a>	9.00
6	2.00	1,525	2 7/16	1/2	<a href="#">06209-90-08</a>	4.50
6	2.00	1,525	2 7/16	3/4	<a href="#">06209-90-12</a>	4.50
6	2.50	1,925	3 1/2	3/4	<a href="#">06259-90-12</a>	6.50
6	2.50	1,925	3 1/2	1	<a href="#">06259-90-16</a>	6.50
6	3.00	2,300	3 1/2	3/4	<a href="#">06309-90-12</a>	9.50
6	3.00	2,300	3 1/2	1	<a href="#">06309-90-16</a>	9.50
6	3.00	2,300	3 1/2	1 1/4	<a href="#">06309-90-20</a>	9.50
8	2.00	2,050	2 7/16	3/4	<a href="#">08209-90-12</a>	8.00
8	2.50	2,575	3 1/2	3/4	<a href="#">08259-90-12</a>	9.50
8	2.50	2,575	3 1/2	1	<a href="#">08259-90-16</a>	9.50
8	3.00	3,100	3 1/2	3/4	<a href="#">08309-90-12</a>	12.50
8	3.00	3,100	3 1/2	1	<a href="#">08309-90-16</a>	12.50
8	3.00	3,100	3 1/2	1 1/4	<a href="#">08309-90-20</a>	12.50
8	4.00	4,100	4 1/2	1	<a href="#">08409-90-16</a>	20.00
8	4.00	4,100	4 1/2	1 1/4	<a href="#">08409-90-20</a>	20.00
10	3.00	3,450	3 1/2	3/4	<a href="#">10309-90-12</a>	16.00
10	3.00	3,450	3 1/2	1	<a href="#">10309-90-16</a>	16.00
10	3.00	3,450	3 1/2	1 1/4	<a href="#">10309-90-20</a>	16.00
10	4.00	4,600	4 1/2	1	<a href="#">10409-90-16</a>	23.00
10	4.00	4,600	4 1/2	1 1/4	<a href="#">10409-90-20</a>	23.00
12	3.00	3,800	3 1/2	3/4	<a href="#">12309-90-12</a>	21.00
12	3.00	3,800	3 1/2	1	<a href="#">12309-90-16</a>	21.00
12	3.00	3,800	3 1/2	1 1/4	<a href="#">12309-90-20</a>	21.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## PRECISION TAPERED BEARING (HPPT Poly - 92A - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	3,600	3 1/2	3/4	<a href="#">06309-95-12</a>	9.50
6	4.00	3,600	3 1/2	1	<a href="#">06309-95-16</a>	9.50
6	4.00	4,600	4 1/2	1	<a href="#">06409-95-16</a>	17.00
6	4.00	4,600	4 1/2	1 1/4	<a href="#">06409-95-20</a>	17.00
6	5.00	5,800	5 1/2	1	<a href="#">06509-95-16</a>	20.00
6	5.00	5,800	5 1/2	1 1/4	<a href="#">06509-95-20</a>	20.00
8	3.00	4,300	3 1/2	3/4	<a href="#">08309-95-12</a>	17.00
8	3.00	4,300	3 1/2	1	<a href="#">08309-95-16</a>	17.00
10	3.00	4,800	3 1/2	3/4	<a href="#">10309-95-12</a>	24.00
10	3.00	4,800	3 1/2	1	<a href="#">10309-95-16</a>	24.00
10	3.00	4,800	3 1/2	1 1/4	<a href="#">10309-98-20</a>	24.00
10	4.00	6,500	4 1/2	1	<a href="#">10409-95-16</a>	33.00
10	4.00	6,500	4 1/2	1 1/4	<a href="#">10409-95-20</a>	33.00
12	3.00	5,250	3 1/2	1	<a href="#">12309-95-16</a>	24.00
12	3.00	5,250	3 1/2	1 1/4	<a href="#">12309-95-20</a>	24.00
12	4.00	7,000	4 1/2	1	<a href="#">12409-95-16</a>	30.00
12	4.00	7,000	4 1/2	1 1/4	<a href="#">12409-95-20</a>	30.00
12	5.00	8,400	5 1/2	1	<a href="#">12509-95-16</a>	45.00
12	5.00	8,400	5 1/2	1 1/4	<a href="#">12509-95-20</a>	45.00
16	4.00	8,125	4 1/2	1	<a href="#">16409-95-16</a>	40.00
16	4.00	8,125	4 1/2	1 1/4	<a href="#">16409-95-20</a>	40.00
16	5.00	9,125	5 1/2	1	<a href="#">16509-95-16</a>	72.00
16	5.00	9,125	5 1/2	1 1/4	<a href="#">16509-95-20</a>	72.00
18	5.00	9,500	5 1/2	1	<a href="#">18509-95-16</a>	90.00
18	5.00	9,500	5 1/2	1 1/4	<a href="#">18509-95-20</a>	90.00
20	5.00	11,250	5 1/2	1	<a href="#">20509-95-16</a>	110.00
20	5.00	11,250	5 1/2	1 1/4	<a href="#">20509-95-20</a>	110.00
20	5.00	11,250	5 1/2	1 1/2	<a href="#">20509-95-24</a>	110.00
20	5.00	11,250	5 1/2	2	<a href="#">20509-95-32</a>	110.00

CONTINUED

# WHEELS POLYURETHANE

## BEARINGLESS (HPPT Poly - 92A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	1,100	2 3/16	1 3/16	<a href="#">04200-90-19</a>	3.00
4	3.25	1,750	3 1/4	1 15/16	<a href="#">04320-90-31</a>	5.00
4	4.00	2,100	4 1/4	2 7/16	<a href="#">04400-90-39</a>	10.00
5	2.00	1,300	2 3/16	1 3/16	<a href="#">05200-90-19</a>	3.00
5	2.50	1,600	3 1/4	1 15/16	<a href="#">05250-90-31</a>	7.00
5	3.00	1,950	3 1/4	1 15/16	<a href="#">05300-90-31</a>	9.00
6	2.00	1,525	2 3/16	1 1/5	<a href="#">06200-90-19</a>	4.50
6	2.50	1,925	3 1/4	1 15/16	<a href="#">06250-90-31</a>	6.50
6	3.00	2,300	3 1/4	1 15/16	<a href="#">06300-90-31</a>	9.50
8	2.00	2,050	2 3/16	1 3/16	<a href="#">08200-90-19</a>	8.00
8	2.50	2,575	3 1/4	1 15/16	<a href="#">08250-90-31</a>	9.50
8	3.00	3,100	3 1/4	1 15/16	<a href="#">08300-90-31</a>	12.50
8	4.00	4,100	4 1/4	2 7/16	<a href="#">08400-90-39</a>	20.00
10	3.00	3,450	3 1/4	1 8/9	<a href="#">10300-90-31</a>	16.00
10	4.00	4,600	4 1/4	2 7/16	<a href="#">10400-90-39</a>	23.00
12	3.00	3,800	3 1/4	1 15/16	<a href="#">12300-90-31</a>	21.00

## BEARINGLESS (HPPT Poly - 92A - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	3,600	3 1/4	1 15/16	<a href="#">06300-95-31</a>	9.50
6	4.00	4,600	4 1/4	2 7/16	<a href="#">06400-95-39</a>	17.00
6	5.00	5,800	5 1/4	2 7/16	<a href="#">06500-95-39</a>	20.00
8	3.00	4,300	3 1/4	1 15/16	<a href="#">08300-95-31</a>	17.00
10	3.00	4,800	3 1/4	2 7/16	<a href="#">10300-98-39</a>	24.00
10	3.00	4,800	3 1/4	1 15/16	<a href="#">10300-95-31</a>	24.00
10	4.00	6,500	4 1/4	2 7/16	<a href="#">10400-95-39</a>	33.00
10	5.00	7,900	5 1/4	2 7/16	<a href="#">10500-95-39</a>	45.00
12	3.00	5,250	3 1/4	2 7/16	<a href="#">12300-95-39</a>	24.00
12	4.00	7,000	4 1/4	2 7/16	<a href="#">12400-95-39</a>	30.00
12	5.00	8,400	5 1/4	2 7/16	<a href="#">12500-95-39</a>	45.00
16	4.00	8,125	4 1/4	2 7/16	<a href="#">16400-95-39</a>	40.00
16	5.00	9,125	5 1/4	2 7/16	<a href="#">16500-95-39</a>	72.00
18	5.00	9,500	5 1/4	2 7/16	<a href="#">18500-95-39</a>	90.00
20	5.00	11,250	5 1/4	2 7/16	<a href="#">20500-95-39</a>	110.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## PRECISION BALL BEARING (HPPT Poly - 92A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
5	2.00	1,300	2 7/16	1/2	<a href="#">05202-90-08</a>	3.00
6	2.00	1,525	2 7/16	1/2	<a href="#">06202-90-08</a>	4.50
6	3.00	2,300	3 1/2	3/4	<a href="#">06302-90-12</a>	9.50
8	2.00	2,050	2 7/16	1/2	<a href="#">08202-90-08</a>	8.00
8	2.50	2,575	3 1/2	3/4	<a href="#">08252-90-12</a>	9.50
8	3.00	3,100	3 1/2	3/4	<a href="#">08302-90-12</a>	12.50
8	3.00	3,100	3 1/2	1	<a href="#">08302-90-16</a>	12.50
10	3.00	3,450	3 1/2	3/4	<a href="#">10302-90-12</a>	16.00
10	3.00	3,450	3 1/2	1	<a href="#">10302-90-16</a>	16.00
12	3.00	3,540	3 1/2	3/4	<a href="#">12302-90-12</a>	21.00
12	3.00	3,720	3 1/2	1	<a href="#">12302-90-16</a>	21.00
12	3.00	3,800	3 1/2	1 1/4	<a href="#">12302-90-20</a>	21.00

## PRECISION BALL BEARING (HPPT Poly - 92A - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	1,400	2 7/16	1/2	<a href="#">04202-95-08</a>	3.00

## PRECISION BALL BEARING (HPPT Poly - Round Tread - 92A)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
12	1.75	1,900	3 1/2	3/4	<a href="#">12172-90-12</a>	18.00



BALLOON  
ROUND TREAD

CONTINUED

# WHEELS POLYURETHANE

## STRAIGHT ROLLER BEARING (T/R-95)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	1,000	2 3/16	3/4	<a href="#">04201-91-12</a>	3.00
4	3.25	1,575	3 1/4	1	<a href="#">04321-91-16</a>	5.00
4	3.25	1,575	3 1/4	1 1/4	<a href="#">04321-91-20</a>	5.00
4	4.00	1,890	4 1/4	1 1/4	<a href="#">04401-91-20</a>	10.00
4	4.00	1,890	4 1/4	1 1/2	<a href="#">04401-91-24</a>	10.00
5	2.00	1,170	2 3/16	3/4	<a href="#">05201-91-12</a>	3.00
5	2.50	1,440	3 1/4	1	<a href="#">05251-91-16</a>	7.00
5	2.50	1,440	3 1/4	1 1/4	<a href="#">05251-91-20</a>	7.00
5	3.00	1,755	3 1/4	1	<a href="#">05301-91-16</a>	9.00
5	3.00	1,755	3 1/4	1 1/4	<a href="#">05301-91-20</a>	9.00
6	2.00	1,400	2 3/16	3/4	<a href="#">06201-91-12</a>	4.50
6	2.50	1,800	3 1/4	1	<a href="#">06251-91-16</a>	6.50
6	2.50	1,800	3 1/4	1 1/4	<a href="#">06251-91-20</a>	6.50
6	3.00	2,070	3 1/4	1	<a href="#">06301-91-16</a>	9.50
6	3.00	2,070	3 1/4	1 1/4	<a href="#">06301-91-20</a>	9.50
8	2.00	1,800	2 3/16	3/4	<a href="#">08201-91-12</a>	8.00
8	2.50	2,300	3 1/4	1	<a href="#">08251-91-16</a>	9.50
8	2.50	2,300	3 1/4	1 1/4	<a href="#">08251-91-20</a>	9.50
8	3.00	2,800	3 1/4	1	<a href="#">08301-91-16</a>	12.50
8	3.00	2,800	3 1/4	1 1/4	<a href="#">08301-91-20</a>	12.50
8	4.00	3,700	4 1/4	1 1/4	<a href="#">08401-91-20</a>	20.00
8	4.00	3,700	4 1/4	1 1/2	<a href="#">08401-91-24</a>	20.00
10	3.00	3,100	3 1/4	1	<a href="#">10301-91-16</a>	16.00
10	3.00	3,100	3 1/4	1 1/4	<a href="#">10301-91-20</a>	16.00
10	4.00	4,140	4 1/4	1 1/4	<a href="#">10401-91-20</a>	23.00
10	4.00	4,140	4 1/4	1 1/2	<a href="#">10401-91-24</a>	23.00
12	3.00	3,400	3 1/4	1	<a href="#">12301-91-16</a>	21.00
12	3.00	3,400	3 1/4	1 1/4	<a href="#">12301-91-20</a>	21.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## STRAIGHT ROLLER BEARING (T/R-95 - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	3,240	3 1/4	1	<a href="#">06301-96-16</a>	9.50
6	3.00	3,240	3 1/4	1 1/4	<a href="#">06301-96-20</a>	9.50
6	4.00	4,140	4 1/4	1 1/4	<a href="#">06401-96-20</a>	17.00
6	4.00	4,140	4 1/4	1 1/2	<a href="#">06401-96-24</a>	17.00
6	5.00	5,200	5 1/4	1 1/4	<a href="#">06501-96-20</a>	20.00
6	5.00	5,200	5 1/4	1 1/2	<a href="#">06501-96-24</a>	20.00
8	3.00	3,900	3 1/4	1	<a href="#">08301-96-16</a>	17.00
8	3.00	3,900	3 1/4	1 1/4	<a href="#">08301-96-20</a>	17.00
10	3.00	4,300	3 1/4	1	<a href="#">10301-96-16</a>	24.00
10	3.00	4,300	3 1/4	1 1/4	<a href="#">10301-96-20</a>	24.00
10	3.00	4,300	3 1/4	1 1/2	<a href="#">10301-96-24</a>	24.00
10	4.00	5,850	4 1/4	1 1/4	<a href="#">10401-96-20</a>	33.00
10	4.00	5,850	4 1/4	1 1/2	<a href="#">10401-96-24</a>	33.00
10	5.00	7,100	5 1/4	1 1/4	<a href="#">10501-96-20</a>	45.00
12	3.00	4,725	3 1/4	1 1/4	<a href="#">12301-96-20</a>	24.00
12	3.00	4,725	3 1/4	1 1/2	<a href="#">12301-96-24</a>	24.00
12	4.00	6,300	4 1/4	1 1/4	<a href="#">12401-96-20</a>	30.00
12	4.00	6,300	4 1/4	1 1/2	<a href="#">12401-96-24</a>	30.00
12	5.00	7,560	5 1/4	1 1/4	<a href="#">12501-96-20</a>	45.00
12	5.00	7,560	5 1/4	1 1/2	<a href="#">12501-96-24</a>	45.00
16	4.00	7,300	4 1/4	1 1/4	<a href="#">16401-96-20</a>	40.00
16	4.00	7,300	4 1/4	1 1/2	<a href="#">16401-96-24</a>	40.00
16	5.00	8,200	5 1/4	1 1/4	<a href="#">16501-96-20</a>	72.00
16	5.00	8,200	5 1/4	1 1/2	<a href="#">16501-96-24</a>	72.00
18	5.00	8,550	5 1/4	1 1/4	<a href="#">18501-96-20</a>	90.00
18	5.00	8,550	5 1/4	1 1/2	<a href="#">18501-96-24</a>	90.00
20	5.00	10,125	5 1/4	1 1/4	<a href="#">20501-96-20</a>	110.00
20	5.00	10,125	5 1/4	1 1/2	<a href="#">20501-96-24</a>	110.00
20	5.00	10,125	5 1/4	2	<a href="#">20501-96-32</a>	110.00

CONTINUED

# WHEELS POLYURETHANE

## PRECISION TAPERED BEARING (T/R-95)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	1,000	2 7/16	1/2	<a href="#">04209-91-08</a>	3.00
4	3.25	1,575	3 1/2	3/4	<a href="#">04329-91-12</a>	5.00
4	3.25	1,575	3 1/2	1	<a href="#">04329-91-16</a>	5.00
4	4.00	1,890	4 1/2	1	<a href="#">04409-91-16</a>	10.00
4	4.00	1,890	4 1/2	1 1/4	<a href="#">04409-91-20</a>	10.00
5	2.00	1,170	2 7/16	1/2	<a href="#">05209-91-08</a>	3.00
5	2.50	1,440	3 1/2	3/4	<a href="#">05259-91-12</a>	7.00
5	2.50	1,440	3 1/2	1	<a href="#">05259-91-16</a>	7.00
5	3.00	1,755	3 1/4	3/4	<a href="#">05309-91-12</a>	9.00
5	3.00	1,755	3 1/4	1	<a href="#">05309-91-16</a>	9.00
6	2.00	1,400	2 7/16	1/2	<a href="#">06209-91-08</a>	4.50
6	2.00	1,400	2 7/16	3/4	<a href="#">06209-91-12</a>	4.50
6	2.50	1,800	3 1/2	3/4	<a href="#">06259-91-12</a>	6.50
6	2.50	1,800	3 1/2	1	<a href="#">06259-91-16</a>	6.50
6	3.00	2,070	3 1/2	3/4	<a href="#">06309-91-12</a>	9.50
6	3.00	2,070	3 1/2	1	<a href="#">06309-91-16</a>	9.50
6	3.00	2,070	3 1/2	1 1/4	<a href="#">06309-91-20</a>	9.50
8	2.00	1,800	2 7/16	3/4	<a href="#">08209-91-12</a>	8.00
8	2.50	2,300	3 1/2	3/4	<a href="#">08259-91-12</a>	9.50
8	2.50	2,300	3 1/2	1	<a href="#">08259-91-16</a>	9.50
8	3.00	2,800	3 1/2	3/4	<a href="#">08309-91-12</a>	12.50
8	3.00	2,800	3 1/2	1	<a href="#">08309-91-16</a>	12.50
8	3.00	2,800	3 1/2	1 1/4	<a href="#">08309-91-20</a>	12.50
8	4.00	3,700	4 1/2	1	<a href="#">08409-91-19</a>	20.00
8	4.00	3,700	4 1/2	1 1/4	<a href="#">08409-91-20</a>	20.00
10	3.00	3,100	3 1/2	3/4	<a href="#">10309-91-12</a>	16.00
10	3.00	3,100	3 1/2	1	<a href="#">10309-91-16</a>	16.00
10	3.00	3,100	3 1/2	1 1/4	<a href="#">10309-91-20</a>	16.00
10	4.00	4,140	4 1/2	1	<a href="#">10409-91-16</a>	23.00
10	4.00	4,140	4 1/2	1 1/4	<a href="#">10409-91-20</a>	23.00
12	3.00	3,400	3 1/2	3/4	<a href="#">12309-91-12</a>	21.00
12	3.00	3,400	3 1/2	1	<a href="#">12309-91-16</a>	21.00
12	3.00	3,400	3 1/2	1 1/4	<a href="#">12309-91-20</a>	21.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## PRECISION TAPERED BEARING (T/R-95 - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	3,240	3 1/2	3/4	<a href="#">06309-96-12</a>	9.50
6	4.00	3,240	3 1/2	1	<a href="#">06309-96-16</a>	9.50
6	4.00	4,140	4 1/2	1	<a href="#">06409-96-16</a>	17.00
6	4.00	4,140	4 1/2	1 1/4	<a href="#">06409-96-20</a>	17.00
6	5.00	5,200	5 1/2	1	<a href="#">06509-96-16</a>	20.00
6	5.00	5,200	5 1/2	1 1/4	<a href="#">06509-96-20</a>	20.00
8	3.00	3,900	3 1/2	3/4	<a href="#">08309-96-12</a>	17.00
8	3.00	3,900	3 1/2	1	<a href="#">08309-96-16</a>	17.00
10	3.00	4,300	3 1/2	3/4	<a href="#">10309-96-12</a>	24.00
10	3.00	4,300	3 1/2	1	<a href="#">10309-96-16</a>	24.00
10	3.00	4,300	3 1/2	1 1/4	<a href="#">10309-96-20</a>	24.00
10	4.00	5,850	4 1/2	1	<a href="#">10409-96-16</a>	33.00
10	4.00	5,850	4 1/2	1 1/4	<a href="#">10409-96-20</a>	33.00
12	3.00	4,725	3 1/2	1	<a href="#">12309-96-16</a>	24.00
12	3.00	4,725	3 1/2	1 1/4	<a href="#">12309-96-20</a>	24.00
12	4.00	6,300	4 1/2	1	<a href="#">12409-96-16</a>	30.00
12	4.00	6,300	4 1/2	1 1/4	<a href="#">12409-96-20</a>	30.00
12	5.00	7,560	5 1/2	1	<a href="#">12509-96-16</a>	45.00
12	5.00	7,560	5 1/2	1 1/4	<a href="#">12509-96-20</a>	45.00
16	4.00	7,300	4 1/2	1	<a href="#">16409-96-16</a>	40.00
16	4.00	7,300	4 1/2	1 1/4	<a href="#">16409-96-20</a>	40.00
16	5.00	8,200	5 1/2	1	<a href="#">16509-96-16</a>	72.00
16	5.00	8,200	5 1/2	1 1/4	<a href="#">16509-96-20</a>	72.00
18	5.00	8,550	5 1/2	1	<a href="#">18509-96-16</a>	90.00
18	5.00	8,550	5 1/2	1 1/4	<a href="#">18509-96-20</a>	90.00
20	5.00	10,125	5 1/2	1	<a href="#">20509-96-16</a>	110.00
20	5.00	10,125	5 1/2	1 1/4	<a href="#">20509-96-20</a>	110.00
20	5.00	10,125	5 1/2	1 1/2	<a href="#">20509-96-24</a>	110.00
20	5.00	10,125	5 1/2	2	<a href="#">20509-96-32</a>	110.00

CONTINUED

# WHEELS POLYURETHANE

## BEARINGLESS (T/R-95)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	1,000	2 3/16	1 3/16	<a href="#">04200-91-19</a>	3.00
4	3.25	1,575	3 1/4	1 15/16	<a href="#">04320-91-31</a>	5.00
4	4.00	1,890	4 1/4	2 7/16	<a href="#">04400-91-39</a>	10.00
5	2.00	1,170	2 3/16	1 3/16	<a href="#">05200-91-19</a>	3.00
5	2.50	1,440	3 1/4	1 15/16	<a href="#">05250-91-31</a>	7.00
5	3.00	1,755	3 1/4	1 15/16	<a href="#">05300-91-31</a>	9.00
6	2.00	1,400	2 3/16	1 1/5	<a href="#">06200-91-19</a>	4.50
6	2.50	1,800	3 1/4	1 15/16	<a href="#">06250-91-31</a>	6.50
6	3.00	2,070	3 1/4	1 15/16	<a href="#">06300-91-31</a>	9.50
8	2.00	1,800	2 3/16	1 3/16	<a href="#">08200-91-19</a>	8.00
8	2.50	2,300	3 1/4	1 15/16	<a href="#">08250-91-31</a>	9.50
8	3.00	2,800	3 1/4	1 15/16	<a href="#">08300-91-31</a>	12.50
8	4.00	3,700	4 1/4	2 7/16	<a href="#">08400-91-39</a>	20.00
10	3.00	3,100	3 1/4	1 8/9	<a href="#">10300-91-31</a>	16.00
10	4.00	4,140	4 1/4	2 7/16	<a href="#">10400-91-39</a>	23.00
12	3.00	3,400	3 1/4	1 15/16	<a href="#">12300-91-31</a>	21.00

## BEARINGLESS (T/R-95 - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	3.00	3,240	3 1/4	1 15/16	<a href="#">06300-96-31</a>	9.50
6	4.00	4,140	4 1/4	2 7/16	<a href="#">06400-96-39</a>	17.00
6	5.00	5,200	5 1/4	2 7/16	<a href="#">06500-96-39</a>	20.00
8	3.00	3,900	3 1/4	1 15/16	<a href="#">08300-96-31</a>	17.00
10	3.00	4,300	3 1/4	2 7/16	<a href="#">10300-96-39</a>	24.00
10	3.00	4,300	3 1/4	1 15/16	<a href="#">10300-96-31</a>	24.00
10	4.00	5,850	4 1/4	2 7/16	<a href="#">10400-96-39</a>	33.00
10	5.00	7,100	5 1/4	2 7/16	<a href="#">10500-96-39</a>	45.00
12	3.00	4,725	3 1/4	2 7/16	<a href="#">12300-96-39</a>	24.00
12	4.00	6,300	4 1/4	2 7/16	<a href="#">12400-96-39</a>	30.00
12	5.00	7,560	5 1/4	2 7/16	<a href="#">12500-96-39</a>	45.00
16	4.00	7,300	4 1/4	2 7/16	<a href="#">16400-96-39</a>	40.00
16	5.00	8,200	5 1/4	2 7/16	<a href="#">16500-96-39</a>	72.00
18	5.00	8,550	5 1/4	2 7/16	<a href="#">18500-96-39</a>	90.00
20	5.00	10,125	5 1/4	2 7/16	<a href="#">20500-96-39</a>	110.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS POLYURETHANE

## PRECISION BALL BEARING (T/R-95 - 1" Thick Tread)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	1,260	2 7/16	1/2	<a href="#">04202-96-08</a>	3.00

## PRECISION BALL BEARING (Round Tread - T/R-95)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	600	2 7/16	1/2	<a href="#">04202-56-08</a>	3.00
6	2.00	1,100	2 7/16	1/2	<a href="#">06202-56-08</a>	4.00
8	2.00	1,400	2 7/16	1/2	<a href="#">08202-56-08</a>	5.50
12	1.75	1,600	3 1/2	3/4	<a href="#">12172-91-12</a>	18.00



BALLOON  
ROUND TREAD

## PRECISION BALL BEARING (Round Tread - ErgoTread Poly)

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
4	2.00	475	2 7/16	1/2	<a href="#">04202-43-08</a>	3.00
6	2.00	760	2 7/16	1/2	<a href="#">06202-43-08</a>	4.00
8	2.00	950	2 7/16	1/2	<a href="#">08202-43-08</a>	5.50



BALLOON  
ROUND TREAD

All dimensions are in inches. All weights are in pounds.



---

WHEELS  
**NYTEC-MD**

# WHEELS NYTEC-MD



MAXIMUM CAPACITY

**9,360** lbs.

## FEATURES

NyTec-MD is a nylon filled material which provides a high load capacity, floor protective wheel. Wheel capacities approach those of similar cast iron and steel wheels. NyTec-MD material is resistant to most harsh environments. The non-abrasive and vibration dampening material actually provides a quieter operation when compared to steel or cast iron wheels. When used in wet environments, plain bore NyTec-MD wheels can be used as the material is self lubricating. NyTec-MD wheels are offered with precision tapered, precision ball, and straight roller bearings. For special applications, contact the factory.

## APPLICATIONS

Caster Concepts' NyTec-MD materials are widely used as idlers and support wheels in many large turn table applications. They provide a high load capacity while also offering a material that will provide reduced noise when compared to steel.

## BENEFITS

NyTec-HS is a heat stabilized material which is suited for higher loads, with thermal stability up to 260 degrees Fahrenheit. This material is excellent in applications where continual use is necessary. Wheels manufactured in NyTec-HS material have been tested under load to 2 million revolutions and have shown little or no wear to the tread surface.

# WHEELS NYTEC-MD

## STRAIGHT ROLLER BEARING

Diameter	Width	Capacity	Hub Length	Bore	Part Number
3	2.19	1,560	2 7/16	1/2	<u>03201-39-12</u>
3	3.25	2,340	3 1/2	1	<u>03301-39-16*</u>
3	3.25	2,340	3 1/4	1 1/4	<u>03301-39-20</u>
4	2.19	2,080	2 7/16	1/2	<u>04201-39-12</u>
4	3.25	3,120	3 1/2	1	<u>04301-39-16*</u>
4	3.25	3,120	3 1/2	1 1/4	<u>04301-39-20*</u>
4	4.25	4,160	4 1/2	1 1/4	<u>04401-39-20*</u>
4	4.25	4,160	4 1/4	1 1/2	<u>04401-39-24</u>
6	2.19	3,120	2 7/16	1/2	<u>06201-39-12</u>
6	3.25	4,680	3 1/2	1	<u>06301-39-16*</u>
6	3.25	4,680	3 1/2	1 1/4	<u>06301-39-20*</u>
6	4.25	6,240	4 1/2	1 1/4	<u>06401-39-20*</u>
6	4.25	6,240	4 1/4	1 1/2	<u>06401-39-24</u>
6	5.25	7,800	5 1/2	1 1/4	<u>06501-39-20*</u>
6	5.25	7,800	5 1/4	1 1/2	<u>06501-39-24</u>
8	2.19	4,160	2 7/16	1/2	<u>08201-39-12</u>
8	3.25	6,240	3 1/2	1	<u>08301-39-16*</u>
8	3.25	6,240	3 1/2	1 1/4	<u>08301-39-20*</u>
8	4.25	8,320	4 1/2	1 1/4	<u>08401-39-20*</u>
8	4.25	8,320	4 1/4	1 1/2	<u>08401-39-24</u>
8	5.25	10,400	5 1/2	1 1/4	<u>08501-39-20*</u>
8	5.25	10,400	5 1/4	1 1/2	<u>08501-39-24</u>
10	3.25	7,800	3 1/2	1	<u>10301-39-16*</u>
10	3.25	7,800	3 1/2	1 1/4	<u>10301-39-20*</u>
10	4.25	10,400	4 1/2	1 1/4	<u>10401-39-20*</u>
10	4.25	10,400	4 1/4	1 1/2	<u>10401-39-24</u>
10	5.25	13,000	5 1/2	1 1/4	<u>10501-39-20*</u>
10	5.25	13,000	5 1/4	1 1/2	<u>10501-39-24</u>
12	3.25	11,440	3 1/2	1	<u>12301-39-16*</u>
12	3.25	11,440	3 1/2	1 1/4	<u>12301-39-20*</u>
12	4.25	12,480	3 1/2	1 1/4	<u>12401-39-20*</u>
12	4.25	12,480	3 1/4	1 1/2	<u>12401-39-24</u>
12	5.25	15,600	5 1/2	1 1/4	<u>12501-39-20*</u>
12	5.25	15,600	5 1/2	1 1/2	<u>12501-39-24</u>

\* These wheels have .25 shorter hub length.  
All dimensions are in inches. All weights are in pounds.

CONTINUED

# WHEELS NYTEC-MD

## PRECISION TAPERED BEARING

Diameter	Width	Capacity	Hub Length	Bore	Part Number
3	2.19	1,560	2 7/16	1/2	<a href="#">03209-39-08</a>
3	3.25	2,340	3 1/2	1	<a href="#">03309-39-16</a>
3	4.25	2,340	4 1/2	3/4	<a href="#">03409-39-12</a>
3	4.25	3,120	4 1/2	1	<a href="#">03409-39-16</a>
4	2.19	2,080	2 7/16	1/2	<a href="#">04209-39-08</a>
4	3.25	3,120	3 1/2	3/4	<a href="#">04309-39-12</a>
4	3.25	3,120	3 1/2	1	<a href="#">04309-39-16</a>
4	3.25	3,120	3 1/2	1 1/4	<a href="#">04309-39-20</a>
4	4.25	4,160	4 1/2	3/4	<a href="#">04409-39-12</a>
4	4.25	4,160	4 1/2	1	<a href="#">04409-39-16</a>
4	4.25	4,160	4 1/2	1 1/4	<a href="#">04409-39-20</a>
6	2.19	3,120	2 7/16	5 1/2	<a href="#">06209-39-08</a>
6	3.25	4,680	3 1/2	5 1/2	<a href="#">06309-39-12</a>
6	3.25	4,680	3 1/2	1	<a href="#">06309-39-16</a>
6	3.25	4,680	3 1/2	1 1/4	<a href="#">06309-39-20</a>
6	4.25	6,240	4 1/2	1	<a href="#">06409-39-16</a>
6	4.25	6,240	4 1/2	1 1/4	<a href="#">06409-39-20</a>
6	5.25	7,800	5 1/2	1	<a href="#">06509-39-16</a>
6	5.25	7,800	5 1/2	1 1/4	<a href="#">06509-39-20</a>
8	2.19	4,160	2 7/16	1/2	<a href="#">08209-39-08</a>
8	3.25	6,240	3 1/2	3/4	<a href="#">08309-39-12</a>
8	3.25	6,240	3 1/2	1	<a href="#">08309-39-16</a>
8	3.25	6,240	3 1/2	1 1/4	<a href="#">08309-39-20</a>
8	4.25	8,320	4 1/2	1	<a href="#">08409-39-16</a>
8	4.25	8,320	4 1/2	1 1/4	<a href="#">08409-39-20</a>
8	5.25	10,400	5 1/2	1	<a href="#">08509-39-16</a>
8	5.25	10,400	5 1/2	1 1/4	<a href="#">08509-39-20</a>
10	3.25	7,800	3 1/2	3/4	<a href="#">10309-39-12</a>
10	3.25	7,800	3 1/2	1	<a href="#">10309-39-16</a>
10	3.25	7,800	3 1/2	1 1/4	<a href="#">10309-39-20</a>
10	4.25	10,400	4 1/2	1	<a href="#">10409-39-16</a>
10	4.25	10,400	4 1/2	1 1/4	<a href="#">10409-39-20</a>
10	5.25	13,000	5 1/2	1	<a href="#">10509-39-16</a>
10	5.25	13,000	5 1/2	1 1/4	<a href="#">10509-39-20</a>

CONTINUED

# WHEELS NYTEC-MD

## PRECISION TAPERED BEARING

Diameter	Width	Capacity	Hub Length	Bore	Part Number
12	3.25	11,440	3 1/2	3/4	<a href="#">12309-39-12</a>
12	3.25	11,440	3 1/2	1	<a href="#">12309-39-16</a>
12	3.25	11,440	3 1/2	1 1/4	<a href="#">12309-39-20</a>
12	4.25	12,480	3 1/2	1	<a href="#">12409-39-16</a>
12	4.25	12,480	3 1/2	1 1/4	<a href="#">12409-39-20</a>
12	5.25	15,600	5 1/2	1	<a href="#">12509-39-16</a>
12	5.25	15,600	5 1/2	1 1/4	<a href="#">12509-39-20</a>
12	6.25	18,720	6 1/2	1	<a href="#">12609-39-16</a>
12	6.25	18,720	6 1/2	1 1/4	<a href="#">12609-39-20</a>

## PRECISION BALL BEARING

Diameter	Width	Capacity	Hub Length	Bore	Part Number
3	2.19	1,560	2 7/16	1/2	<a href="#">03202-39-08</a>
3	3.25	2,340	3 1/2	1	<a href="#">03302-39-16</a>
3	4.25	3,120	4 1/2	3/4	<a href="#">03402-39-12</a>
3	4.25	3,120	4 1/2	1	<a href="#">03402-39-16</a>
4	2.19	2,080	2 7/16	1/2	<a href="#">04202-39-08</a>
4	3.25	3,120	3 1/2	3/4	<a href="#">04302-39-12</a>
4	3.25	3,120	3 1/2	1	<a href="#">04302-39-16</a>
4	3.25	3,120	3 1/2	1 1/4	<a href="#">04302-39-20</a>
4	4.25	3,540	4 1/2	3/4	<a href="#">04402-39-12</a>
4	4.25	3,720	4 1/2	1	<a href="#">04402-39-16</a>
4	4.25	4,160	4 1/2	1 1/4	<a href="#">04402-39-20</a>
6	2.19	2,160	2 7/16	5 1/2	<a href="#">06202-39-08</a>
6	3.25	3,540	3 1/2	5 1/2	<a href="#">06302-39-12</a>
6	3.25	3,720	3 1/2	1	<a href="#">06302-39-16</a>
6	3.25	4,630	3 1/2	1 1/4	<a href="#">06302-39-20</a>
6	4.25	3,720	4 1/2	1	<a href="#">06402-39-16</a>
6	4.25	4,630	4 1/2	1 1/4	<a href="#">06402-39-20</a>
6	5.25	3,720	5 1/2	1	<a href="#">06502-39-16</a>
6	5.25	4,630	5 1/2	1 1/4	<a href="#">06502-39-20</a>

\* These wheels have .25 shorter hub length.  
All dimensions are in inches. All weights are in pounds.

CONTINUED

# WHEELS NYTEC-MD

## PRECISION BALL BEARING

Diameter	Width	Capacity	Hub Length	Bore	Part Number
8	2.19	2,160	2 7/16	1/2	<a href="#">08202-39-08</a>
8	3.25	3,540	3 1/2	3/4	<a href="#">08302-39-12</a>
8	3.25	3,720	3 1/2	1	<a href="#">08302-39-16</a>
8	3.25	4,630	3 1/2	1 1/4	<a href="#">08302-39-20</a>
8	4.25	3,720	4 1/2	1	<a href="#">08402-39-16</a>
8	4.25	4,630	4 1/2	1 1/4	<a href="#">08402-39-20</a>
8	5.25	3,720	5 1/2	1	<a href="#">08502-39-16</a>
8	5.25	4,630	5 1/2	1 1/4	<a href="#">08502-39-20</a>
10	3.25	3,540	3 1/2	3/4	<a href="#">10302-39-12</a>
10	3.25	3,720	3 1/2	1	<a href="#">10302-39-16</a>
10	3.25	4,630	3 1/2	1 1/4	<a href="#">10302-39-20</a>
10	4.25	3,720	4 1/2	1	<a href="#">10402-39-16</a>
10	4.25	4,630	4 1/2	1 1/4	<a href="#">10402-39-20</a>
10	5.25	3,720	5 1/2	1	<a href="#">10502-39-16</a>
10	5.25	4,630	5 1/2	1 1/4	<a href="#">10502-39-20</a>
12	3.25	3,540	3 1/2	3/4	<a href="#">12302-39-12</a>
12	3.25	3,720	3 1/2	1	<a href="#">12302-39-16</a>
12	3.25	4,630	3 1/2	1 1/4	<a href="#">12302-39-20</a>
12	4.25	3,720	3 1/2	1	<a href="#">12402-39-16</a>
12	4.25	4,630	3 1/2	1 1/4	<a href="#">12402-39-20</a>
12	5.25	3,720	5 1/2	1	<a href="#">12502-39-16</a>
12	5.25	4,630	5 1/2	1 1/4	<a href="#">12502-39-20</a>
12	6.25	3,720	6 1/2	1	<a href="#">12602-39-16</a>
12	6.25	4,630	6 1/2	1 1/4	<a href="#">12602-39-20</a>

\* These wheels have .25 shorter hub length.  
All dimensions are in inches. All weights are in pounds.



WHEELS  
**KEYWAY**

# WHEELS KEYWAY



## FEATURES

A wide variety of keyway drive wheels are available. Keyway drive wheels are used in various power transmission applications. The keyways are cut to fit a keywayed shaft and are held in place with two set screws. One set screw is placed over the key and one at 90 degrees to the keyway. The most popular models in rubber and soft polyurethane are shown in the charts. Keyway wheels are manufactured in other materials, forged steel or cast iron, are available. Check the wheel widths on the chart and select the appropriate bushing. Quotes for specific requirements is also readily available.

MAXIMUM CAPACITY

**3,000** lbs.

### BUSHINGS FOR MOTORIZED / KEYWAY WHEELS

Part	Inner Diameter	Outer Diameter	Length	Keyway	Wheel Width
KWAA	0.5	1.19	2.44	0.125	2"
KWBB	0.75	1.19	2.44	0.188	2"
KWA	0.5	1.94	3.25	0.125	2-1/2" or 3"
KWB	0.75	1.94	3.25	0.188	2-1/2" or 3"
KWC	1	1.94	3.25	0.25	2-1/2" or 3"
KWD	1.25	1.94	3.25	0.25	2-1/2" or 3"
KWE	1.5	2.44	4.25	0.375	4"
KWEE	1.5	2.44	5.25	0.375	5"

# WHEELS KEYWAY

## BEARINGLESS

Diameter	Width	Capacity	Hub Length	Bore	Keyway Size	Part Number
3	2.00	300	3 1/4 offset	1/2	1/8 x 1/16	<a href="#">03200-70-08-KWA</a>
3	2.00	300	3 1/4 offset	3/4	3/16 x 3/32	<a href="#">03200-70-12-KWB</a>
3	2.00	300	3 1/4 offset	1/2	1/8 x 1/16	<a href="#">03200-61-08-KWA</a>
3	2.00	300	3 1/4 offset	3/4	3/16 x 3/32	<a href="#">03200-61-12-KWB</a>
4	2.00	350	3 1/4 offset	1/2	1/8 x 1/16	<a href="#">04200-70-08-KWA</a>
4	2.00	350	3 1/4 offset	3/4	3/16 x 3/32	<a href="#">04200-70-12-KWB</a>
4	2.00	350	3 1/4 offset	1/2	1/8 x 1/16	<a href="#">04200-66-08-KWA</a>
4	2.00	350	3 1/4 offset	3/4	3/16 x 3/32	<a href="#">04200-66-12-KWB</a>
5	2.00	400	2 3/16	1/2	1/8 x 1/16	<a href="#">05200-70-08-KWAA</a>
5	2.00	400	2 3/16	3/4	3/16 x 3/32	<a href="#">05200-70-12-KWBB</a>
5	2.00	400	2 3/16	1/2	1/8 x 1/16	<a href="#">05200-61-08-KWAA</a>
5	2.00	400	2 3/16	3/4	3/16 x 3/32	<a href="#">05200-61-12-KWBB</a>
6	2.00	425	2 3/16	1/2	1/8 x 1/16	<a href="#">06200-70-08-KWAA</a>
6	2.00	425	2 3/16	3/4	3/16 x 3/32	<a href="#">06200-70-12-KWBB</a>
6	3.00	500	3 1/4	1/2	1/8 x 1/16	<a href="#">06300-70-08-KWA</a>
6	3.00	500	3 1/4	3/4	3/16 x 3/32	<a href="#">06300-70-12-KWB</a>
6	3.00	500	3 1/4	1	1/4 x 1/8	<a href="#">06300-70-16-KWC</a>
6	3.00	500	3 1/4	1 1/4	1/4 x 1/8	<a href="#">06300-70-20-KWD</a>
6	2.00	640	2 3/16	1/2	1/8 x 1/16	<a href="#">06200-61-08-KWAA</a>
6	2.00	640	2 3/16	3/4	3/16 x 3/32	<a href="#">06200-61-12-KWBB</a>
6	3.00	800	3 1/4	1/2	1/8 x 1/16	<a href="#">06300-66-08-KWA</a>
6	3.00	800	3 1/4	3/4	3/16 x 3/32	<a href="#">06300-66-12-KWB</a>
6	3.00	1,600	3 1/4	1	1/4 x 1/8	<a href="#">06300-66-16-KWC</a>
6	3.00	1,600	3 1/4	1 1/4	1/4 x 1/8	<a href="#">06300-66-20-KWD</a>
8	2.00	500	2 3/16	1/2	1/8 x 1/16	<a href="#">08200-70-08-KWAA</a>
8	2.00	500	2 3/16	3/4	3/16 x 3/32	<a href="#">08200-70-12-KWBB</a>
8	3.00	850	3 1/4	1/2	1/8 x 1/16	<a href="#">08300-70-08-KWA</a>
8	3.00	850	3 1/4	3/4	3/16 x 3/32	<a href="#">08300-70-12-KWB</a>
8	3.00	850	3 1/4	1	1/4 x 1/8	<a href="#">08300-70-16-KWC</a>
8	3.00	850	3 1/4	1 1/4	1/4 x 1/8	<a href="#">08300-70-20-KWD</a>
8	2.00	500	2 3/16	1/2	1/8 x 1/16	<a href="#">08200-61-08-KWAA</a>
8	2.00	500	2 3/16	3/4	3/16 x 3/32	<a href="#">08200-61-12-KWBB</a>
8	3.00	800	3 1/4	1/2	1/8 x 1/16	<a href="#">08300-66-08-KWA</a>
8	3.00	800	3 1/4	3/4	3/16 x 3/32	<a href="#">08300-66-12-KWB</a>
8	3.00	1,600	3 1/4	1	1/4 x 1/8	<a href="#">08300-66-16-KWC</a>
8	3.00	1,600	3 1/4	1 1/4	1/4 x 1/8	<a href="#">08300-66-20-KWD</a>


CONTINUED

All dimensions are in inches. All weights are in pounds.

## BEARINGLESS

Diameter	Width	Capacity	Hub Length	Bore	Keyway Size	Part Number
10	3.00	800	3 1/4	1/2	1/8 x 1/16	<a href="#">10300-70-08-KWA</a>
10	3.00	800	3 1/4	3/4	3/16 x 3/32	<a href="#">10300-70-12-KWB</a>
10	3.00	1,000	3 1/4	1	1/4 x 1/8	<a href="#">10300-70-16-KWC</a>
10	3.00	1,000	3 1/4	1 1/4	1/4 x 1/8	<a href="#">10300-70-20-KWD</a>
10	4.00	1,400	4 1/4	1 1/2	3/8 x 3/16	<a href="#">10400-70-24-KWE</a>
10	3.00	800	3 1/4	3/4	3/16 x 3/32	<a href="#">10300-66-12-KWB</a>
10	3.00	1,600	3 1/4	1	1/4 x 1/8	<a href="#">10300-66-16-KWC</a>
10	3.00	1,600	3 1/4	1 1/4	1/4 x 1/8	<a href="#">10300-66-20-KWD</a>
10	4.00	2,500	4 1/4	1 1/2	3/8 x 3/16	<a href="#">10400-66-24-KWE</a>
10	5.00	2,500	5 1/4	1 1/2	3/8 x 3/16	<a href="#">10500-66-24-KWEE</a>
12	4.00	3,000	4 1/4	1 1/2	3/8 x 3/16	<a href="#">12400-66-24-KWE</a>


All dimensions are in inches. All weights are in pounds.

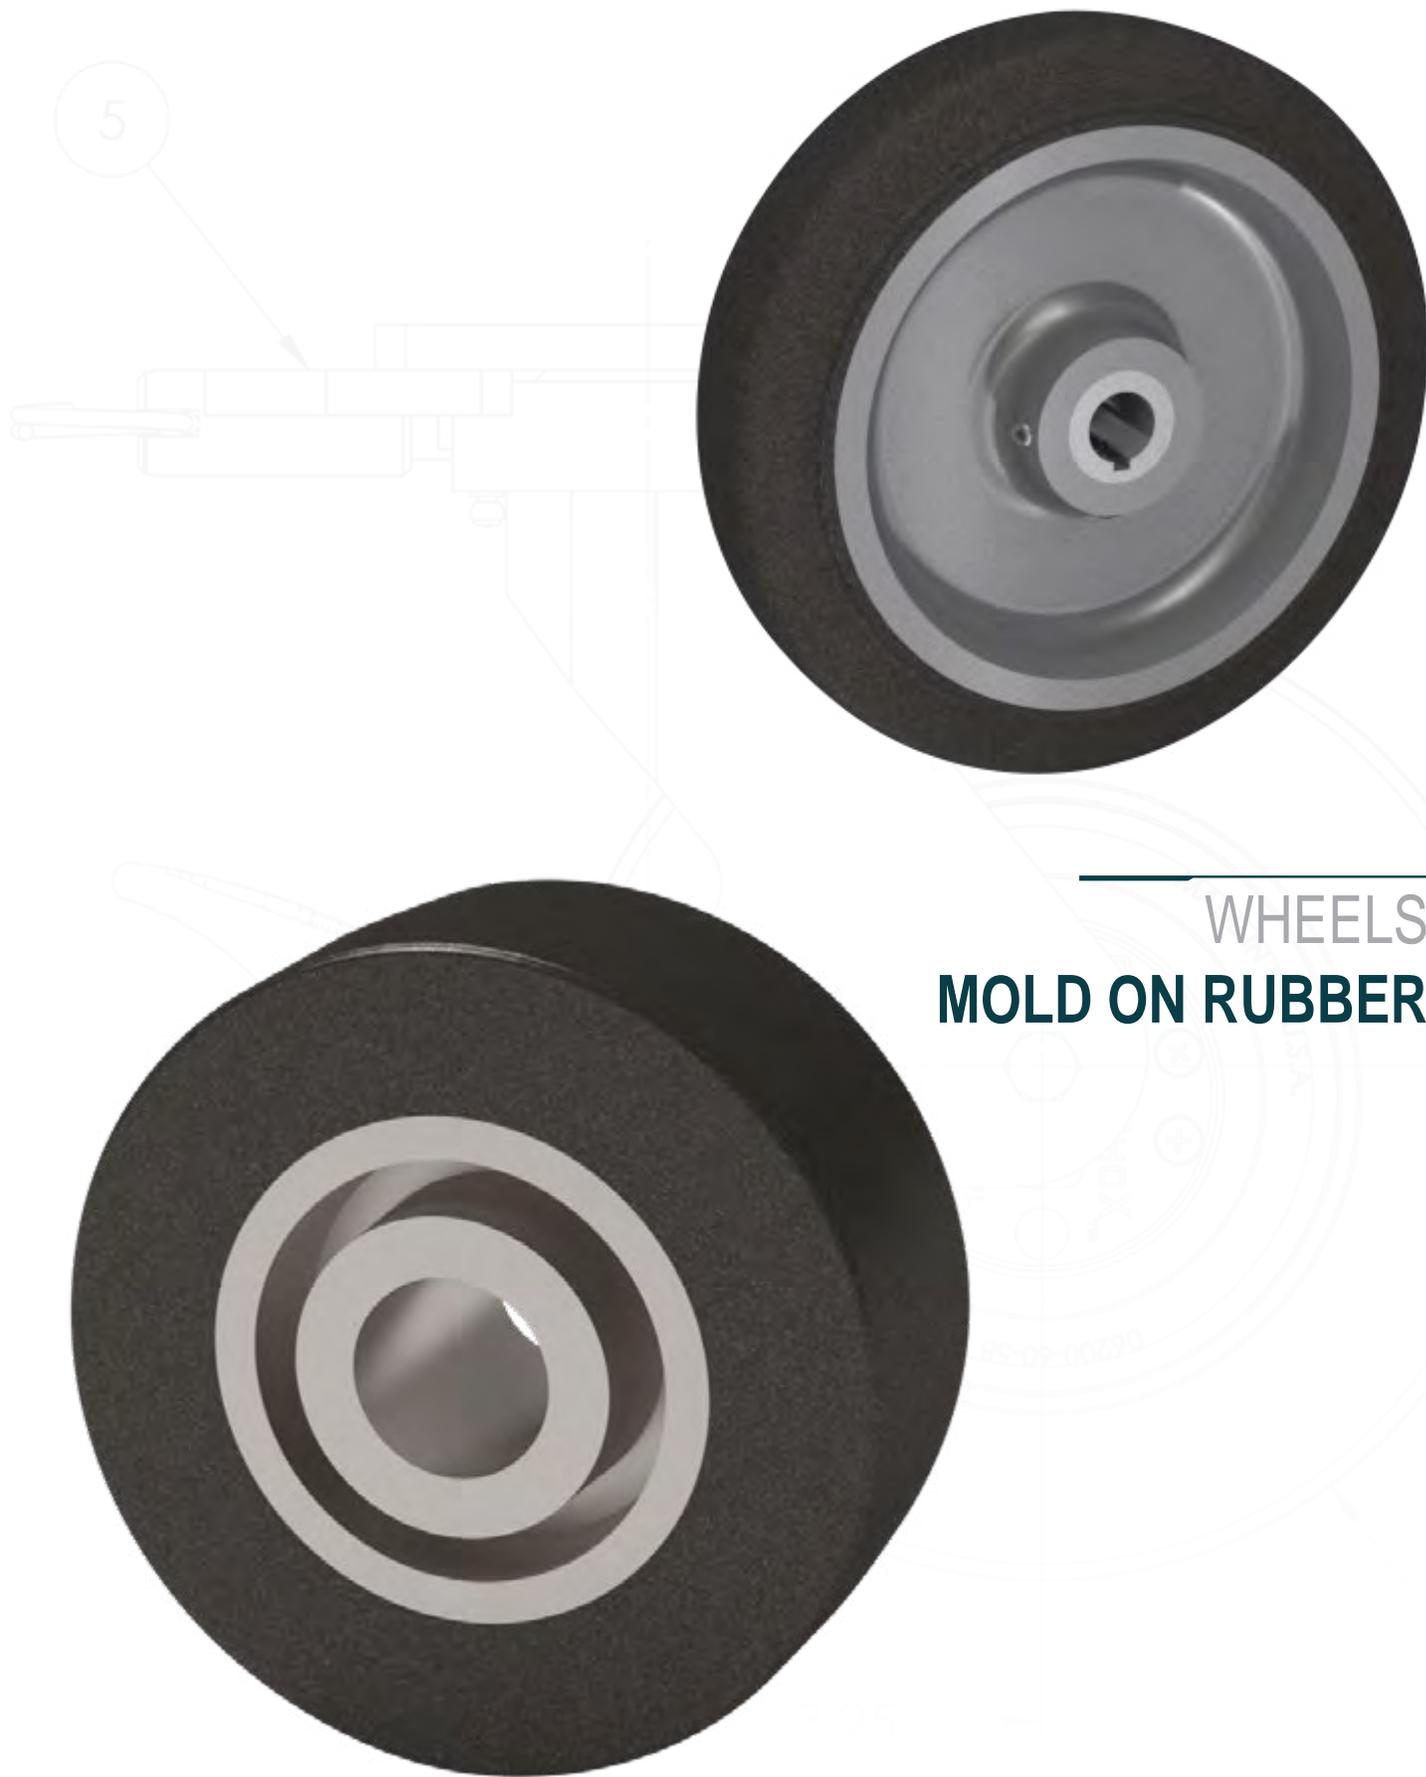

---

WHEELS  
**MOLD ON RUBBER**

# WHEELS MOLD ON RUBBER

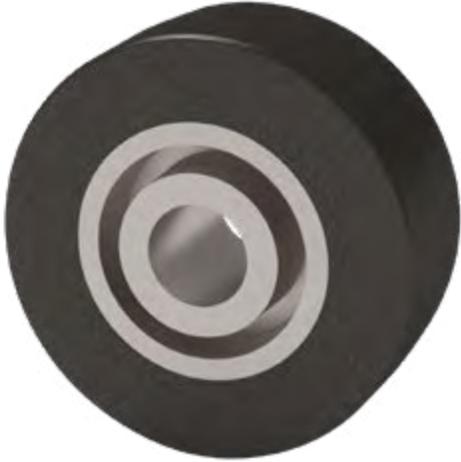

MAXIMUM CAPACITY

**3,000** lbs.

## FEATURES

**Bearings:** Delrin, oilite, roller, precision ball, tapered.

**Temperature:** Maximum to 180° F

**Durometer:** 70 Durometer Shore A

**Standard:** All 1-1/2" and 2" width wheels with 3/4" roller bearings are supplied with 1/2" spanner bushing.

## APPLICATIONS

Excellent for moist and wet environments, food service equipment, small waste bins, factory use, platform trucks and hotel equipment.

## BENEFITS

Caster Concepts offers the highest quality domestic Mold On Rubber wheels. Our mold on rubber wheels consist of a soft black, 70 durometer rubber tread permanently bonded Class 30 gray iron centers. Mold on rubber wheels provide excellent floor protection, a cushioned and quiet ride for the product being transported, and they absorb shock and vibration.

# WHEELS MOLD ON RUBBER

## STRAIGHT ROLLER BEARING

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
5	2.00	400	2 3/16	3/4	<a href="#">05201-70-12</a>	2.50
6	2.00	425	2 3/16	3/4	<a href="#">06201-70-12</a>	4.50
6	2.50	550	3 1/4	1	<a href="#">06251-70-16</a>	6.50
6	2.50	550	3 1/4	1 1/4	<a href="#">06251-70-20</a>	6.50
6	3.00	700	3 1/4	1	<a href="#">06301-70-16</a>	9.50
6	3.00	700	3 1/4	1 1/4	<a href="#">06301-70-20</a>	9.50
8	2.00	500	2 3/16	3/4	<a href="#">08201-70-12</a>	7.00
8	2.50	700	3 1/4	1	<a href="#">08251-70-16</a>	9.50
8	2.50	700	3 1/4	1 1/4	<a href="#">08251-70-20</a>	9.50
8	3.00	850	3 1/4	1	<a href="#">08301-70-16</a>	12.50
8	3.00	850	3 1/4	1 1/4	<a href="#">08301-70-20</a>	12.50
10	2.50	800	3 1/4	1	<a href="#">10251-70-16</a>	13.00
10	2.50	800	3 1/4	1 1/4	<a href="#">10251-70-20</a>	13.00
10	3.00	1,000	3 1/4	1	<a href="#">10301-70-16</a>	16.00
10	3.00	1,000	3 1/4	1 1/4	<a href="#">10301-70-20</a>	16.00
10	4.00	1,400	4 1/4	1 1/4	<a href="#">10401-70-20</a>	33.00
10	4.00	1,400	4 1/4	1 1/2	<a href="#">10401-70-24</a>	33.00
12	2.50	900	3 1/4	1	<a href="#">12251-70-16</a>	15.50
12	2.50	900	3 1/4	1 1/4	<a href="#">12251-70-20</a>	15.50
12	3.00	1,125	3 1/4	1	<a href="#">12301-70-16</a>	21.00
12	3.00	1,125	3 1/4	1 1/4	<a href="#">12301-70-20</a>	21.00
12	4.00	1,600	4 1/4	1 1/4	<a href="#">12401-70-20</a>	30.00
12	4.00	1,600	4 1/4	1 1/2	<a href="#">12401-70-24</a>	30.00
16	4.00	1,450	4 1/4	1 1/4	<a href="#">16401-70-20</a>	40.00
16	4.00	1,450	4 1/4	1 1/2	<a href="#">16401-70-24</a>	40.00
16	5.00	1,500	5 1/4	1 1/4	<a href="#">16501-70-20</a>	72.00
16	5.00	1,500	5 1/4	1 1/2	<a href="#">16501-70-24</a>	72.00
18	5.00	2,800	5 1/4	1 1/4	<a href="#">18501-70-20</a>	90.00
18	5.00	2,800	5 1/4	1 1/2	<a href="#">18501-70-24</a>	90.00
18	5.00	2,800	5 1/4	2	<a href="#">18501-70-32</a>	90.00
20	5.00	3,000	5 1/4	1 1/4	<a href="#">20501-70-20</a>	100.00
20	5.00	3,000	5 1/4	1 1/2	<a href="#">20501-70-24</a>	100.00
20	5.00	3,000	5 1/4	2	<a href="#">20501-70-32</a>	100.00

CONTINUED

All dimensions are in inches. All weights are in pounds.

# WHEELS MOLD ON RUBBER

## PRECISION TAPERED BEARING

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
6	2.50	550	3 1/2	3/4	<a href="#">06259-70-12</a>	6.50
6	2.50	550	3 1/2	1	<a href="#">06259-70-16</a>	6.50
6	3.00	700	3 1/2	3/4	<a href="#">06309-70-12</a>	9.50
6	3.00	700	3 1/2	1	<a href="#">06309-70-16</a>	9.50
8	2.50	700	3 1/2	3/4	<a href="#">08259-70-12</a>	9.50
8	3.00	850	3 1/2	3/4	<a href="#">08309-70-12</a>	12.50
8	3.00	850	3 1/2	1	<a href="#">08309-70-16</a>	12.50
8	3.00	850	3 1/2	1 1/4	<a href="#">08309-70-20</a>	12.50
10	2.50	800	3 1/2	3/4	<a href="#">10259-70-12</a>	13.00
10	2.50	800	3 1/2	1	<a href="#">10259-70-16</a>	13.00
10	3.00	1,000	3 1/2	3/4	<a href="#">10309-70-12</a>	16.00
10	3.00	1,000	3 1/2	1	<a href="#">10309-70-16</a>	16.00
10	4.00	1,400	4 1/2	1	<a href="#">10409-70-16</a>	33.00
10	4.00	1,400	4 1/2	1 1/4	<a href="#">10409-70-20</a>	33.00
12	2.50	900	3 1/2	3/4	<a href="#">12259-70-12</a>	15.50
12	2.50	900	3 1/2	1	<a href="#">12259-70-16</a>	15.50
12	3.00	1,150	3 1/2	3/4	<a href="#">12309-70-12</a>	21.00
12	3.00	1,150	3 1/2	1	<a href="#">12309-70-16</a>	21.00
12	4.00	1,600	4 1/2	1	<a href="#">12409-70-16</a>	30.00
12	4.00	1,600	4 1/2	1 1/4	<a href="#">12409-70-20</a>	30.00
16	4.00	1,450	4 1/2	1	<a href="#">16409-70-16</a>	40.00
16	4.00	1,450	4 1/2	1 1/4	<a href="#">16409-70-20</a>	40.00
16	5.00	1,500	5 1/2	1	<a href="#">16509-70-16</a>	72.00
16	5.00	1,500	5 1/2	1 1/4	<a href="#">16509-70-20</a>	72.00
18	5.00	2,800	5 1/2	1	<a href="#">18509-70-16</a>	90.00
18	5.00	2,800	5 1/2	1 1/4	<a href="#">18509-70-20</a>	90.00
18	5.00	2,800	5 1/2	1 1/2	<a href="#">18509-70-24</a>	90.00
20	5.00	3,000	5 1/2	1	<a href="#">20509-70-16</a>	100.00
20	5.00	3,000	5 1/2	1 1/4	<a href="#">20509-70-20</a>	100.00
20	5.00	3,000	5 1/2	1 1/2	<a href="#">20509-70-24</a>	100.00

CONTINUED

# WHEELS MOLD ON RUBBER

## BEARINGLESS

Diameter	Width	Capacity	Hub Length	Bore	Part Number	Weight
5	2.00	400	2 3/16	1 3/16	<a href="#">05200-70-19</a>	2.50
6	2.00	425	2 3/16	1 3/16	<a href="#">06200-70-19</a>	4.50
6	2.50	550	3 1/4	1 15/16	<a href="#">06250-70-31</a>	6.50
6	3.00	700	3 1/4	1 15/16	<a href="#">06300-70-31</a>	9.50
8	2.00	500	2 3/16	1 3/16	<a href="#">08200-70-19</a>	7.00
8	2.50	700	3 1/4	1 15/16	<a href="#">08250-70-31</a>	9.50
8	3.00	850	3 1/4	1 15/16	<a href="#">08300-70-31</a>	12.50
10	2.50	800	3 1/4	1 15/16	<a href="#">10250-70-31</a>	13.00
10	3.00	1,000	3 1/4	1 15/16	<a href="#">10300-70-31</a>	16.00
10	4.00	1,400	4 1/4	2 7/16	<a href="#">10400-70-39</a>	33.00
12	2.50	900	3 1/4	1 15/16	<a href="#">12250-70-31</a>	15.50
12	3.00	1,125	3 1/4	1 15/16	<a href="#">12300-70-31</a>	21.00
12	4.00	1,600	4 1/4	2 7/16	<a href="#">12400-70-39</a>	30.00
16	4.00	1,450	4 1/4	2 7/16	<a href="#">16400-70-39</a>	40.00
16	5.00	1,500	5 1/4	2 7/16	<a href="#">16500-70-39</a>	72.00
18	5.00	2,800	5 1/4	2 7/16	<a href="#">18500-70-39</a>	90.00
18	5.00	2,800	5 1/4	3 1/4	<a href="#">18500-70-50</a>	90.00
20	5.00	3,000	5 1/4	2 7/16	<a href="#">20500-70-39</a>	100.00
20	5.00	3,000	5 1/4	3 1/4	<a href="#">20500-70-50</a>	100.00

All dimensions are in inches. All weights are in pounds.