

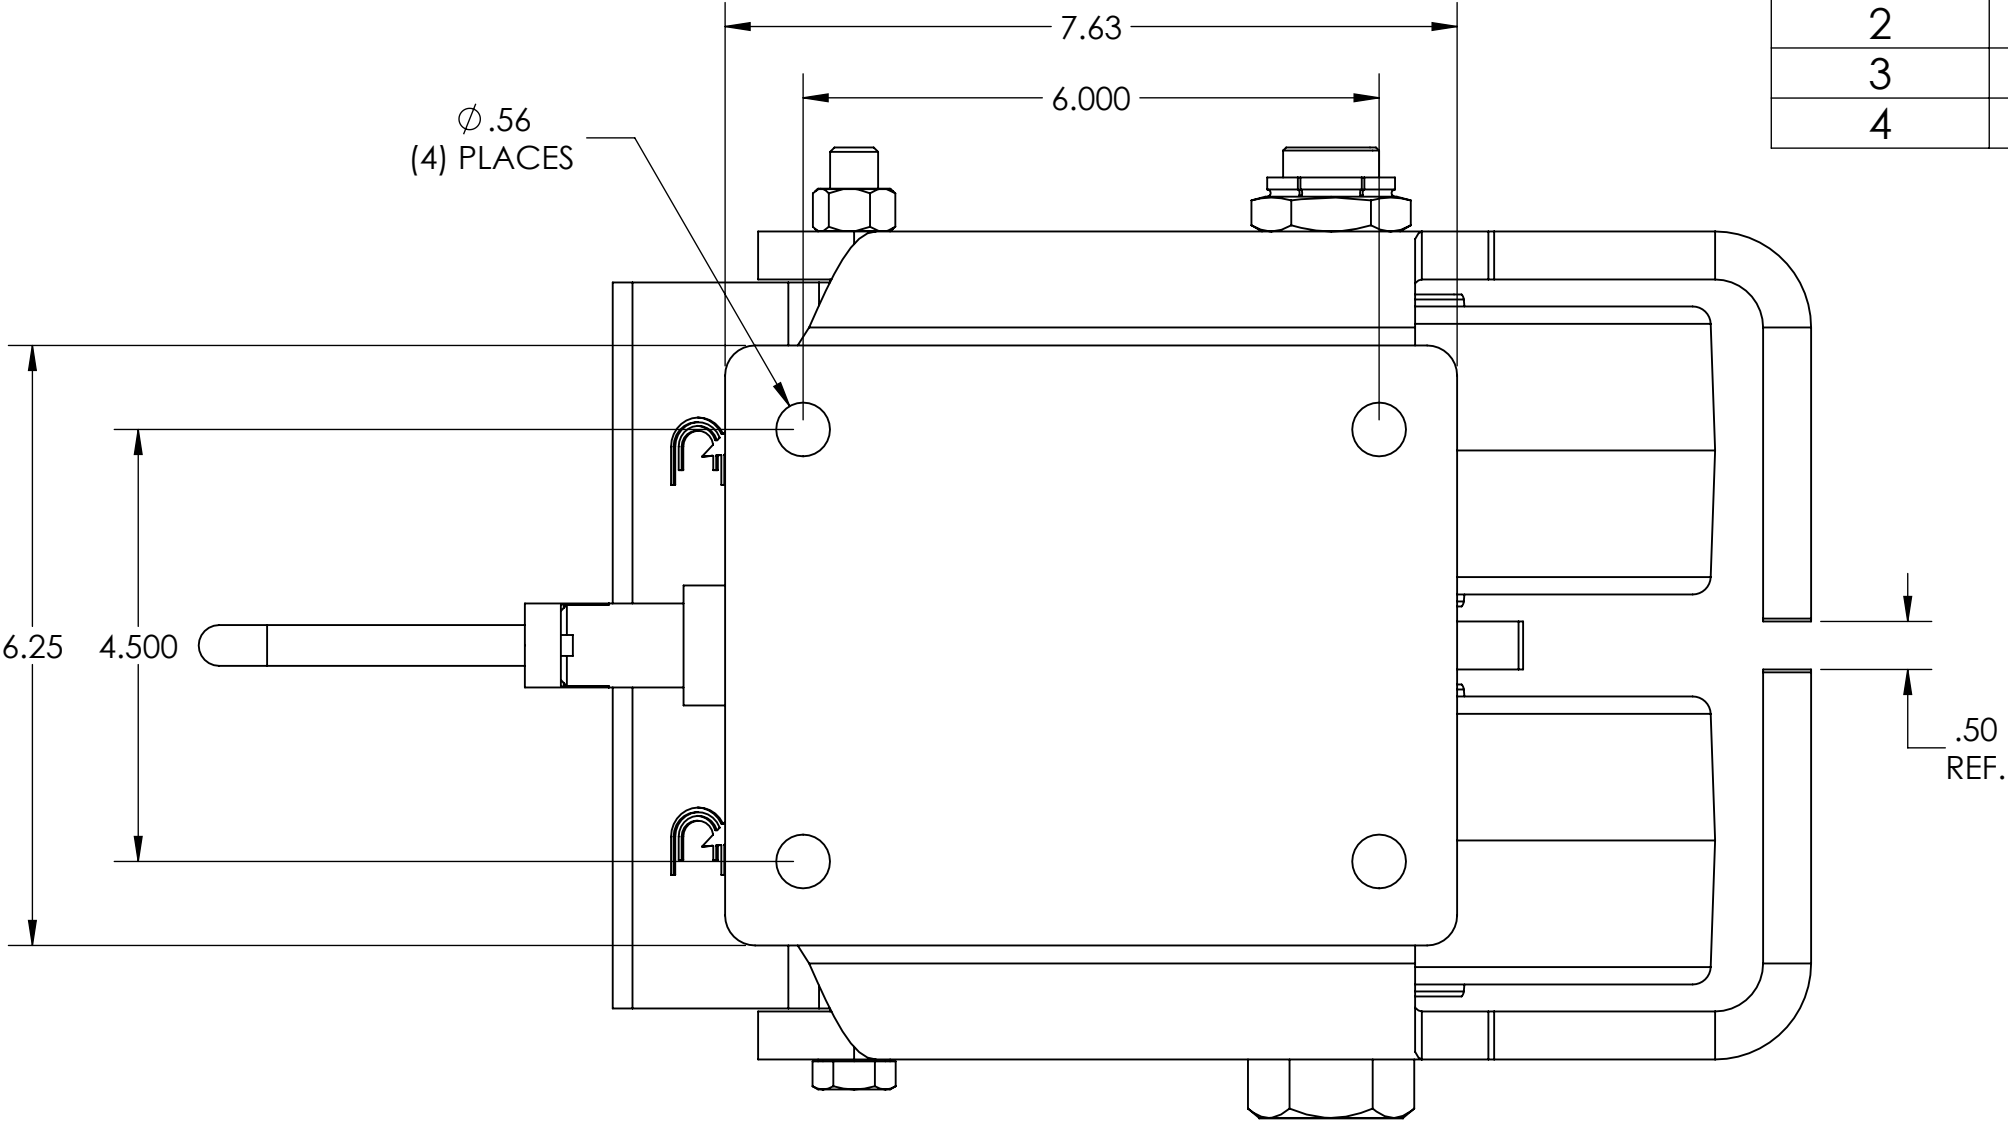
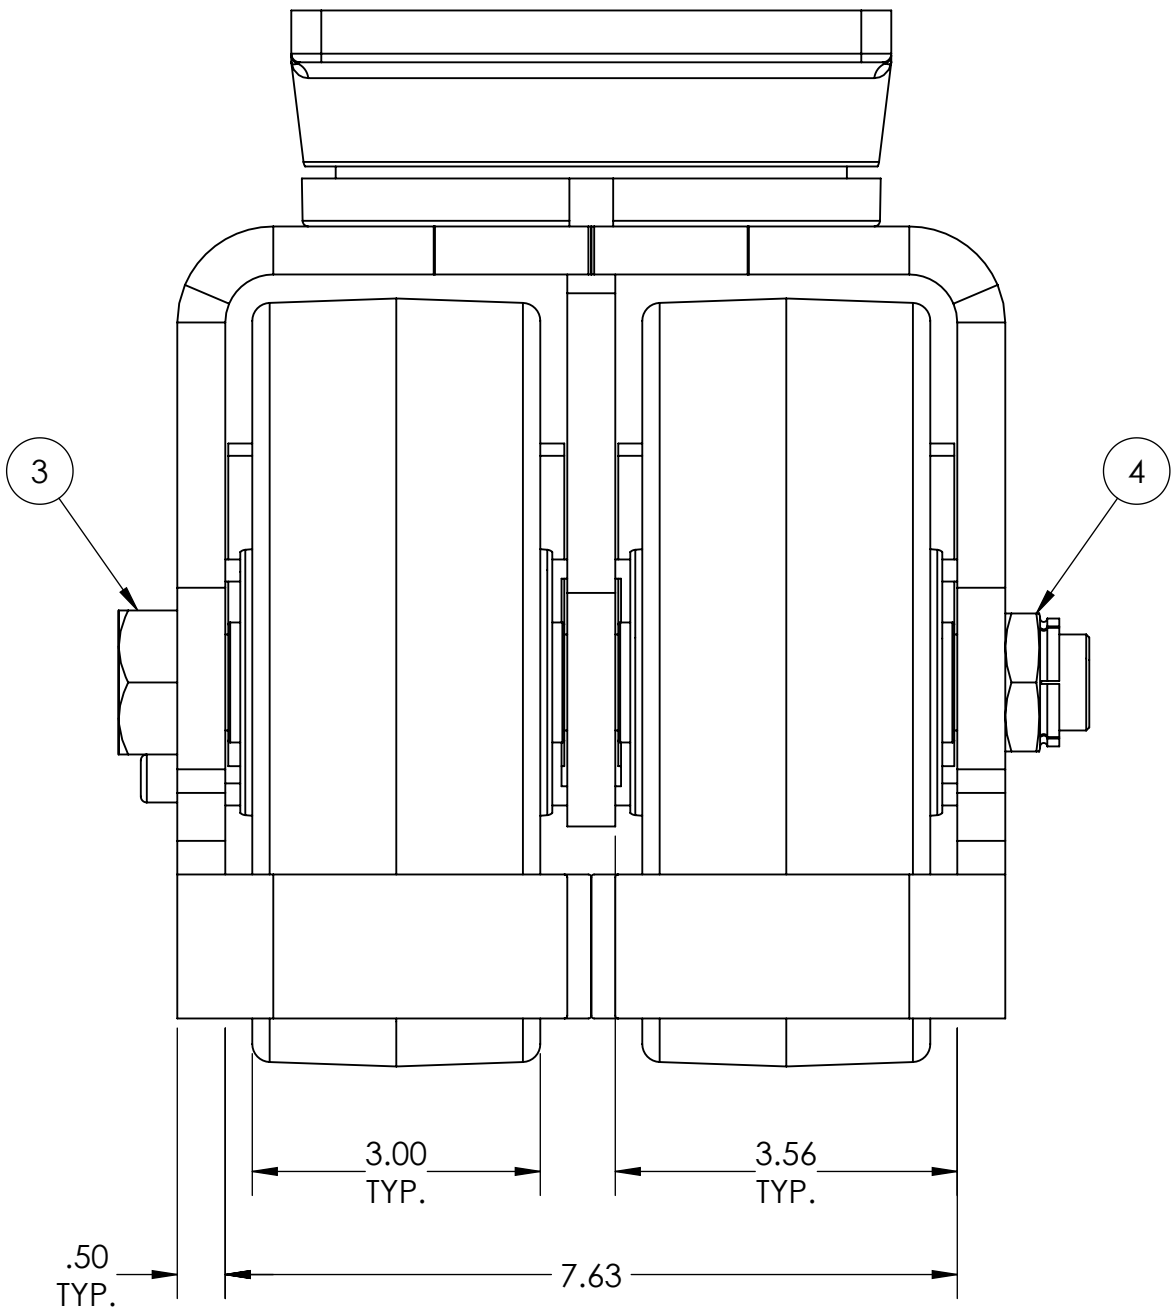
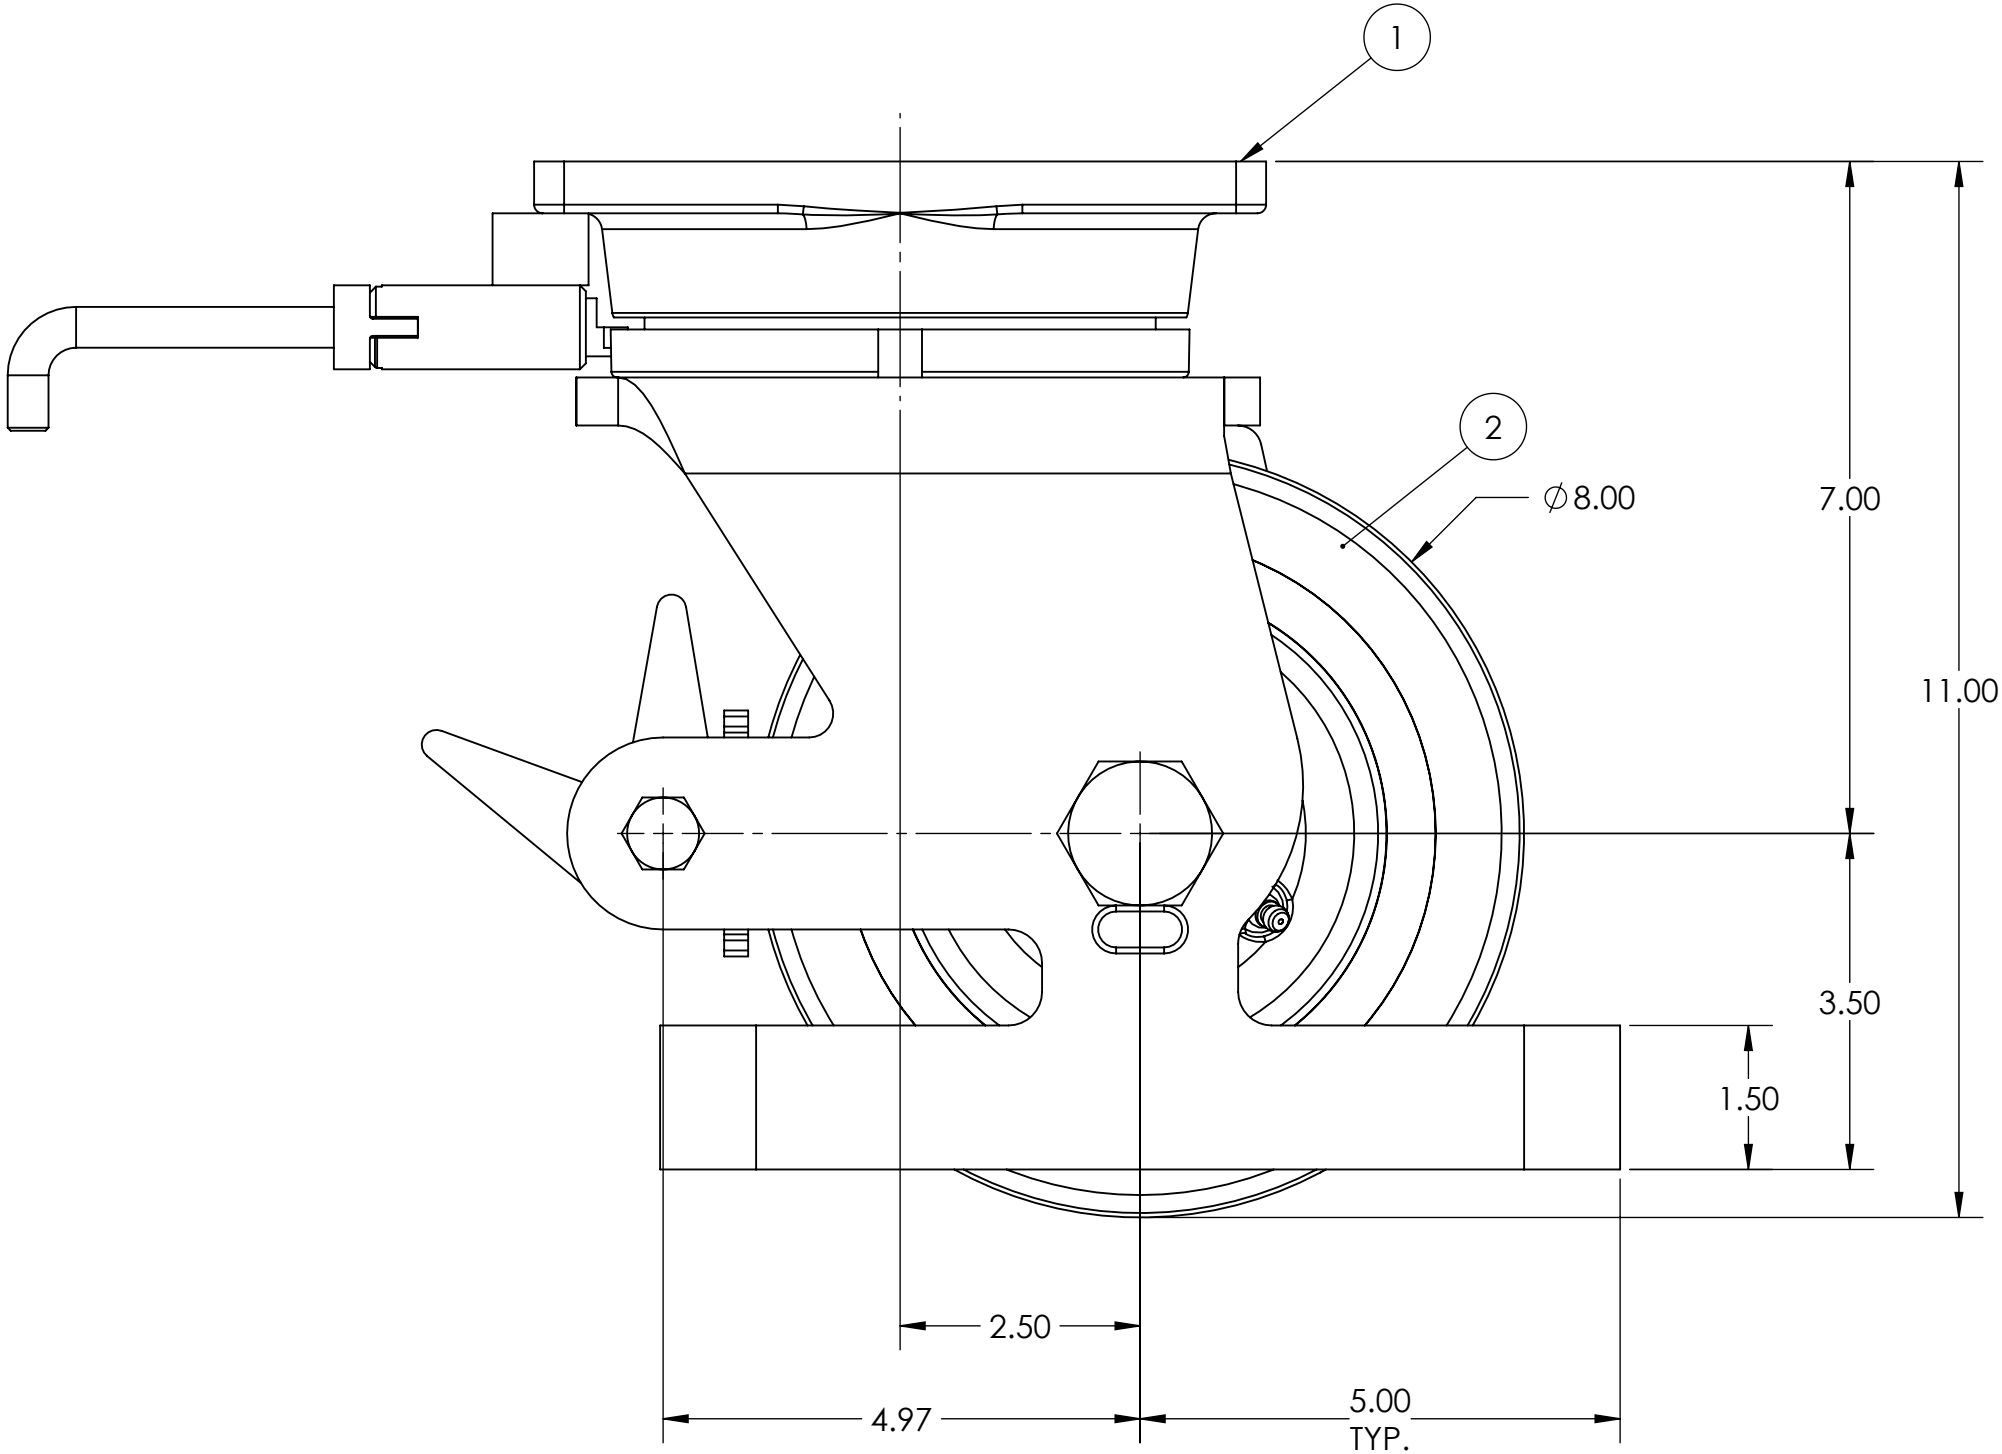


ITEM NO.	QTY.	PART/DRAWING NO.	DESCRIPTION	MATERIAL
1	1	2-81-08300-00-1HDLPTG	2-81 SER. 8.00 X 3.00 SWL. RIG C/W HDSL, PLB & TG	MISC.
2	2	08309-96-16	Ø8.00 X 3.00 T/R 95 POLY WHEEL	MISC.
3	1	AX1615200	1"-14 X 9-1/2 GRADE 5 HHCS	AISI 1038
4	1	LN161413	1"-14 LOW HEIGHT FLEXLOC NUT	STEEL



- NOTES:
1. CASTER IS RATED AS 7,800 LBS @ WALKING SPEEDS, INTERMITTENT USE.
 2. AT 7,800 LBS OF THE LOAD THERE WILL BE A CALCULATED FLOOR LOAD OF 859 PSI.
 3. ESTIMATED COF OF ROLLING RESISTANCE IS 3% OF LOAD TO START MOVING AND 1% OF LOAD TO MAINTAIN. (THIS IS FIGURING 2 SWIVEL AND 2 RIGID CASTERS ON SMOOTH, FLAT CONCRETE) APPLICATION AND FLOOR CONDITIONS WILL IMPACT THIS.
 4. CASTER WEIGHT: 73.20LBS



 CASTER CONCEPTS, INC. 16000 E. MICHIGAN AVE. ALBION, MI 49224 (517) 629-8838 casterconcepts.com	TOLERANCE SPECS.		UNLESS OTHERWISE SPECIFIED THE FOLLOWING TOLERANCES APPLY: .XX = $\pm .030$.XXX = $\pm .010$ X° = $\pm 1.0^\circ$ PART TO BE FREE OF BURRS AND SHARP EDGES		DESCRIPTION: 2-81-08309-96-1HDLPTGSP	
	FINISH SPECS.		GOLD POWDER COAT ON RIG, GRAY PAINT ON WHEEL CORES		PART/DRAWING NO: SP18121901HDLPTG	
WHERE USED:		MATERIAL SPECS.		APPROVED BY:		DATE: 3/27/2019
CHECKED BY: NEKIBUR R.				DRAWN BY: PRAVEEN K.		SCALE: 1:2 C-SIZE
				THIRD ANGLE		

NOTICE: THIS DRAWING AND DESIGN INFORMATION CONTAINED HEREIN SHALL REMAIN THE SOLE PROPERTY OF CASTER CONCEPTS INC. IT IS SUBMITTED FOR USE IN REFERENCE ONLY AND SHALL NOT BE DUPLICATED OR GIVEN TO A THIRD PARTY WITHOUT THE WRITTEN CONSENT OF CASTER CONCEPTS INC. THIS DRAWING MUST BE RETURNED TO CASTER CONCEPTS INC. UPON REQUEST AT ANY TIME. ACCEPTANCE OF THIS DRAWING SHALL BE CONSTRUED AS AN AGREEMENT OF THESE TERMS.