

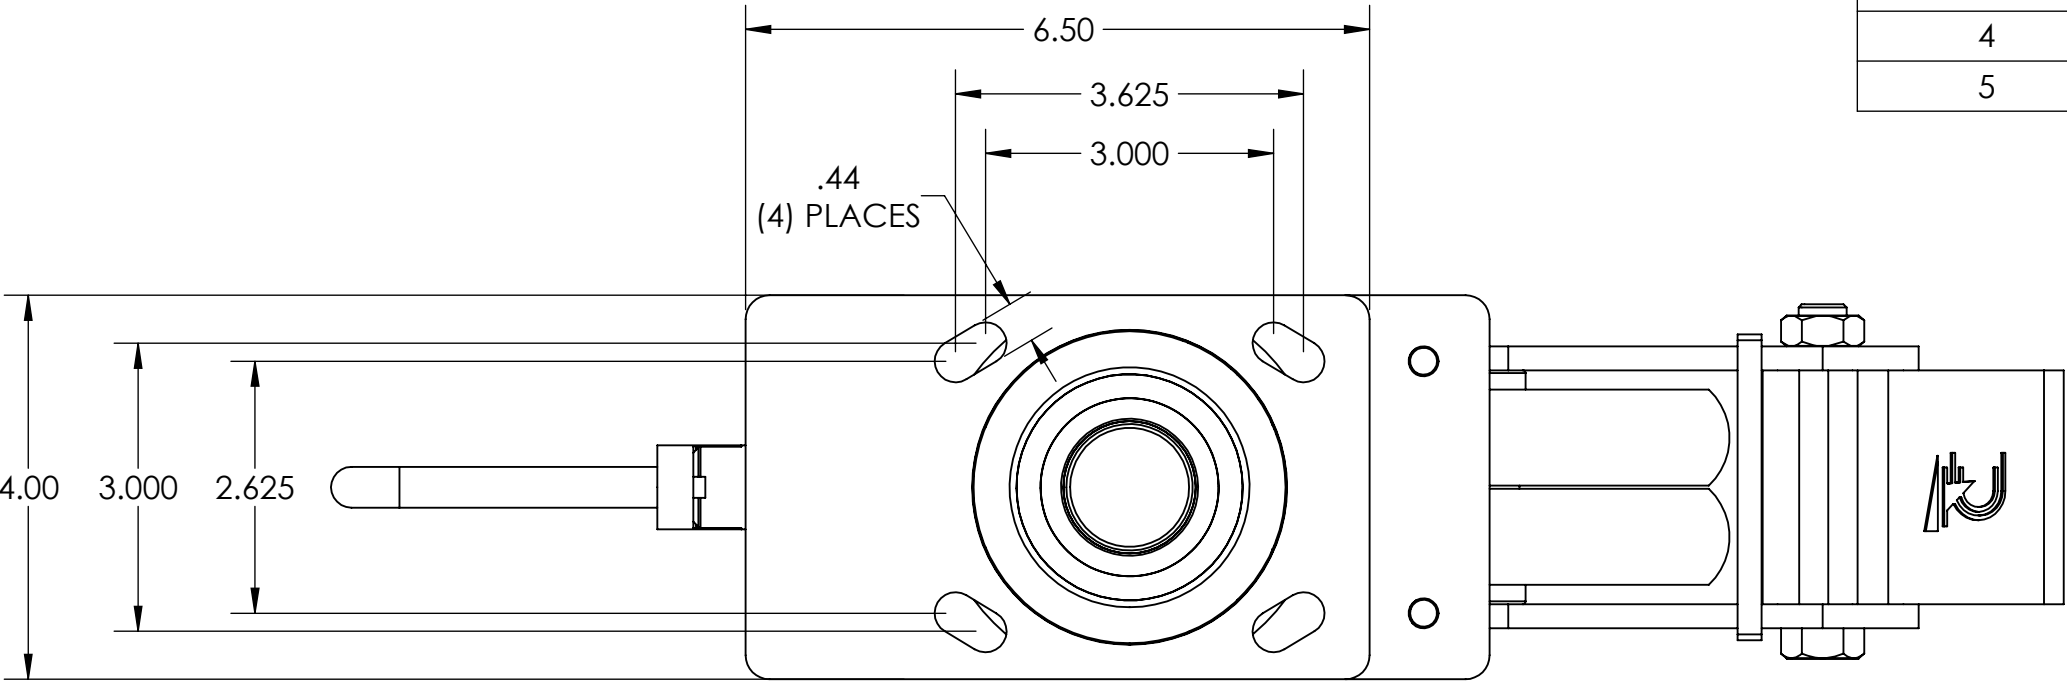
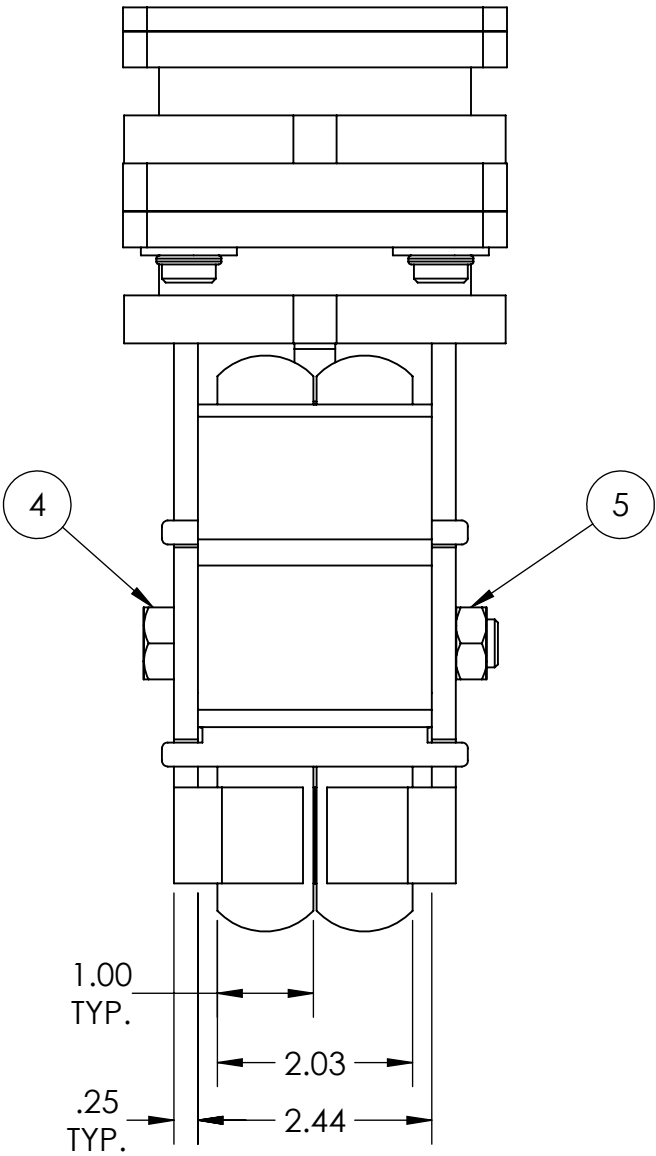
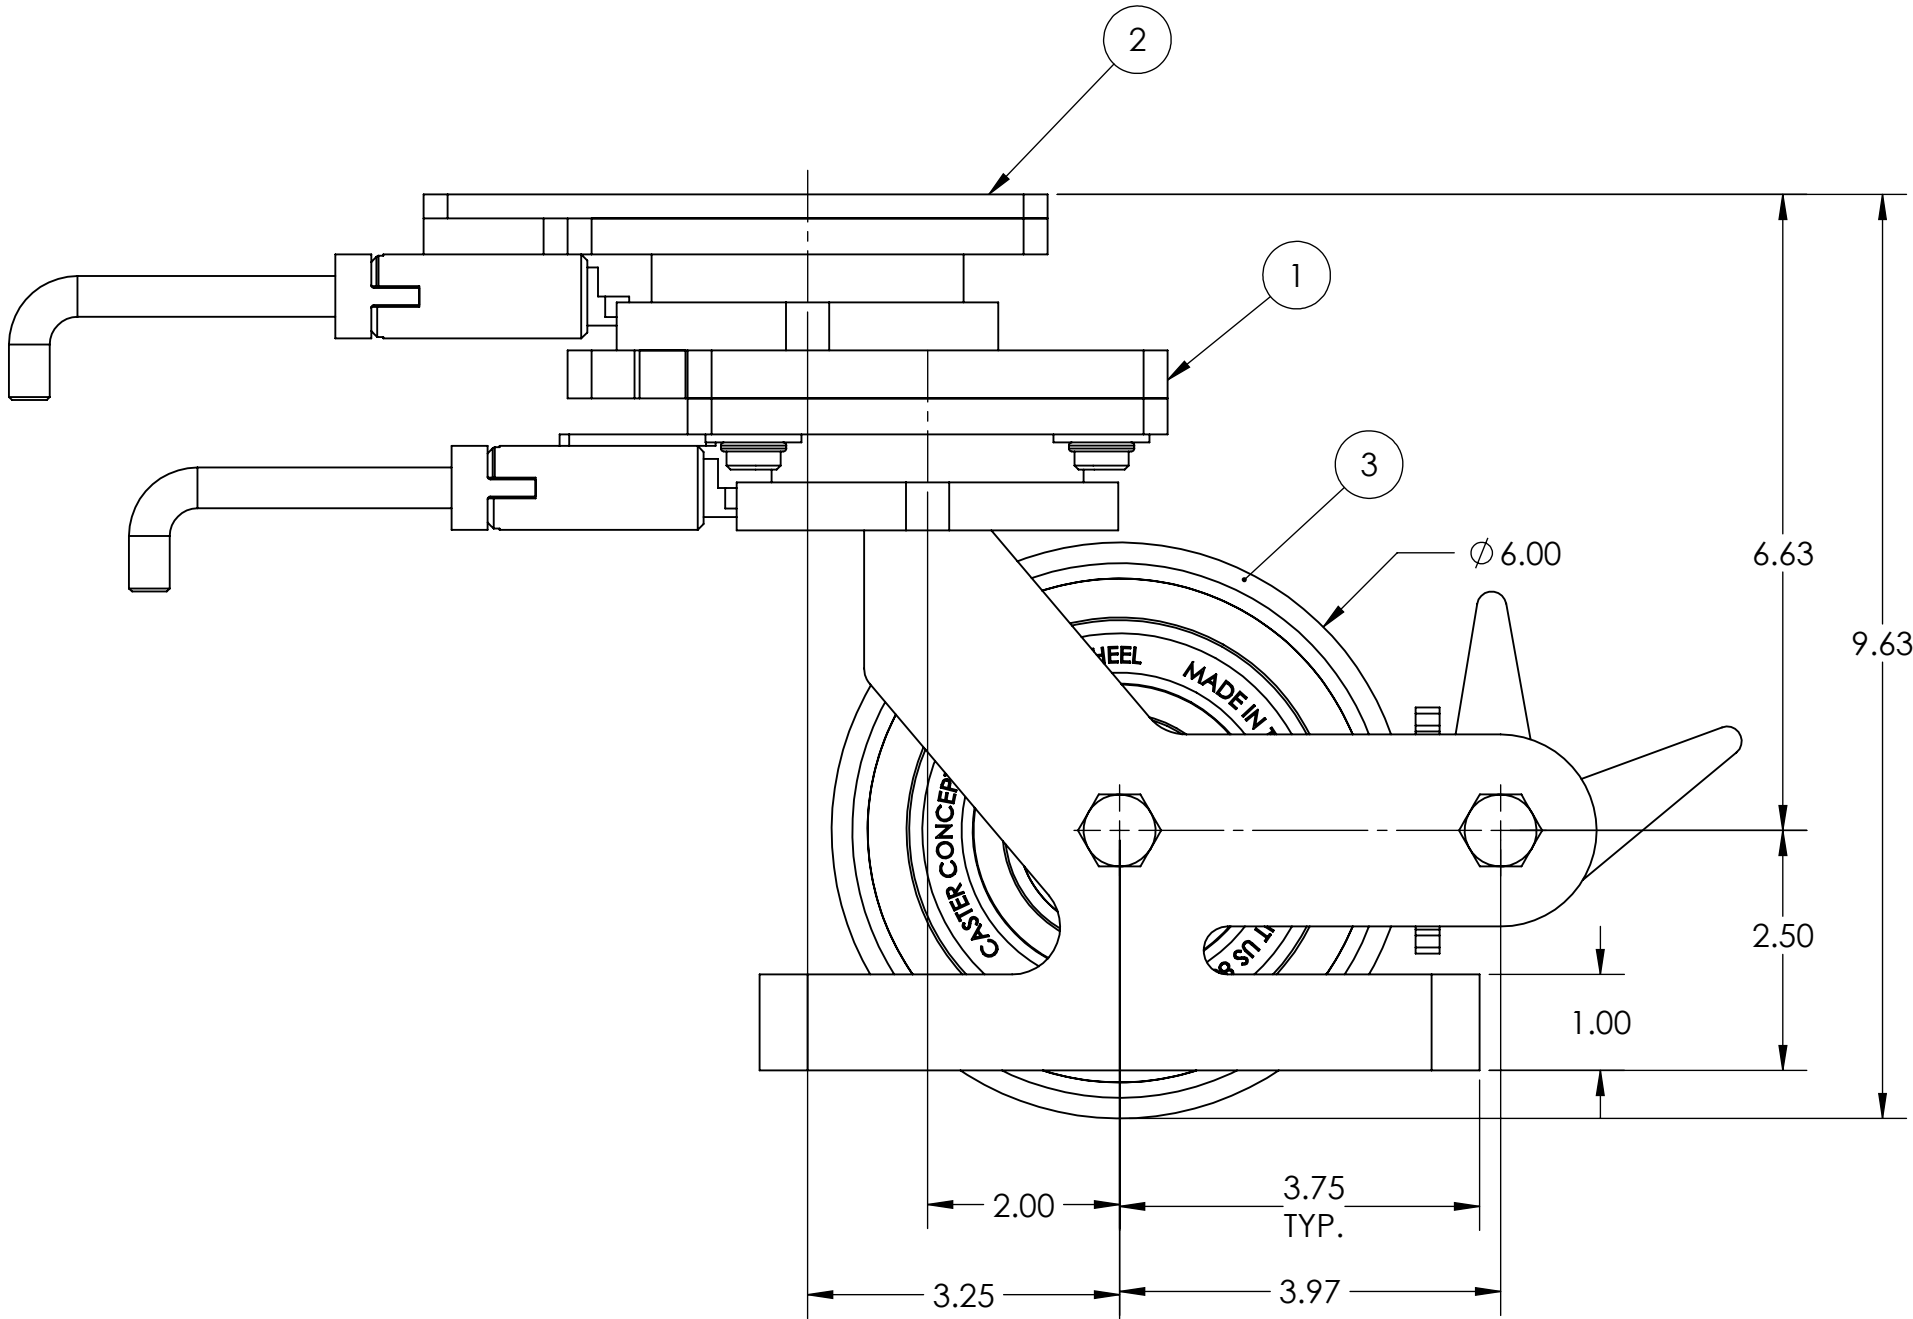


ITEM NO.	QTY.	PART/DRAWING NO.	DESCRIPTION	MATERIAL
1	1	SP18121303A	110-06200-00-1DHLPTG	MISC.
2	1	SP18121303D	DHDSL-110SP	STEEL
3	1	06202-44-08	Ø6.00 X 2.00 ET85 TWERGO WHEEL	MISC.
4	1	AX085400	1/2-20 X 3-3/8 SOLID AXLE ZINC	AISI 1038
5	1	LN08200	1/2-20 TOP LOCK NUT	AISI 1038



- NOTES:
1. CASTER IS RATED AS 910 LBS @ WALKING SPEEDS, INTERMITTENT USE.
 2. AT 910 LBS OF THE LOAD THERE WILL BE A CALCULATED FLOOR LOAD OF 812 PSI.
 3. ESTIMATED COF OF ROLLING RESISTANCE IS 3% OF LOAD TO START MOVING AND 1% OF LOAD TO MAINTAIN. (THIS IS FIGURING 2 SWIVEL AND 2 RIGID CASTERS ON SMOOTH, FLAT CONCRETE) APPLICATION AND FLOOR CONDITIONS WILL IMPACT THIS.
 4. CASTER WEIGHT: 21.45LBS
 5. USE LOW HEIGHT SHCS FOR INSTALLATION OF CASTER.



 CASTER CONCEPTS, INC. 16000 E. MICHIGAN AVE. ALBION, MI 49224 (517) 629-8838 casterconcepts.com	TOLERANCE SPECS.		UNLESS OTHERWISE SPECIFIED THE FOLLOWING TOLERANCES APPLY: .XX = ±.030 .XXX = ±.010 X° = ±1.0° PART TO BE FREE OF BURRS AND SHARP EDGES		DESCRIPTION: 110-06202-44-1DHLPTGSP	
	FINISH SPECS.		ZINC PLATING ON RIG		PART/DRAWING NO: SP18121303DHDLPTG	DATE: 11/26/2019
WHERE USED:	MATERIAL SPECS.		APPROVED BY:		DRAWN BY: PRAVEEN K.	SCALE: 1:2 C-SIZE
CHECKED BY: NEKIBUR R.					THIRD ANGLE	

NOTICE: THIS DRAWING AND DESIGN INFORMATION CONTAINED HEREIN SHALL REMAIN THE SOLE PROPERTY OF CASTER CONCEPTS INC. IT IS SUBMITTED FOR USE IN REFERENCE ONLY AND SHALL NOT BE DUPLICATED OR GIVEN TO A THIRD PARTY WITHOUT THE WRITTEN CONSENT OF CASTER CONCEPTS INC. THIS DRAWING MUST BE RETURNED TO CASTER CONCEPTS INC. UPON REQUEST AT ANY TIME. ACCEPTANCE OF THIS DRAWING SHALL BE CONSTRUED AS AN AGREEMENT OF THESE TERMS.