



NOTES:

- 1. CASTER IS RATED AS 2,070 LBS @ WALKING SPEEDS, INTERMITTENT USE.
- 2. AT 2,070 LBS OF THE LOAD THERE WILL BE A CALCULATED FLOOR LOAD OF 1,005 PSI.
- 3. ESTIMATED COF OF ROLLING RESISTANCE IS 3% OF LOAD TO START MOVING AND 1% OF LOAD TO MAINTAIN. (THIS IS FIGURING 2 SWIVEL AND 2 RIGID CASTERS ON SMOOTH, FLAT CONCRETE) APPLICATION AND FLOOR CONDITIONS WILL IMPACT THIS.
- 4. CASTER WEIGHT: 23.95LBS

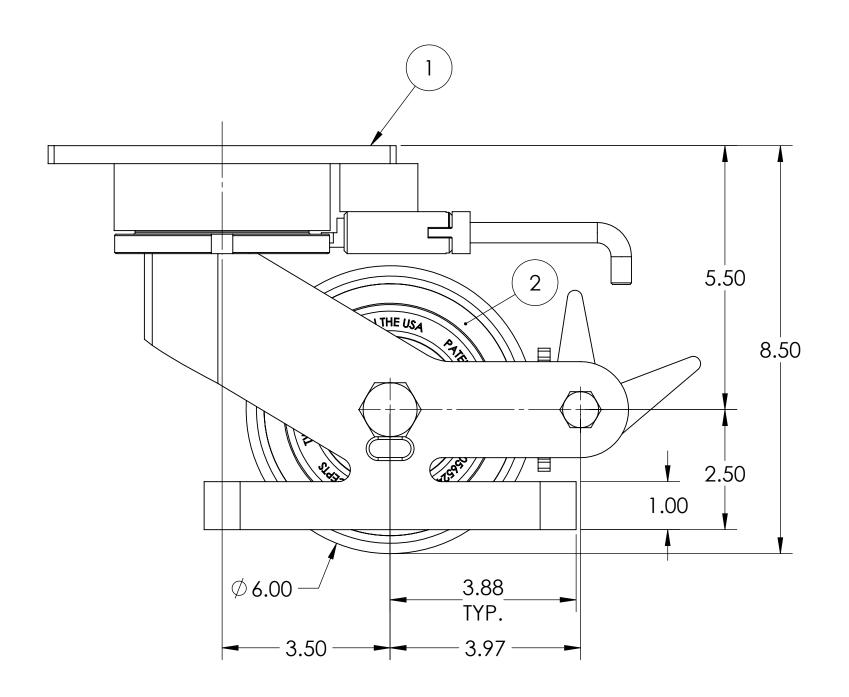

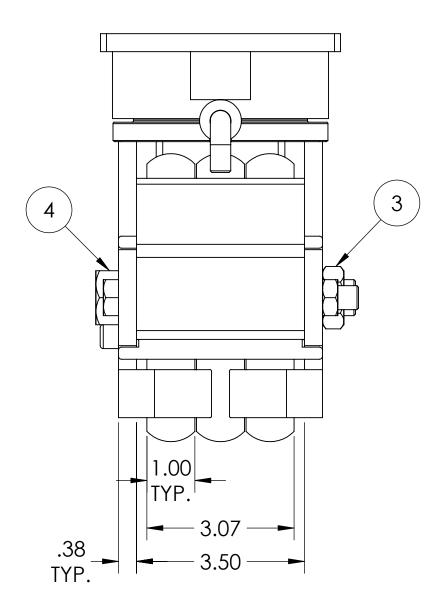

CASTER 16000 E. MICHIGAN AVE. ALBION, MI 49224 CONCEPTS, INC. (517)629-8838 casterconcepts.com	TOLERANCE SPECS.	UNLESS OTHERWISE SPECIFIED THE FOLLOWING TOLERANCES APPLY: $.XX = \pm .030$ $.XXX = \pm .010$ $X^{\circ} = \pm 1.0^{\circ}$ PART TO BE FREE OF BURRS AND SHARP EDGES		DESCRIPTION:	SCRIPTION: 77-06302-94-1HDLPTGSP				
				PART/DRAWING	GNO: SP18120603HDLPTG	DATE:	8/26/20	20	
WHERE USED:	FINISH SPECS.	ZINC PLATING ON RIG			SCALE:	1:2	C-SIZE		
CHECKED BY: PRAVEEN K.	MATERIAL SPECS.	APPROVED BY:		DRAWN BY	ARUN S.	THIRD ANGL	E	(