

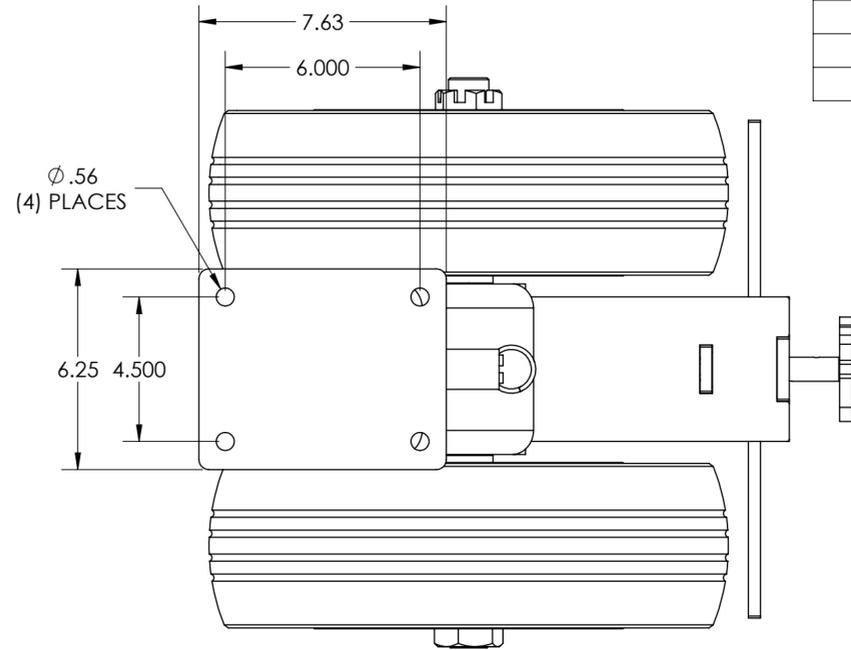


ITEM NO.	QTY.	PART/DRAWING NO.	DESCRIPTION	MATERIAL
1	1	2-81-16600-01-1LF	2-81 SER. 16.00 X 6.00 PNEU. SWL. RIG C/W SL & FCB (1.25" AXLE BORE)	MISC.
2	2	16509-78-20	Ø16.00 X 5.125 SOLID PNEUMATIC WHEEL	MISC.
3	1	SN201216	1-1/4 -12 SLOTTED JAM NUT ZINC PLATED	STEEL
4	4	SB202407	1-1/4 X 1-1/2 X .406 SPACER	SINTERED IRON
5	2	SB202411	1-1/4 X 1-1/2 X 21/32 SPACER	AISI 1026
6	1	SB202473	1-1/4 X 1-1/2 X 4-9/16 SPANNER	AISI 1026
7	1	KY032800	3/16 X 1-3/4 ROLL PIN	STEEL
8	1	AX2027200	1-1/4-12 X 17.00 LGT. PNEU. AXLE	STEEL

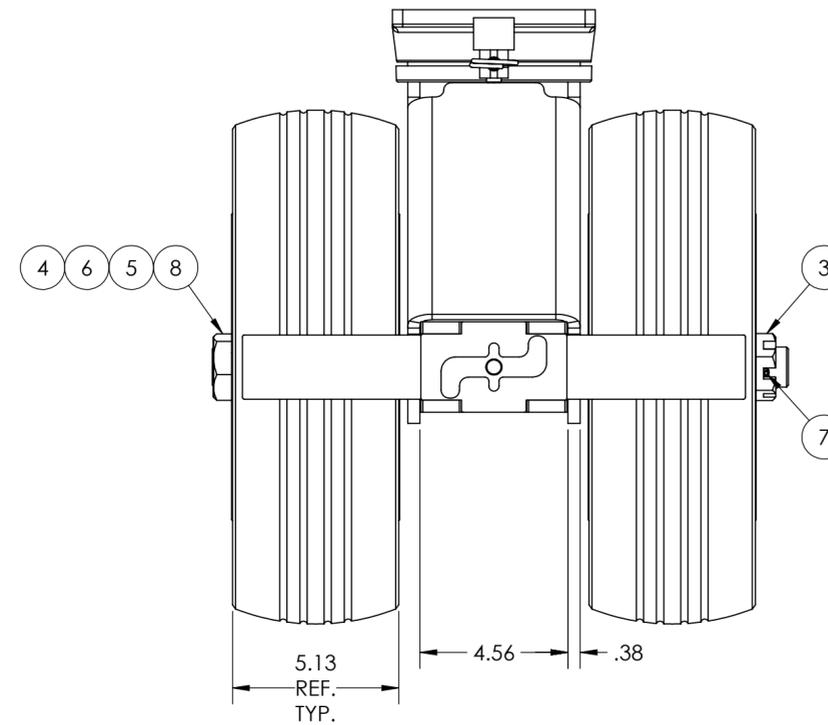

NOTES:

1. CASTER IS RATED FOR 5,800 LBS AT WALKING SPEEDS, INTERMITTENT USE

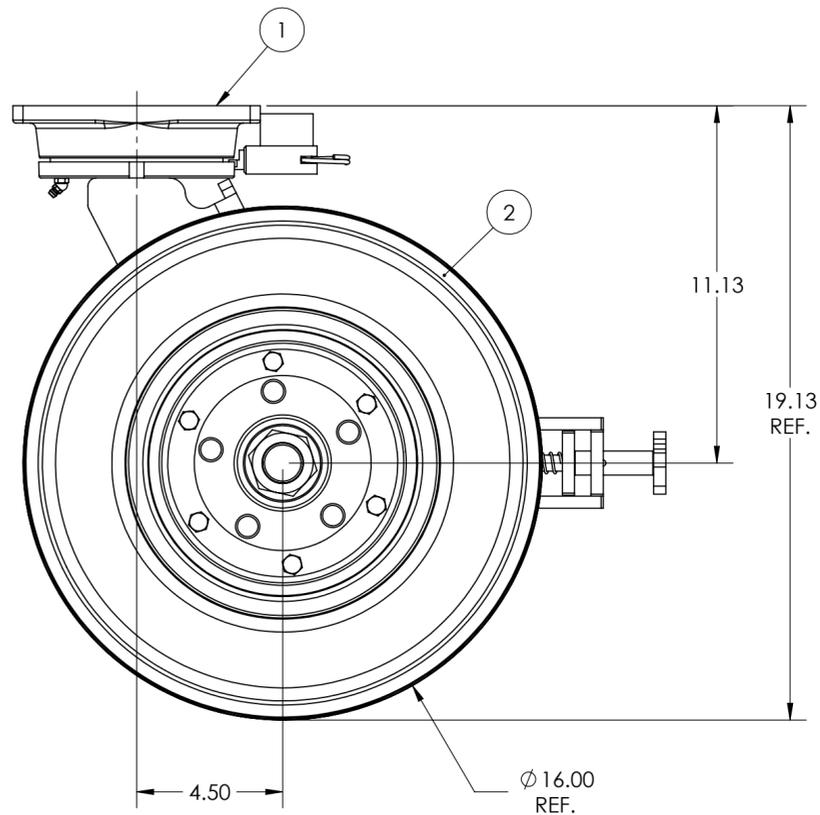


CASTER CONCEPTS, INC.
 16000 E. MICHIGAN AVE.
 ALBION, MI 49224
 (517) 629-8838
 casterconcepts.com

TOLERANCE SPECS.

UNLESS OTHERWISE SPECIFIED THE FOLLOWING TOLERANCES APPLY:
 .XX = ±.030 .XXX = ±.010 X° = ±1.0°
 PART TO BE FREE OF BURRS AND SHARP EDGES

DESCRIPTION: 2-81 SER. 16.00 X 5.00 PNEU. SWL. CASTER C/W SL & FCB

PART/DRAWING NO: 2-81-16509-78-11F DATE: 1/9/2019

WHERE USED:

FINISH SPECS.

GOLD POWDER COAT ON RIG

SCALE: 1:4 C-SIZE

CHECKED BY: NEKIBUR R.

MATERIAL SPECS.

APPROVED BY:

DRAWN BY ARUN S.

THIRD ANGLE 