



ITEM NO.	QTY.	PART/DRAWING NO.	DESCRIPTION	MATERIAL
1	1	81-10400-00-1P	81 SER. 10.00 X 4.00 SWL RIG C/W PLB	MISC.
2	1	10409-96-16	Ø10.00 X 4.00 T/R-95 TB POLY WHEEL	MISC.
3	1	AX169600	1-14 X 6 GRADE 5 HHCS	AISI 1038
4	1	LN161413	1"-14 LOW HEIGHT FLEXLOC NUT	STEEL

NOTE:

1. CASTER IS RATED FOR 5,850LBS AT WALKING SPEEDS, INTERMITTENT USE

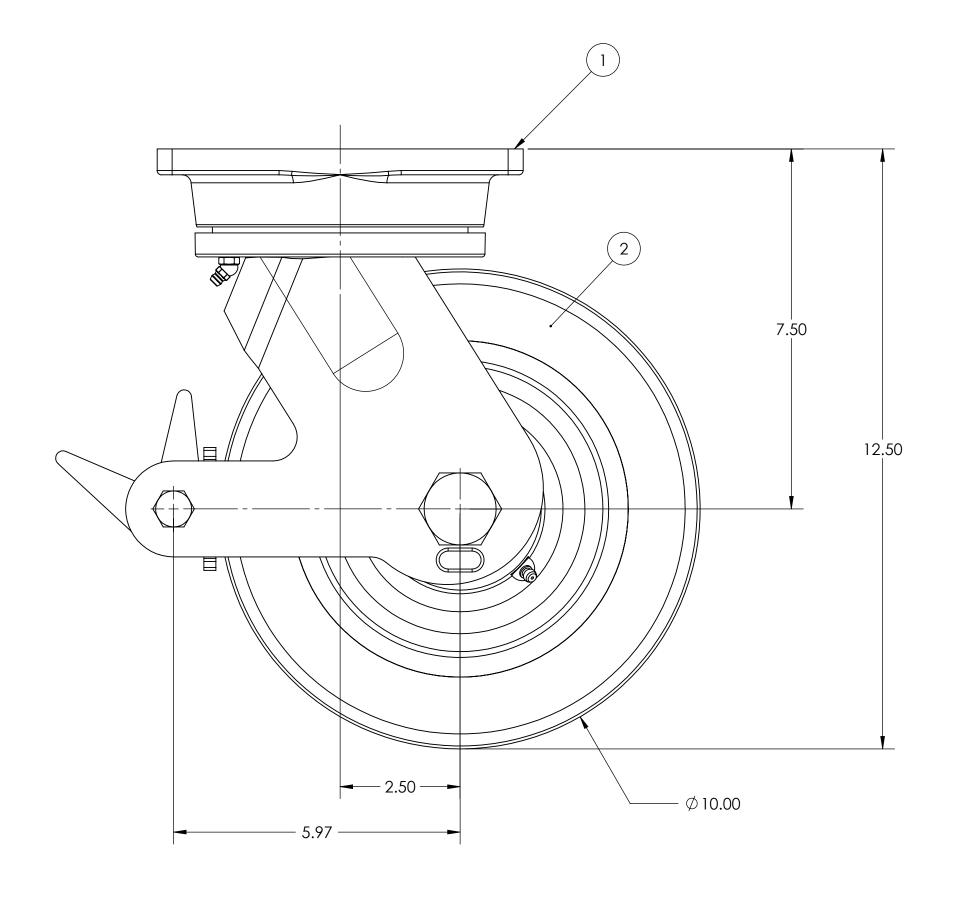

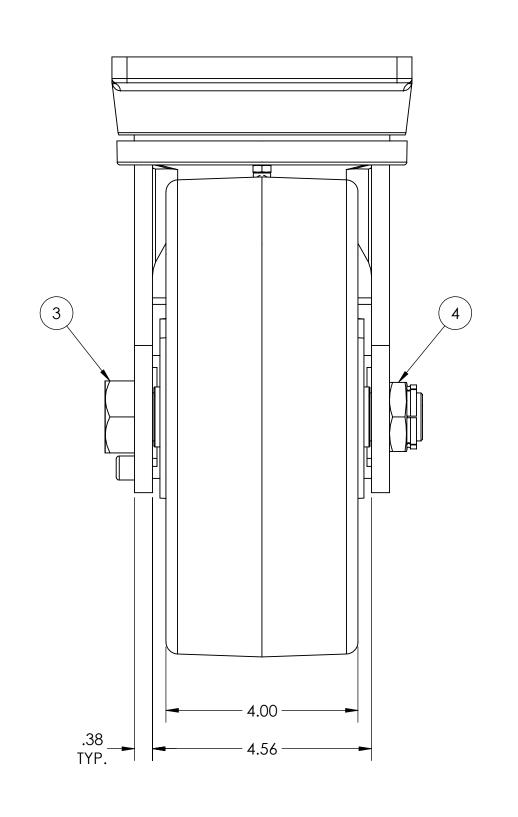

CASTER 16000 E. MICHIGAN AVE.	TOLERANCE SPECS.	UNLESS OTHERWISE SPECIFIED THE FOLLOWING TOLERANCES APPLY: $.XX = \pm .030$ $.XXX = \pm .010$ $X^{\circ} = \pm 1.0^{\circ}$ PART TO BE FREE OF BURRS AND SHARP EDGES		description:	: 81 SER. 10.00 X 4.00 SWL. CASTER C/W PLB			
CASTER ALBION, MI 49224 CONCEPTS, INC. (517)629-8838 casterconcepts.com				PART/DRAWING NO): 81-10409-96-1P	DATE:	4/4/2024	4
WHERE USED:	FINISH SPECS.	GOLD POWDER COATING ON RIG, GRAY PAINT ON WHEEL CORE				SCALE:	1:2	C-SIZE
CHECKED BY: PRAVEEN K.	MATERIAL SPECS.	APPROVED BY:]	DRAWN BY: AN	SHIKA G.	THIRD ANGL	E	(+)