


ITEM NO.	QTY.	PART/DRAWING NO.	DESCRIPTION	MATERIAL		
1	1	57-06200-00-1HDLPTG	57 SER. 6.00 X 2.00 SWL. RIG C/W HDSL ,PLB & TG	MISC.		
2	1	06202-94-08	Ø6.00 X 2.00 TWERGO WHEEL T/R-95	MISC.		
3	1	AX085400	1/2-20 X 3-3/8 SOLID AXLE ZINC	AISI 1038		
4	1	LN08200	1/2-20 TOP LOCK NUT	AISI 1038		

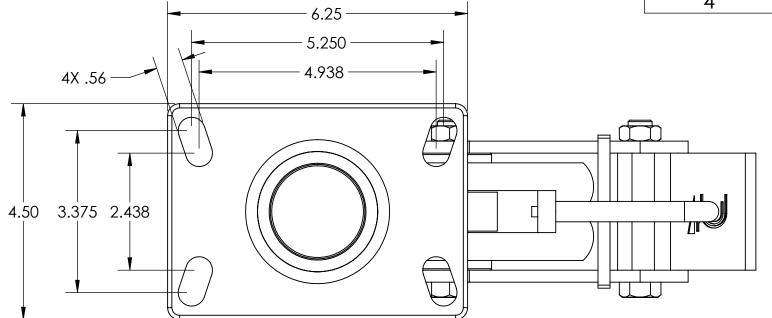

NOTES:

- 1. CASTER IS RATED FOR 1,400 LBS AT WALKING SPEEDS, INTERMITTENT USE.
- 2. AT 1,400 LBS OF LOAD THERE WILL BE A CALCULATED FLOOR LOAD OF 1,022 PSI.
- 3. ESTIMATED COF OF ROLLING RESISTANCE IS 3% OF LOAD TO START MOVING AND 1% OF LOAD TO MAINTAIN. (THIS IS FIGURING 2 SWIVEL AND 2 RIGID CASTERS ON SMOOTH, FLAT CONCRETE) APPLICATION AND FLOOR CONDITIONS WILL IMPACT THIS.
- 4. CASTER WEIGHT: 16.11 LBS.

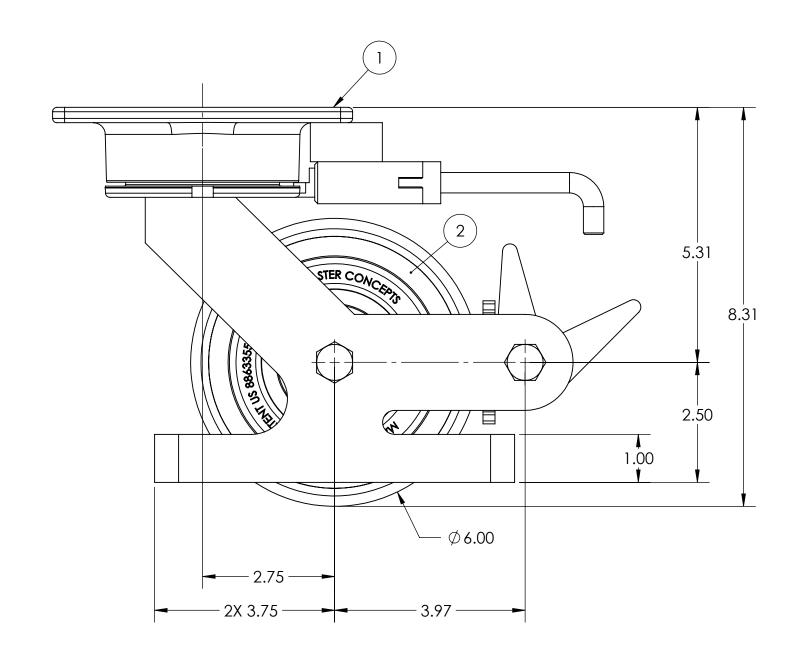

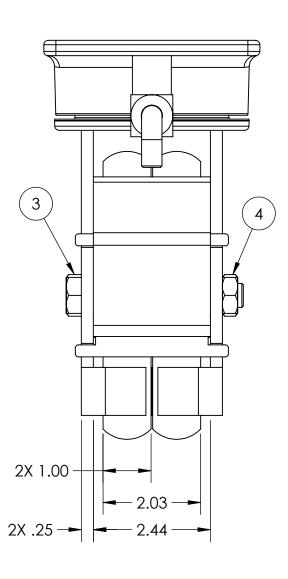

CASTER 16000 E. MICHIGAN AVE.	TOLERANCE SPECS.	UNLESS OTHERWISE SPECIFIED THE FOLLOWING TOLERANCES APPLY: $.XX = \pm .030$ $.XXX = \pm .010$ $X^{\circ} = \pm 1.0^{\circ}$ PART TO BE FREE OF BURRS AND SHARP EDGES		DESCRIPTIO	N: 3	57-06202-94-1HDLPTGSP			
CASTER ALBION, MI 49224 CONCEPTS, INC. (517)629-8838 casterconcepts.com				PART/DRAWING	NO:	SP18120103HDLPTG	DATE:	7/14/202	25
WHERE USED:	FINISH SPECS.	ZINC PLATING ON RIG					SCALE:	1:2	C-SIZE
CHECKED BY: ANSHIKA G.	MATERIAL SPECS.	APPROVED BY:]	DRAWN BY:	BRIJ	MOHAN	THIRD ANGLE		(++++++++++++++++++++++++++++++++++++